



SPEC ACCEL™ ACC Result

Copyright 2014-2015 Standard Performance Evaluation Corporation

GIGABYTE

(Test Sponsor: Cirrascale Corporation)

FirePro s9150


GIGABYTE MD70-HB0 Motherboard

SPECaccel_acc_peak = Not Run

SPECaccel_acc_base = 3.60

ACCEL license: 3842
Test sponsor: Cirrascale Corporation
Tested by: PathScale Inc.

Test date: May-2015
Hardware Availability: Sep-2014
Software Availability: Mar-2015

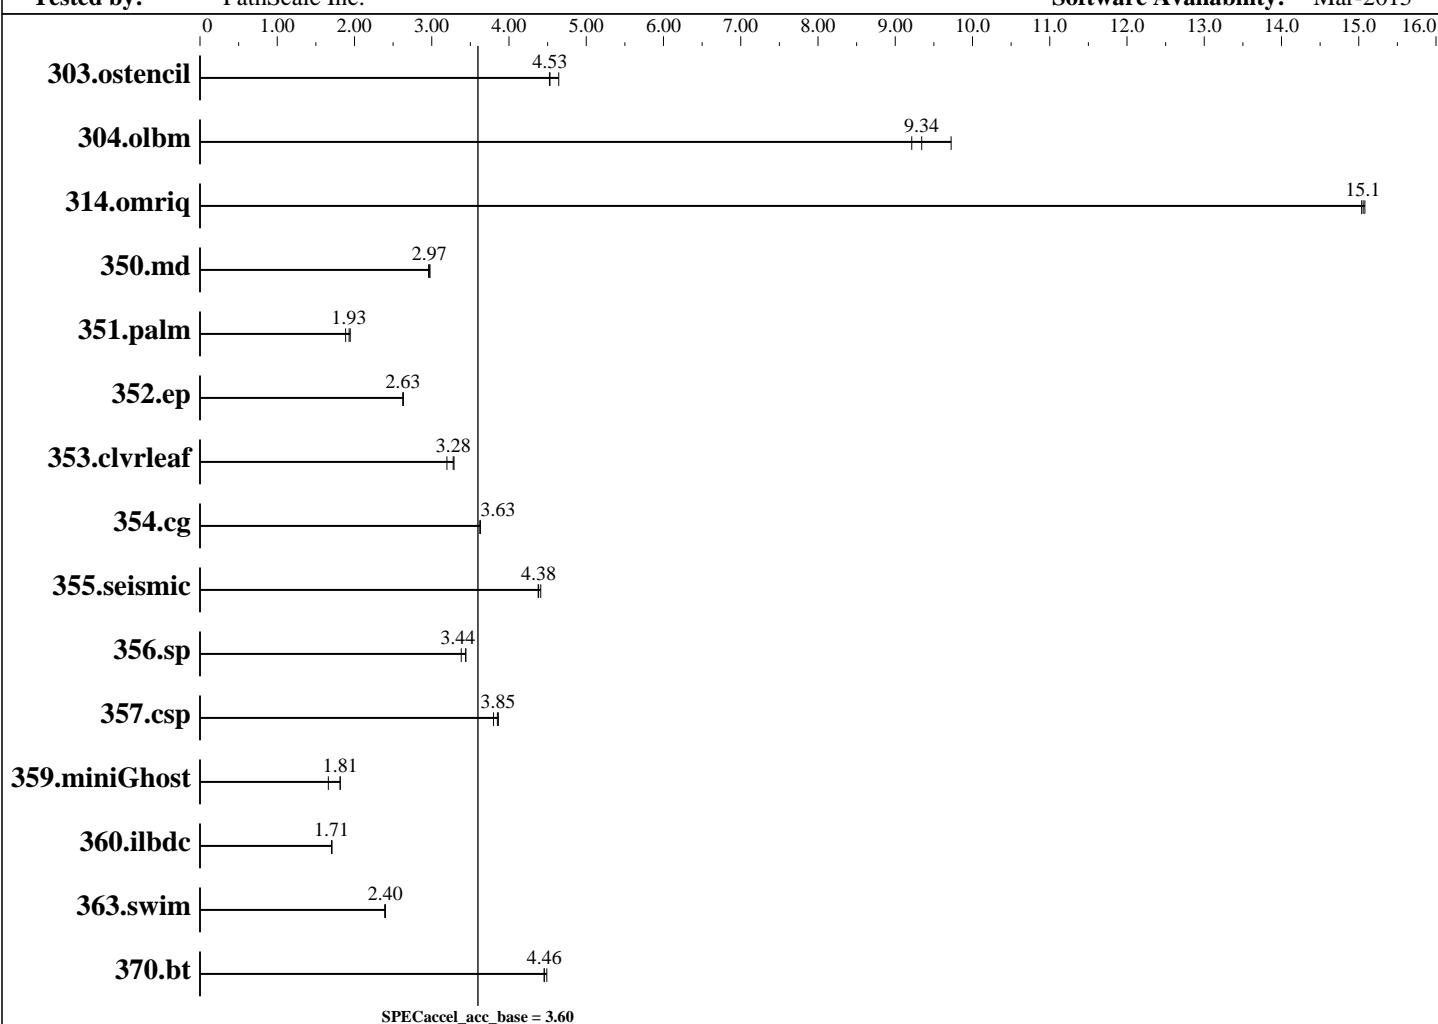

Hardware

CPU Name: Intel Xeon E5-2637 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 3500
CPU MHz Maximum: 3700
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 15 MB I+D on chip per chip
Other Cache: None

Accelerator

Accel Model Name: AMD FirePro s9150
Accel Vendor: AMD
Accel Name: FirePro s9150
Type of Accel: GPU
Accel Connection: PCIe 3.0 16x
Does Accel Use ECC: No
Accel Description: GPU set to high performance of sclk: 86100 mclk: 125000. See notes below.
Accel Driver: AMD ATI Radeon Linux x86_64 Kernel Module 3.19.0+

Continued on next page



SPEC ACCEL ACC Result

Copyright 2014-2015 Standard Performance Evaluation Corporation

GIGABYTE

(Test Sponsor: Cirrascale Corporation)

FirePro s9150

GIGABYTE MD70-HB0 Motherboard

SPECaccel_acc_peak = Not Run

SPECaccel_acc_base = 3.60

ACCEL license: 3842

Test sponsor: Cirrascale Corporation

Tested by: PathScale Inc.

Test date: May-2015

Hardware Availability: Sep-2014

Software Availability: Mar-2015

Hardware (Continued)

Memory: 32 GB (4 x 8 GB 1Rx4 PC4-2133R-15, running at 2133 MHz)

Disk Subsystem: Western Digital Model: WD7500BPKT-00PK4T0 750GB SATA 7200 rpm

Other Hardware: None

Software

Operating System: CentOS release 6.6 (Final) 4.0.0-rc6PathScale+

Compiler: PathScale ENZO 2015 v6.0

File System: ext4

System State: Run level 3 (add definition here)

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
303.ostencil	31.2	4.64	32.1	4.52	32.0	4.53						
304.olbm	49.4	9.21	46.8	9.72	48.7	9.34						
314.omriq	63.5	15.1	63.4	15.1	63.6	15.0						
350.md	85.2	2.96	84.6	2.98	84.9	2.97						
351.palm	190	1.94	196	1.89	192	1.93						
352.ep	202	2.63	202	2.63	201	2.63						
353.clvrlaf	139	3.20	136	3.28	135	3.29						
354.cg	112	3.63	112	3.63	113	3.62						
355.seismic	83.9	4.41	84.4	4.38	84.5	4.38						
356.sp	81.6	3.38	80.2	3.44	80.2	3.44						
357.csp	71.1	3.80	70.1	3.85	69.9	3.86						
359.miniGhost	222	1.66	203	1.81	203	1.82						
360.ilbdc	215	1.71	215	1.71	215	1.71						
363.swim	96.2	2.39	95.8	2.40	95.8	2.40						
370.bt	50.1	4.46	49.7	4.49	50.0	4.46						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Sysinfo program /home/pathscale/ACCEL/Docs/sysinfo
$Rev: 6874 $ $Date:: 2013-11-20 #$
running on Cirrascale Tue May 12 20:05:30 2015
```

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC ACCEL ACC Result

Copyright 2014-2015 Standard Performance Evaluation Corporation

GIGABYTE

(Test Sponsor: Cirrascale Corporation)

FirePro s9150

GIGABYTE MD70-HB0 Motherboard

ACCEL license: 3842

Test sponsor: Cirrascale Corporation

Tested by: PathScale Inc.

SPECaccel_acc_peak = Not Run

SPECaccel_acc_base = 3.60

Test date: May-2015

Hardware Availability: Sep-2014

Software Availability: Mar-2015

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:

<http://www.spec.org/accel/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2637 v3 @ 3.50GHz
        2 "physical id"s (chips)
        16 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 4
        siblings : 8
        physical 0: cores 0 1 4 5
        physical 1: cores 0 1 4 5
    cache size : 15360 KB
```

```
From /proc/meminfo
    MemTotal:      32945984 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
CentOS release 6.6 (Final)
```

```
From /etc/*release* /etc/*version*
centos-release: CentOS release 6.6 (Final)
redhat-release: CentOS release 6.6 (Final)
system-release: CentOS release 6.6 (Final)
system-release-cpe: cpe:/o:centos:linux:6:GA
```

```
uname -a:
Linux Cirrascale 4.0.0-rc6PathScale+ #8 SMP Fri Apr 3 11:56:23 PDT 2015
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 11 19:01
```

```
SPEC is set to: /home/pathscale/ACCEL
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda1        ext4   96G   82G   9.2G  90% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS GIGABYTE F15 11/28/2014
Memory:
4x Kinston 9995589-001.A00G 8 GB 1 rank 2133 MHz
Continued on next page
```



SPEC ACCEL ACC Result

Copyright 2014-2015 Standard Performance Evaluation Corporation

GIGABYTE

(Test Sponsor: Cirrascale Corporation)

FirePro s9150

GIGABYTE MD70-HB0 Motherboard

ACCEL license: 3842

Test sponsor: Cirrascale Corporation

Tested by: PathScale Inc.

SPECaccel_acc_peak = Not Run

SPECaccel_acc_base = 3.60

Test date: May-2015

Hardware Availability: Sep-2014

Software Availability: Mar-2015

Platform Notes (Continued)

12x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

ECC disabled by default

GPU Boost mode enabled by setting the device to the following below
high performance mode: "echo high > /sys/class/drm/card0/device/power_dpm_force_performance_level"

The details for high performance mode: cat /sys/kernel/debug/dri/64/radeon_pm_info

uvd disabled

vce disabled

power level avg sclk: 86100 mclk: 125000

The Intel documentation says the CPU can boost to 3700 Mhz, but dmidecode reports Max Speed: 3600 MHz
Kit built system using no case and just mounted on a test bench

Base Compiler Invocation

C benchmarks:
pathcc

Fortran benchmarks:
pathf90

Benchmarks using both Fortran and C:
pathcc pathf90

Base Portability Flags

314.omriq: -std=gnu89

Base Optimization Flags

C benchmarks:
-O3 -acc -device=hawaii

Fortran benchmarks:
-O3 -acc -device=hawaii

Benchmarks using both Fortran and C:
-O3 -acc -device=hawaii



SPEC ACCEL ACC Result

Copyright 2014-2015 Standard Performance Evaluation Corporation

GIGABYTE

(Test Sponsor: Cirrascale Corporation)

FirePro s9150

GIGABYTE MD70-HB0 Motherboard

ACCEL license: 3842

Test sponsor: Cirrascale Corporation

Tested by: PathScale Inc.

SPECaccel_acc_peak = Not Run

SPECaccel_acc_base = 3.60

Test date: May-2015

Hardware Availability: Sep-2014

Software Availability: Mar-2015

The flags file that was used to format this result can be browsed at

http://www.spec.org/accel/flags/pathscale2015_flags.20150318.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/accel/flags/pathscale2015_flags.20150318.xml

SPEC ACCEL is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC ACCEL v1.0.

Report generated on Wed Jun 3 13:43:47 2015 by SPEC ACCEL PS/PDF formatter v1290.

Originally published on 3 June 2015.