




CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
hp server rx5670 (1000 MHz, Itanium 2)

SPECfp_rate2000 = 30.7
SPECfp_rate_base2000 = 30.7

SPEC license #: 3 Tested by: HP Richardson Test date: Nov-2002 Hardware Avail: Sep-2002 Software Avail: Nov-2002

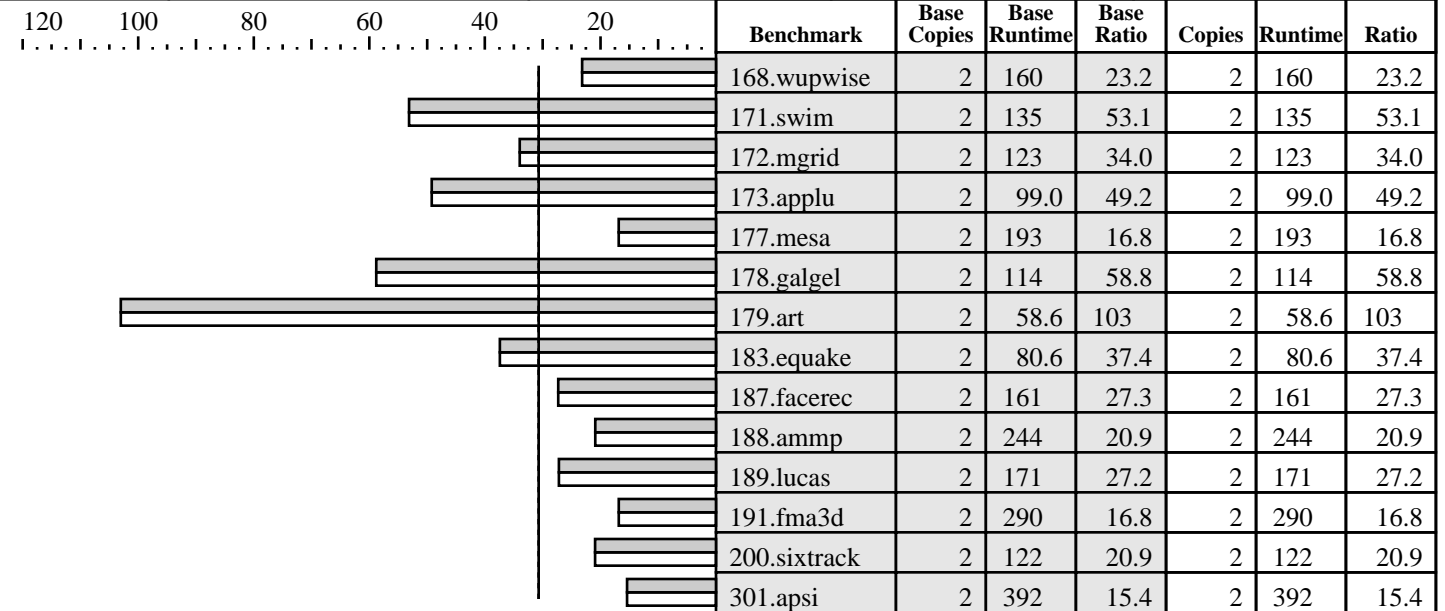

Hardware

CPU: Intel Itanium 2
 CPU MHz: 1000
 FPU: Integrated
 CPU(s) enabled: 2 cores, 2 chips, 1 core/chip
 CPU(s) orderable: 1-4
 Parallel: no
 Primary Cache: 16KBI + 16KBD (on chip) per CPU
 Secondary Cache: 256KB (on chip) per CPU
 L3 Cache: 3.0MB (on chip) per CPU
 Other Cache: N/A
 Memory: 12GB (48 * 256MB DIMMs - 2 memory carriers)
 Disk Subsystem: 1x73GB SCSI disk
 Other Hardware: N/A

Software

Operating System: Red Hat Linux Advanced Server 2.1 for the Itanium Processor
 Compiler: Intel(R) C++ Compiler for Linux 7.0
 Intel(R) Fortran Compiler for Linux 7.0
 File System: ext3
 System State: Multi-user

Notes/Tuning Information

```
+FDO: PASS1=-prof_gen PASS2=-prof_use
Base tuning:
C programs:      -ipo -O3 +FDO -ansi_alias
Fortran programs: -ipo -O3 +FDO
Portability:
178.galgel: -FI
```

Peak flags same as baseline (basepeak=true set globally)

Note:
 EFI shell utility 'cpuconfig' used
 to deconfigure other processors