




CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEPOWER650 (1080MHz)

SPECint_rate2000 = 65.4
SPECint_rate_base2000 = 56.4

SPEC license #: 19 Tested by: Fujitsu Limited Test date: May-2003 Hardware Avail: Jul-2003 Software Avail: May-2003

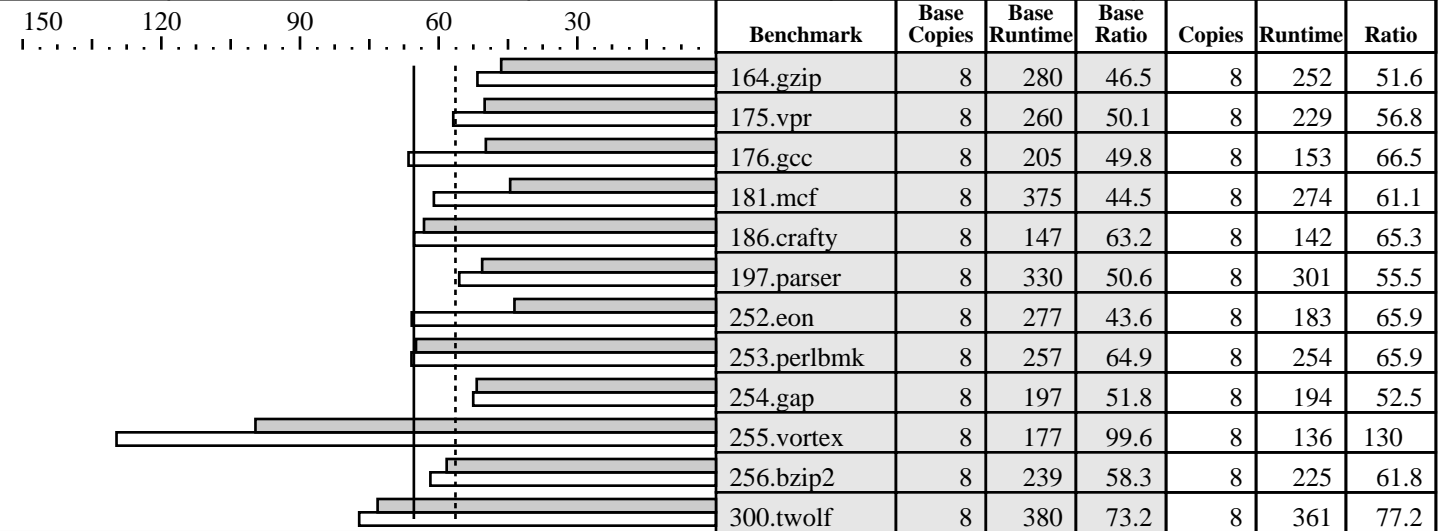

Hardware

CPU: SPARC64 V
 CPU MHz: 1080
 FPU: Integrated
 CPU(s) enabled: 8 cores, 8 chips, 1 core/chip
 CPU(s) orderable: 1 to 8 (increments of 1)
 Parallel: None
 Primary Cache: 128KBI+128KBD on chip
 Secondary Cache: 2MB(I+D) on chip
 L3 Cache: None
 Other Cache: None
 Memory: 32768MB
 Disk Subsystem: 1 x 36.4GB SCSI (10000rpm)
 Other Hardware: None

Software

Operating System: Solaris8 2/02 with current patches (see notes)
 Compiler: Fujitsu Parallelnavi 1.0.2
 Sun ONE Studio 8
 (EA2 version of Sun ONE Studio 8 used)
 Sun Performance Library 8
 File System: ufs
 System State: multi user

Notes/Tuning Information

Baseline (except 252.eon, for Sun ONE Studio 8 EA2):

```
-fast -xtarget=ultra3cu -xipo=2 ONESTEP=yes
fdo_pre0=rm -rf ./feedback.profile ./SunWS_cache
PASS1=-xprofile=collect:./feedback
PASS2=-xprofile=use:./feedback
```

(252.eon, for Sun ONE Studio 8 EA2):

```
-fast -xchip=ultra3cu -xarch=v8plusb -xipo=2 ONESTEP=yes
```

Peak

(for Sun ONE Studio 8 EA2)

```
fdo_pre0=rm -rf ./feedback.profile ./SunWS_cache
PASS1=-xprofile=collect:./feedback
PASS2=-xprofile=use:./feedback
```

```
164.gzip: -xO5 -xchip=ultra2 -xcache=128/64/2:2048/64/4 -xarch=v8plusb -xipo=2
```

```
-xalias_level=std -xprefetch -xprefetch_level=2 -W2,-whole,-Ainline ONESTEP=yes
```

```
175.vpr: -fast -xchip=ultra2 -xcache=128/64/2:2048/64/4 -xarch=v8plusb
```

```
-xalias_level=std -xipo=2 -xsfpconst -xdepend -W2,-whole
```

```
-Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,-Qeps:rp_filtering_margin=100
```

```
-lmopt -lm ONESTEP=yes
```

```
176.gcc: -fast -xchip=ultra3 -xcache=128/64/2:2048/64/4 -xarch=v8plusb
```

```
-xipo=2 -xprefetch=latx:2.0 -W2,whole
```



CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEPOWER650 (1080MHz)

SPECint_rate2000 = 65.4
SPECint_rate_base2000 = 56.4

SPEC license #: 19 | Tested by: Fujitsu Limited | Test date: May-2003 | Hardware Avail: Jul-2003 | Software Avail: May-2003

Notes/Tuning Information (Continued)

```

-Wc,-Qgsched-trace_late=1,-Qgsched-T4 -l12amm ONESTEP=yes
181.mcf: -fast -xchip=ultra2 -xcache=128/64/2:2048/64/4 -xarch=v8plusb
-xipo=2 -xdepend -Wc,-Qms_pipe-pref,-Qeps:enabled=1 -xprefetch_level=3
-W2,-Apf:l1list=3:noninnerl1list -lprism32 ONESTEP=yes
186.crafty: -fast -xchip=ultra3cu -xcache=128/64/2:2048/64/4
-xarch=v8plusb -xipo=2 -xalias_level=strong -xprefetch=latx:1.2
-W2,-Ashort_ldst ONESTEP=yes
197.parser: -fast -xchip=ultra3cu -xcache=128/64/2:2048/64/4 -xarch=v8plusb
-xipo=2 -xalias_level=strong -xdepend -xregs=syst
-Wc,-Qgsched-trace_late=1,-Qgsched-T6,-Qipa:valueprediction -lprism32 ONESTEP=yes
252.eon: -fast -xchip=ultra3 -xcache=128/64/2:2048/64/4 -xarch=v8plusb -xipo=2
-xregs=syst -xalias_level=compatible -noex -xunroll=3 -xprefetch=latx:0.8
-Qoption cg -Qgsched-trace_late=1,-Qgsched-T4,-Qeps:enabled=1,-Qeps:ws=32
-Qoption iropt -Mt2000 -lmopt ONESTEP=yes
253.perlbnk: -dn -xO5 -xchip=ultra3 -xcache=128/64/2:2048/64/4
-xarch=v8plus -xipo=2 ONESTEP=yes
254.gap: -fast -xchip=ultra3 -xcache=128/64/2:2048/64/4
-xarch=v8plusb -xipo=2 -xalias_level=strong -xvector -xprefetch_level=3
-W2,-whole,-Abcopy -Wc,-Qgsched-trace_late=1,-Qgsched-T4 ONESTEP=yes
255.vortex: -fast -xchip=ultra2 -xcache=128/64/2:2048/64/4
-xarch=v8plusb -xrestrict -xipo=2 -xdepend -xprefetch=latx:2.4
-W2,-crit,Ainline:recursion=1:cs=500:irs=6000,-Aheap,-reroll=1,-Aunroll,-Ms15,-Mt300,-Mr6000
-Wc,Qeps:enabled=1,-Qeps:do_spec_load=1,-Qdepgraph-early_cross_call=1
-Wc,-Qiselect-funcalign=32,-Qpeep-Sh0 -l12amm -lprism32 ONESTEP=yes
256.bzip2: -fast -xchip=ultra3 -xcache=128/64/2:2048/64/4
-xarch=v8plusb -xipo -xalias_level=strong -xdepend -xregs=syst
-xrestrict -xprefetch=latx:1.6 -W2,-Abopt
-Wc,-Qiselect-funcalign=64,-Qeps:enabled=1 ONESTEP=yes
(for Parallelnavi 1.0.2)
300.twolf: -Kfast_GP=5,GREG,popt,cfunc,staticclump,use_rodata,
xi=10,nounroll,largepage,bcopy,prefetch=4 -dy
PASS1=-Kpg
PASS2=-Kpu=$(EXEBASE).fbk
Portability:
176.gcc: -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
186.crafty: -DSUN
252.eon: -library=iostream
253.perlbnk: -DSPEC_CPU2000_SOLARIS
254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
-DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

```

Note:

```

System Tunables: (for /etc/system)
consistent_coloring=1,
set shmsys:shminfo_shmmax=4294967296,set shmsys:shminfo_shmmni=256,
set shmsys:shminfo_shmseg=400,set shmsys:shminfo_shmmin=1
set tune_t_fsflushr = 86400
set autoup = 86400
(for /etc/opt/FJSVpnm/lpg.conf)
TSS=2048M, SHMSEGSIZE=256M
Shell Environments:
LD_LIBRARY_PATH="/opt3/SUNWspro/prod/lib/v8plusb"
PRISM_HEAP=268435456
PRISM_MODE=2
ONESTEP=yes was set for all baseline and peak benchmarks.
Feedback directed optimization was used for all baseline and peak benchmarks
except 252.eon(base).

```



CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEPOWER650 (1080MHz)

SPECint_rate2000 = 65.4

SPECint_rate_base2000 = 56.4

SPEC license #: 19 | Tested by: Fujitsu Limited | Test date: May-2003 | Hardware Avail: Jul-2003 | Software Avail: May-2003

Notes/Tuning Information (Continued)

Stack size set to unlimited via "ulimit -s unlimited"

Sun ONE Studio 8 EA2 (Early Access 2), posted at URL <http://access1.sun.com/s1sprod/> as updated through 27-Mar-2003, was used for this submission.

Sun ONE Studio 8 (final) will ship May-2003.

All patches for Solaris8 posted at

http://access1.sun.com/patch.public/cgi-bin/show_list.cgi/wrk/Sun_ONE_Studio_7_SPARC_SunOS_5.8 as of date 2003/04/21 were applied: 108434-11, 108435-11, 111697-04, 111721-03.