




CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Altix 350 (1000MHz, Itanium 2)

SPECfp_rate2000 = **55.0**
SPECfp_rate_base2000 = **54.7**

SPEC license #: 4 | Tested by: SGI | Test date: Feb-2004 | Hardware Avail: Jan-2004 | Software Avail: Jan-2004

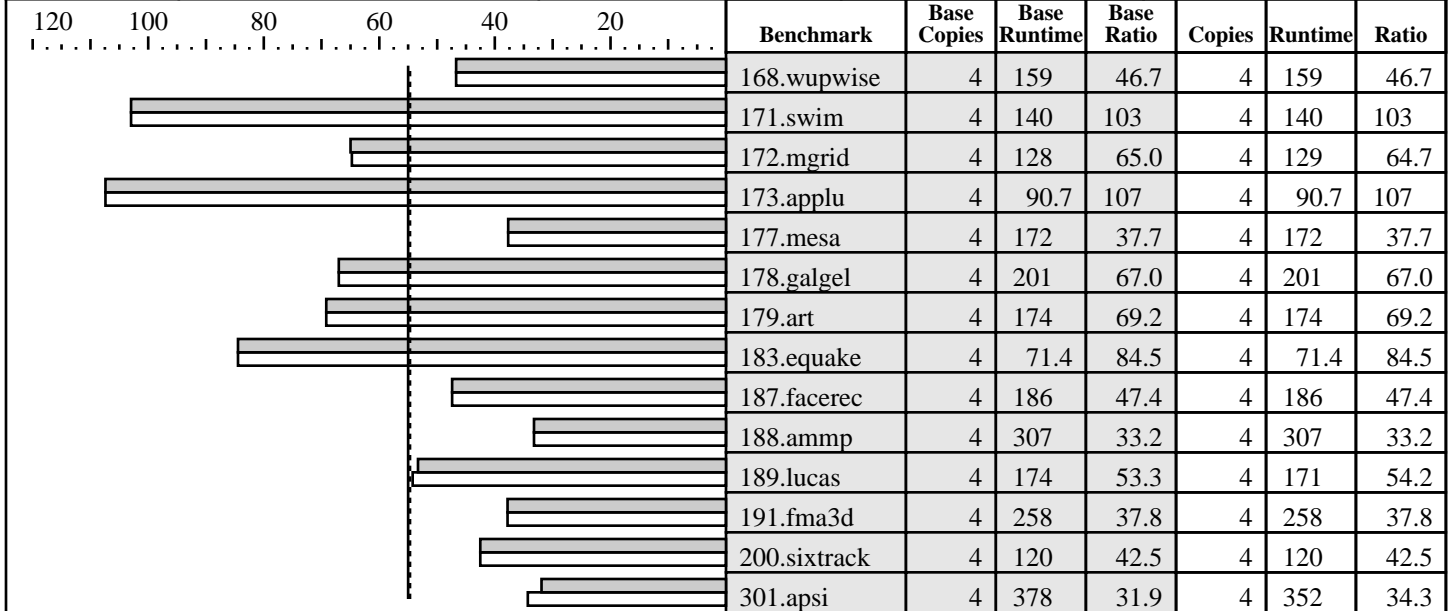

Hardware

CPU: Intel Itanium 2
 CPU MHz: 1000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 4 chips, 1 core/chip
 CPU(s) orderable: 2-16
 Parallel: No
 Primary Cache: 16KBI + 16KBD (on chip) per CPU
 Secondary Cache: 256KB (on chip) per CPU
 L3 Cache: 1.5MB (on chip) per CPU
 Other Cache: N/A
 Memory: 8 GB (8*512MB PC2700 DIMMS per 2cpu module)
 Disk Subsystem: 1 x 36 GB SCSI (Seagate Cheetah 15k rpm)
 Other Hardware: None

Software

Operating System: SGI ProPack(TM) v2.4
 Compiler: Intel(R) Fortran Compiler for Linux 8.0 (Build 20040101)
 Intel(R) C++ Compiler for Linux 8.0 (Build 20040101)
 File System: xfs
 System State: Single-user

Notes/Tuning Information

+FDO: PASS1=-prof_gen PASS2=-prof_use

Baseline optimization flags:

C programs: -ipo -O3 +FDO -ansi_alias
 Fortran programs: -ipo -O3 +FDO

Portability Flags:

178.galgel: -FI

Peak optimization flags:

168.wupwise: basepeak=yes
 171.swim: basepeak=yes
 172.mgrid: -O3 -ipo
 173.applu: basepeak=yes
 177.mesa: basepeak=yes
 178.galgel: basepeak=yes
 179.art: basepeak=yes



CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI

SGI Altix 350 (1000MHz, Itanium 2)

SPECfp_rate2000 = 55.0

SPECfp_rate_base2000 = 54.7

SPEC license #: 4 | Tested by: SGI | Test date: Feb-2004 | Hardware Avail: Jan-2004 | Software Avail: Jan-2004

Notes/Tuning Information (Continued)

183.equake: basepeak=yes
187.facerec: basepeak=yes
188.ammp: basepeak=yes
189.lucas: -O3 -ipo
191.fma3d: basepeak=yes
200.sixtrack: basepeak=yes
301.apsi: -O3 -ipo

Processes were bound to CPUs using dplace.