




CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant ML350 G4p (3.4GHz, Intel Xeon)

SPECfp_rate2000 = 30.7
SPECfp_rate_base2000 = 30.0

SPEC license #: 3 Tested by: Hewlett-Packard Company Test date: Mar-2005 Hardware Avail: Mar-2005 Software Avail: Nov-2004

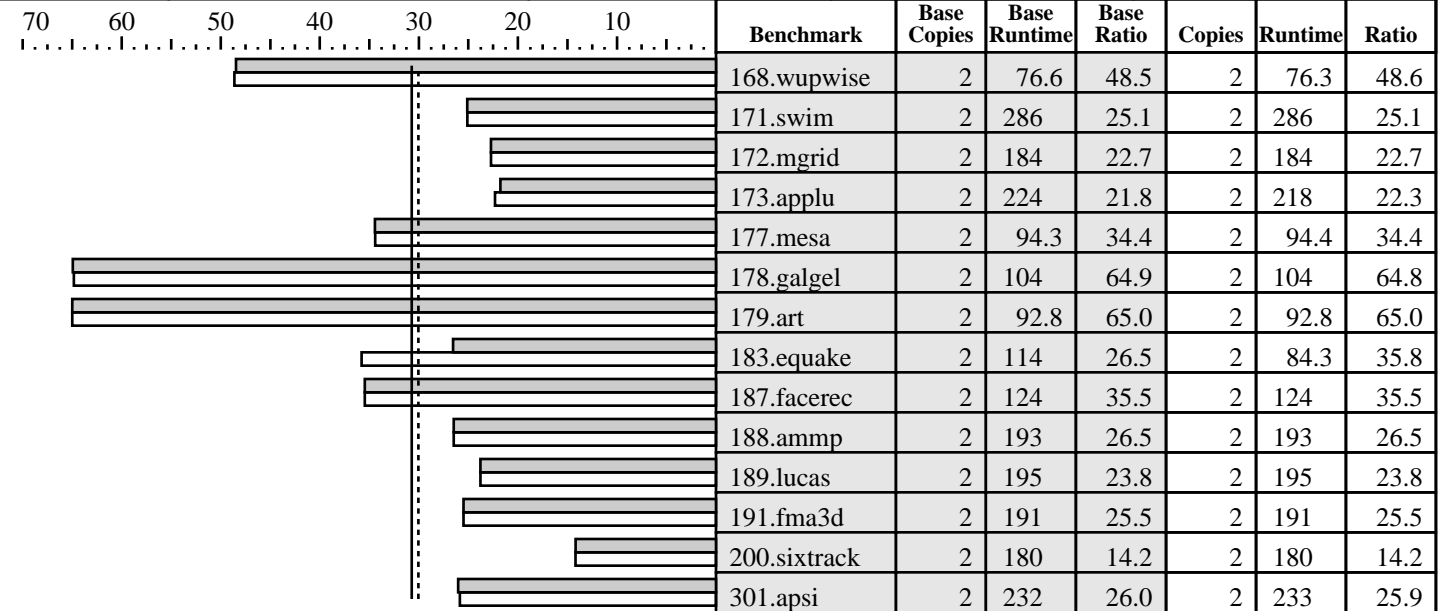

Hardware

CPU: Intel Xeon (3.4GHz, 2MB L2, 800MHz bus)
CPU MHz: 3400
FPU: Integrated
CPU(s) enabled: 2 cores, 2 chips, 1 core/chip (Hyper-Threading Technology disabled)
CPU(s) orderable: 1,2
Parallel: No
Primary Cache: 12K micro-ops I + 16KBD on chip
Secondary Cache: 2048KB(I+D) on chip
L3 Cache: N/A
Other Cache: N/A
Memory: 6x2048MB PC2-3200 CL3 Dual-Rank DIMMs
Disk Subsystem: 1x18.2GB 15K U320
Other Hardware:

Software

Operating System: Windows Server 2003 Standard (Build 3790)
Compiler: Intel C++ Compiler 8.1 Build 20040802Z
Intel Fortran Compiler 8.1 build 20040802Z
Microsoft Visual Studio .NET 7.0.9466 (for libraries)
MicroQuill Smartheap Library 7.0
File System: NTFS
System State: Default

Notes/Tuning Information

+FDO: PASS1=-Qprof_gen PASS2=-Qprof_use

Base tuning Base tuning: -fast -Qansi_alias +FDO

Portability flags:

178.galgel: -FI /F32000000

Peak tuning:

168.wupwise: -fast -Qansi_alias +FDO
171.swim: -fast -f77rtl +FDO ONESTEP=yes
172.mgrid: -fast -Qansi_alias +FDO
173.applu: -fast -Qscalar_rep- -Qauto -f77rtl +FDO ONESTEP=yes
177.mesa: -fast +FDO ONESTEP=yes
178.galgel: -fast +FDO ONESTEP=yes
179.art: basepeak=1
183.earthquake: -fast -Oa -Qrcd +FDO ONESTEP=yes shlw32M.lib
187.facerec: basepeak=1
188.amp: basepeak=1
189.lucas: -fast



CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant ML350 G4p (3.4GHz, Intel Xeon)

SPECfp_rate2000 = 30.7
SPECfp_rate_base2000 = 30.0

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Mar-2005 | Hardware Avail: Mar-2005 | Software Avail: Nov-2004

Notes/Tuning Information (Continued)

```
191.fma3d:      basepeak=1
200.sixtrack:   -fast                +FDO
301.apsi:       -fast                -f77rtl +FDO ONESTEP=yes
BIOS Configuration Notes
Hyper-Threading Technology disabled
```