




# CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices  
TYAN S2865 K8E Tomcat, AMD Opteron (TM) 170

SPECfp\_rate2000 = 31.3  
SPECfp\_rate\_base2000 = 29.4

SPEC license #: 49 Tested by: AMD, Austin, TX Test date: Jul-2005 Hardware Avail: Sep-2005 Software Avail: Aug-2005

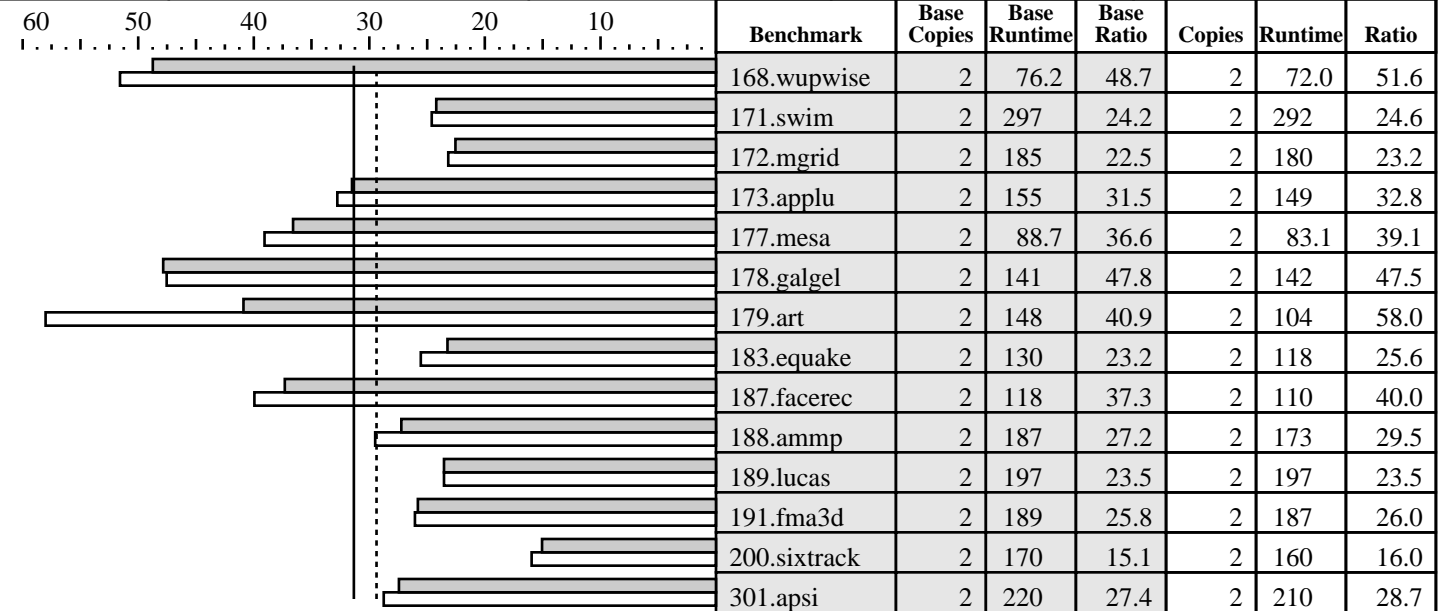

### Hardware

CPU: AMD Opteron (TM) 170 (939-pin)  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1  
 Parallel: No  
 Primary Cache: 64KBI + 64KBD/core  
 Secondary Cache: 1024KB (I+D)/core  
 L3 Cache: N/A  
 Other Cache: N/A  
 Memory: 4x512 MB, DDR400 CL2.0  
 Disk Subsystem: IDE, Hitachi HDS722516VLAT20 165G, 7200 rpm  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 9 SP2 for AMD64  
 Compiler: PathScale EKOPath(TM) Compiler Suite, Release 2.1  
 File System: Linux/ext3  
 System State: Multi-user, run level 3

## Notes/Tuning Information

Tested by AMD

```
+FDO: PASS1= -fb_create fbdata PASS2= -fb_opt fbdata
+ACML means -L/opt/acml2.5.1/pathscale64/lib -lacml,
           which causes linking with AMD Core Math Library V2.5.1
```

### Baseline optimization

```
C programs: -Ofast -WOPT:mem_opnds=on +FDO
Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
Portability Flags:
178.galgel: -fixedform
```

### Peak Tuning:

```
168.wupwise: -Ofast -LNO:prefetch Ahead=5:prefetch=3
             -OPT:unroll_times_max=8:unroll_size=128:IEEE NaN_Inf=off:ro=3
             -IPA:linear=on:plimit=50000:callee_limit=5000
             -INLINE:aggressive=on
```



# CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices  
TYAN S2865 K8E Tomcat, AMD Opteron (TM) 170

SPECfp\_rate2000 = 31.3  
SPECfp\_rate\_base2000 = 29.4

SPEC license #: 49 | Tested by: AMD, Austin, TX | Test date: Jul-2005 | Hardware Avail: Sep-2005 | Software Avail: Aug-2005

## Notes/Tuning Information (Continued)

```

171.swim:      -Ofast -LNO:fusion=2 -m3dnow
172.mgrid:    -O3 -LNO:fusion=2:blocking=off
              -OPT:Ofast:unroll_times_max=8:unroll_size=256:ro=3
              -CG:gcm=off:cflow=off -m3dnow
173.applu:    -Ofast -CG:local_fwd_sched=on
              -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3
              -OPT:ro=3 -TENV:X=3
177.mesa:     -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on +FDO
178.galgel:   -Ofast -OPT:fast_complex=on +ACML
179.art:      -O3 -OPT:ro=2:div_split=on:alias=typed -fno-math-errno -m32
183.earthquake: -Ofast -CG:load_exe=2 -OPT:treeheight=on -WOPT:mem_opnds=on
              -m32 +FDO
187.facerec:  -Ofast -OPT:IEEE_NaN_Inf=off:ro=3 -LNO:fusion=2
              -IPA:plimit=1500 +FDO
188.ammp:     -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
              -fno-math-errno -TENV:X=4 +FDO
189.lucas:    basepeak = true
191.fma3d:    -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
              -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack:= -O3 -OPT:Ofast:Olimit=6000 -fno-math-errno -CG:load_exe=1 +FDO
301.apsi:     -Ofast -TENV:X=4 -LNO:fusion=2:prefetch=0

```

Taskset utility used to bind CPU(s) to processes.

The tested system can be assembled using a standard ATX footprint, an Antec True 550 Watt EPS12V power supply, and a PCI or PCIe graphics card.

All memory slots were populated with Corsair CMX512-3200XL.

Memory timings manually set in BIOS: CAS=2, TRCD=2, TRAS=5, TRP=2

BIOS V2.00b