



CFP2000 Result


Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4100

SPECfp_rate2000 = 53.8

SPECfp_rate_base2000 = 48.9

SPEC license #: 6 Tested by: Sun Microsystems, Santa Clara Test date: Aug-2005 Hardware Avail: Oct-2005 Software Avail: Nov-2005

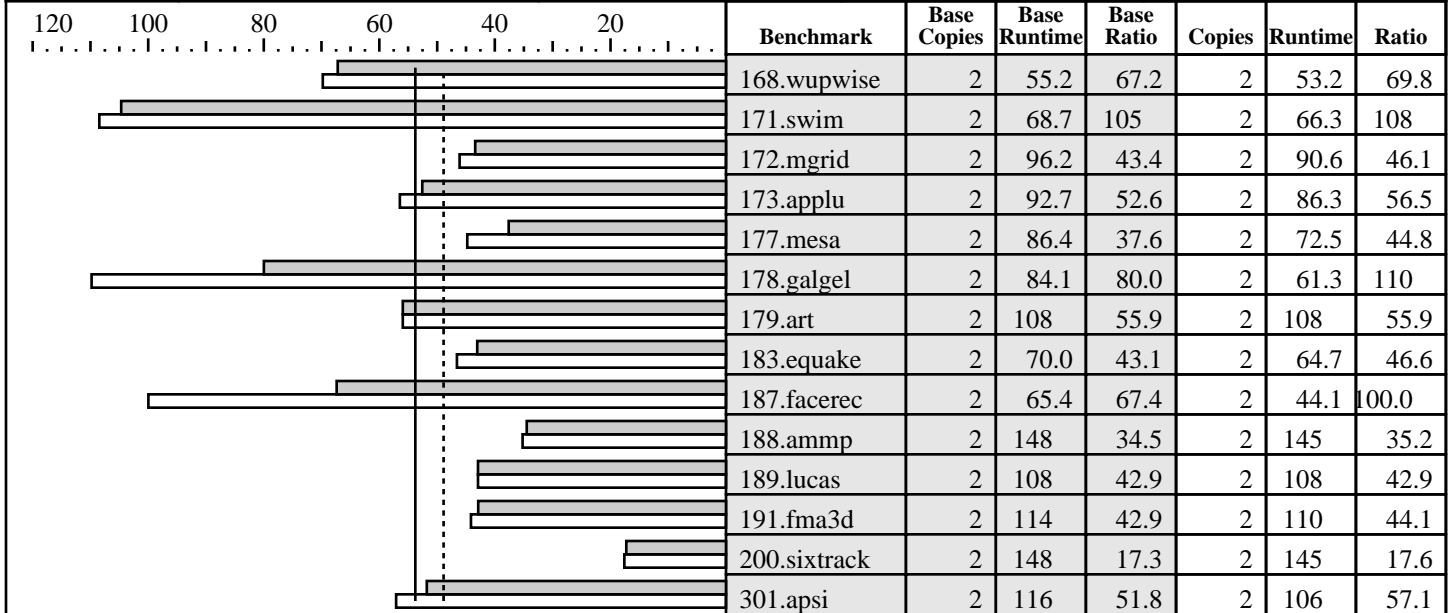

Hardware

CPU: AMD Opteron (TM) 254
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 2 cores, 2 chips, 1 core/chip
 CPU(s) orderable: 1,2 (order by # of chips)
 Parallel: No
 Primary Cache: 64KBI + 64KBD (on chip) per core
 Secondary Cache: 1024KB (I+D) (on chip) per core
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 16GB (8x2GB, PC3200 CL3 DDR SDRAM ECC Registered)
 Disk Subsystem: SAS, 36GB, 10K RPM
 Other Hardware: None

Software

Operating System: Solaris 10 3/05 HW1
 Compiler: Sun Studio 11
 File System: ufs
 System State: Multi-user

Notes/Tuning Information

Compiler invocation:

```
C: cc
F90: f90
F77: f90
```

```
FDO: PASS1= -xprofile=collect:./feedback PASS2= -xprofile=use:./feedback
fdo_pre0: rm -rf ./feedback.profile
```

Floating point base flags:

```
F90: -fast -xipo=2 -xarch=amd64 -xprefetch_level=3 ONESTEP=yes
C: -fast -xcrossfile -xalias_level=std -xpagesize=2m ONESTEP=yes
```

Floating point peak flags:

ONESTEP=yes for all benchmarks

```
168.wupwise: -fast -xpad=common:3969 -xipo=2 -xarch=amd64 -xprefetch_level=3 -xpagesize_heap=2m
```



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4100

SPECfp_rate2000 = 53.8

SPECfp_rate_base2000 = 48.9

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Aug-2005 | Hardware Avail: Oct-2005 | Software Avail: Nov-2005

Notes/Tuning Information (Continued)

```

171.swim:      -fast -xpad=common:3969 -xipo=2 -xvector=simd -xprefetch_level=3 -Qoption iropt
               -Atile:skewp,-Ainline:cs=700 -xarch=amd64 -Qoption ube_ipa -inl_alt
               -xpagesize_stack=2m
172.mgrid:    -fast -stackvar -xpad=common:900 -xipo=2 -xarch=amd64 -xprefetch_level=3 -xvector
               -xpagesize=2m -Qoption ld -M,/usr/lib/ld/map.bssalign
173.applu:    -fast -stackvar -xO4 -xipo=2 -xprefetch_level=3 -xarch=amd64
               -qoption iropt -Rloop_dist -xpagesize_heap=2m
177.mesa:    -fast -xO4 -xipo=2 -Wd,-iropt-prof -xarch=amd64 -xalias_level=strong -xpagesize=2m +FDO
178.galgel:   -fast -xipo=2 -xpagesize_heap=2m -xprefetch_level=3 -xvector=simd -xarch=amd64
               RM_SOURCES=lapak.f90
               EXTRALIBS=-xlic_lib=sunperf
179.art:      basepeak=yes
183.earthquake: -fast -xipo=2 -xprefetch -xalias_level=strong -xpagesize=2m -lmopt -lm +FDO
187.facerec:  -fast -xO4 -xipo=2 -xprefetch_level=3 -xpagesize=2m
               RM_SOURCES=cfft.f90 cffti.f90 cfftf.f90
               EXTRALIBS=-xlic_lib=sunperf
188.ammp:    -fast -xO4 -xipo=2 -xarch=amd64 -xalias_level=std -xpagesize_heap=2m -lmopt -lm
189.lucas:    basepeak=yes
191.fma3d:   -fast -fsimple=1 -xipo=2 -xprefetch_level=3 -xarch=amd64 -xpagesize_heap=2m +FDO
200.sixtrack: -fast -xipo=2 -O -xprefetch_level=3 -xarch=amd64 -xpagesize_heap=2m
               -Qoption ld -M,/usr/lib/ld/map.bssalign +FDO
301.apsi:    -fast -xO4 -xipo=2 -xprefetch_level=3 -xarch=amd64 -xpagesize=2m

```

Portability:

178.galgel: -e -fixed -DSPEC_CPU2000_LP64

Shell Environments:

Stack size set to unlimited via "ulimit -s unlimited"

Kernel Parameters (/etc/system):

autoup=900
tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind

Default BIOS setting was used