




CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4200

SPECfp_rate2000 = 27.2
SPECfp_rate_base2000 = 24.7

SPEC license #: 6 Tested by: Sun Microsystems, Santa Clara Test date: Aug-2005 Hardware Avail: Oct-2005 Software Avail: Nov-2005

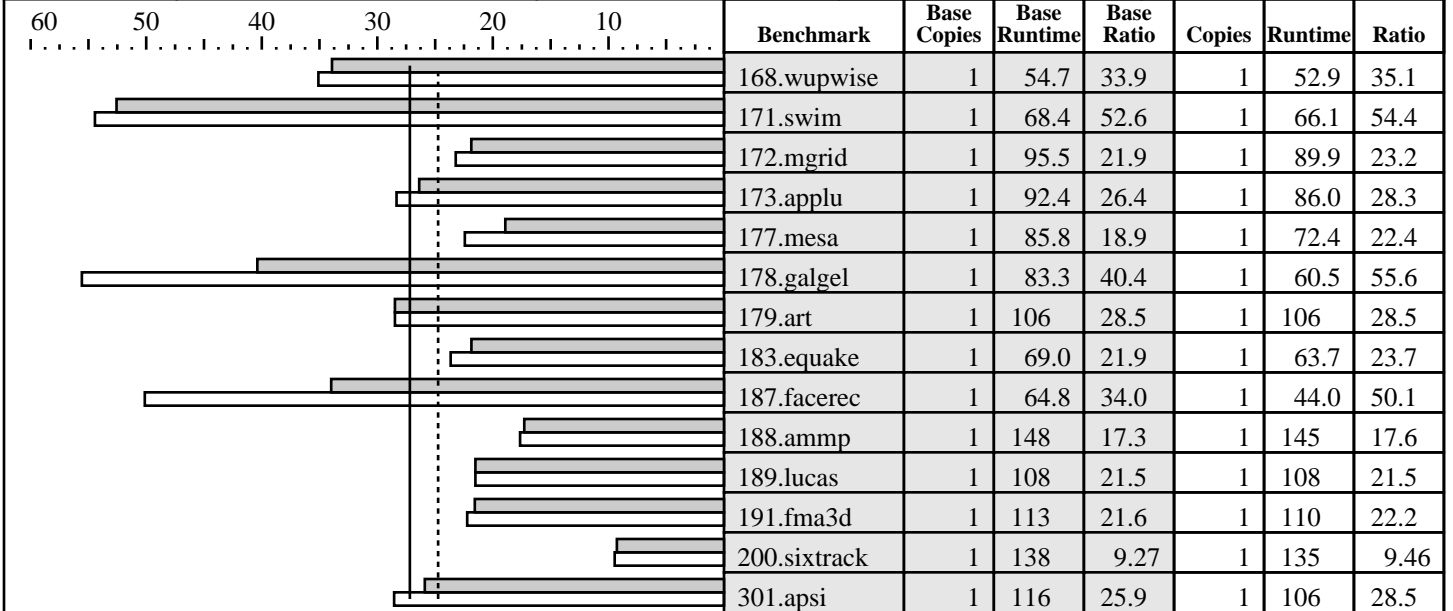

Hardware

CPU: AMD Opteron (TM) 254
CPU MHz: 2800
FPU: Integrated
CPU(s) enabled: 1 core, 1 chip, 1 core/chip
CPU(s) orderable: 1,2 (order by # of chips)
Parallel: No
Primary Cache: 64KBI + 64KBD (on chip) per core
Secondary Cache: 1024KB (I+D) (on chip) per core
L3 Cache: N/A
Other Cache: N/A
Memory: 8GB (4x2GB, PC3200 CL3 DDR SDRAM ECC Registered)
Disk Subsystem: SAS, 36GB, 10K RPM
Other Hardware: None

Software

Operating System: Solaris 10 3/05 HW1
Compiler: Sun Studio 11
File System: ufs
System State: Multi-user

Notes/Tuning Information

Compiler invocation:

C: cc
F90: f90
F77: f90

FDO: PASS1= -xprofile=collect:./feedback PASS2= -xprofile=use:./feedback
fdo_pre0: rm -rf ./feedback.profile

Floating point base flags:

F90: -fast -xipo=2 -xarch=amd64 -xprefetch_level=3 ONESTEP=yes
C: -fast -xcrossfile -xalias_level=std -xpagesize=2m ONESTEP=yes

Floating point peak flags:

ONESTEP=yes for all benchmarks

168.wupwise: -fast -xpad=common:3969 -xipo=2 -xarch=amd64 -xprefetch_level=3 -xpagesize_heap=2m



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4200

SPECfp_rate2000 = 27.2

SPECfp_rate_base2000 = 24.7

SPEC license #: 6 Tested by: Sun Microsystems, Santa Clara Test date: Aug-2005 Hardware Avail: Oct-2005 Software Avail: Nov-2005

Notes/Tuning Information (Continued)

```

171.swim:      -fast -xpad=common:3969 -xipo=2 -xvector=simd -xprefetch_level=3 -Qoption iropt
               -Atile:skewp,-Ainline:cs=700 -xarch=amd64 -Qoption ube_ipa -inl_alt
               -xpagesize_stack=2m
172.mgrid:    -fast -stackvar -xpad=common:900 -xipo=2 -xarch=amd64 -xprefetch_level=3 -xvector
               -xpagesize=2m -Qoption ld -M,/usr/lib/ld/map.bssalign
173.applu:    -fast -stackvar -xO4 -xipo=2 -xprefetch_level=3 -xarch=amd64
               -qoption iropt -Rloop_dist -xpagesize_heap=2m
177.mesa:     -fast -xO4 -xipo=2 -Wd,-iropt-prof -xarch=amd64 -xalias_level=strong -xpagesize=2m +FDO
178.galgel:   -fast -xipo=2 -xpagesize_heap=2m -xprefetch_level=3 -xvector=simd -xarch=amd64
               RM_SOURCES=lapak.f90
               EXTRALIBS=-xlic_lib=sunperf
179.art:      basepeak=yes
183.earthquake: -fast -xipo=2 -xprefetch -xalias_level=strong -xpagesize=2m -lmopt -lm +FDO
187.facerec:  -fast -xO4 -xipo=2 -xprefetch_level=3 -xpagesize=2m
               RM_SOURCES=cfft.f90 cfft.f90 cfft.f90
               EXTRALIBS=-xlic_lib=sunperf
188.ammp:     -fast -xO4 -xipo=2 -xarch=amd64 -xalias_level=std -xpagesize_heap=2m -lmopt -lm
189.lucas:    basepeak=yes
191.fma3d:    -fast -fsimple=1 -xipo=2 -xprefetch_level=3 -xarch=amd64 -xpagesize_heap=2m +FDO
200.sixtrack: -fast -xipo=2 -O -xprefetch_level=3 -xarch=amd64 -xpagesize_heap=2m
               -Qoption ld -M,/usr/lib/ld/map.bssalign +FDO
301.apsi:     -fast -xO4 -xipo=2 -xprefetch_level=3 -xarch=amd64 -xpagesize=2m

```

Portability:

178.galgel: -e -fixed -DSPEC_CPU2000_LP64

Shell Environments:

Stack size set to unlimited via "ulimit -s unlimited"

Kernel Parameters (/etc/system):

autoup=900
tune_t_fsflushr=1

Processes were bound to CPU using submit=pbind

Default BIOS setting was used ; Only one CPU was present on the system

This result was measured on Sun Fire X4100;
Sun Fire X4100 and Sun Fire X4200 are electronically equivalent.