




CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant DL145 G2 (AMD Opteron (TM) 280)

SPECfp_rate2000 = 20.8
SPECfp_rate_base2000 = 19.0

SPEC license #: 3 Tested by: Hewlett-Packard Company Test date: Dec-2005 Hardware Avail: Sep-2005 Software Avail: Nov-2005

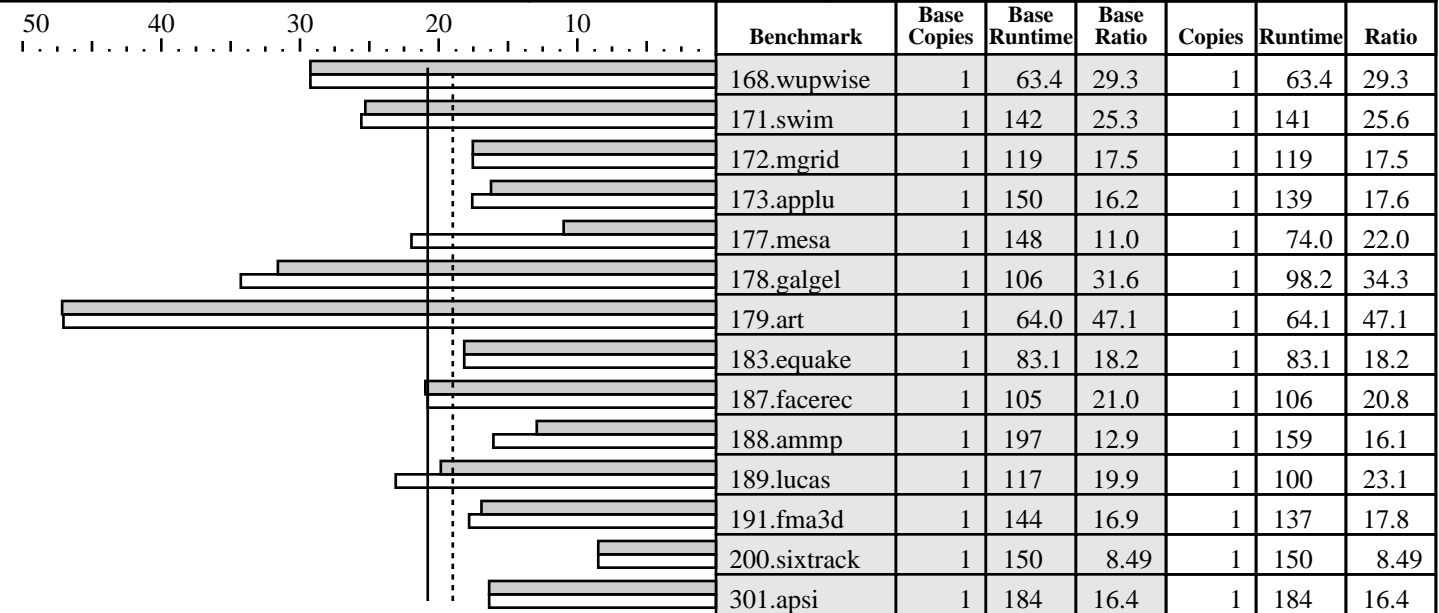

Hardware

CPU: AMD Opteron (TM) 280
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 1 core, 1 chip, 2 cores/chip
 CPU(s) orderable: 1,2
 Parallel: No
 Primary Cache: 64KBI + 64KBD (on chip) per core
 Secondary Cache: 1024KB(I+D) (on chip) per core
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 4x2048MB PC3200 CL3.0
 Disk Subsystem: 1x36.4GB 15K Ultra320 SCSI
 Other Hardware:

Software

Operating System: Windows Server 2003 Enterprise SP1
 Compiler: Intel C++ Compiler for 32-bit applications, (version 8.1 Build 20050524Z)
 Intel Fortran Compiler for 32-bit applications, (version 8.1 build 20050517Z)
 PGI Fortran compiler 6.0-4 for Windows XP (32-bit)
 PGI C compiler 6.0-4 for Windows XP (32-bit)
 Microsoft Visual Studio .NET 7.0.9466 (for libraries)
 AMD Core Math Library V2.6.0
 File System: NTFS
 System State: Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen PASS2=-Qprof_use (Intel compiler)
+FDO*: PASS1=-Mpfi PASS2=-Mpfo (PGI compiler)
+ACML is linking with AMD Core Math Library V2.6.0
ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
pgf90 is the PGI Fortran compiler, pgcc is the PGI C compiler.
Base tuning for C programs:      pgcc -fastsse -Mipa=fast,inline
Base tuning for FORTRAN programs: pgf90 -fastsse -Mipa=fast,inline +FDO* ONESTEP=1
Portability flags:
  178.galgel: -Mfixed
Peak tuning:
168.wupwise:  pgf90 basepeak=yes
171.swim:     ifort -Qipo -O3 -QaxN -QxW +FDO -Qunroll0 ONESTEP=1
172.mgrid:   pgf90 basepeak=yes
173.applu:   ifort -Qipo -O3 -QaxN -QxW +FDO -auto ONESTEP=1
177.mesa:    icl -Qipo -arch:SSE2 +FDO -Qunroll1 -Qansi_alias ONESTEP=1
              -Qoption,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
178.galgel:  pgf90 -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90 -Munix +ACML ONESTEP=1
```



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant DL145 G2 (AMD Opteron (TM) 280)

SPECfp_rate2000 = 20.8
SPECfp_rate_base2000 = 19.0

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Dec-2005 | Hardware Avail: Sep-2005 | Software Avail: Nov-2005

Notes/Tuning Information (Continued)

```
179.art:      pgcc -fastsse -Mipa=fast,inline
183.quake:    icl  basepeak=yes
187.facerec:  ifort -Qipo -QxW +FDO -Qunroll3 ONESTEP=1
              -Qoption,f,-ip_ninl_max_stats=2500,-ip_ninl_max_total_stats=7000
188.ammp:     icl  -Oa -arch:SSE2 -Zp4 -Qansi_alias ONESTEP=1
189.lucas:    ifort -Qipo -QxW -Qunroll1 ONESTEP=1
191.fma3d:    ifort -Qipo -QaxN -QxW +FDO -Qansi_alias- ONESTEP=1
200.sixtrack: pgf90 basepeak=yes
301.apsi:     pgf90 basepeak=yes
```

BIOS Configuration Notes

Node Interleaving is Disabled

Other Configuration Notes

/NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.

Submitted_by: "Schmidt, David (Performance Eng.)" <D.Schmidt@hp.com>

Submitted: Mon Dec 12 19:17:10 2005

Submission: cpu2000-20051212-05251.sub