



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation


Advanced Micro Devices

TYAN Thunder K8SD Pro (S2882-D), AMD Opteron(TM) 285

SPECfp_rate2000 = 68.7

SPECfp_rate_base2000 = 62.9

SPEC license #: 49 | Tested by: AMD Austin, Texas | Test date: Feb-2006 | Hardware Avail: Mar-2006 | Software Avail: Oct-2006

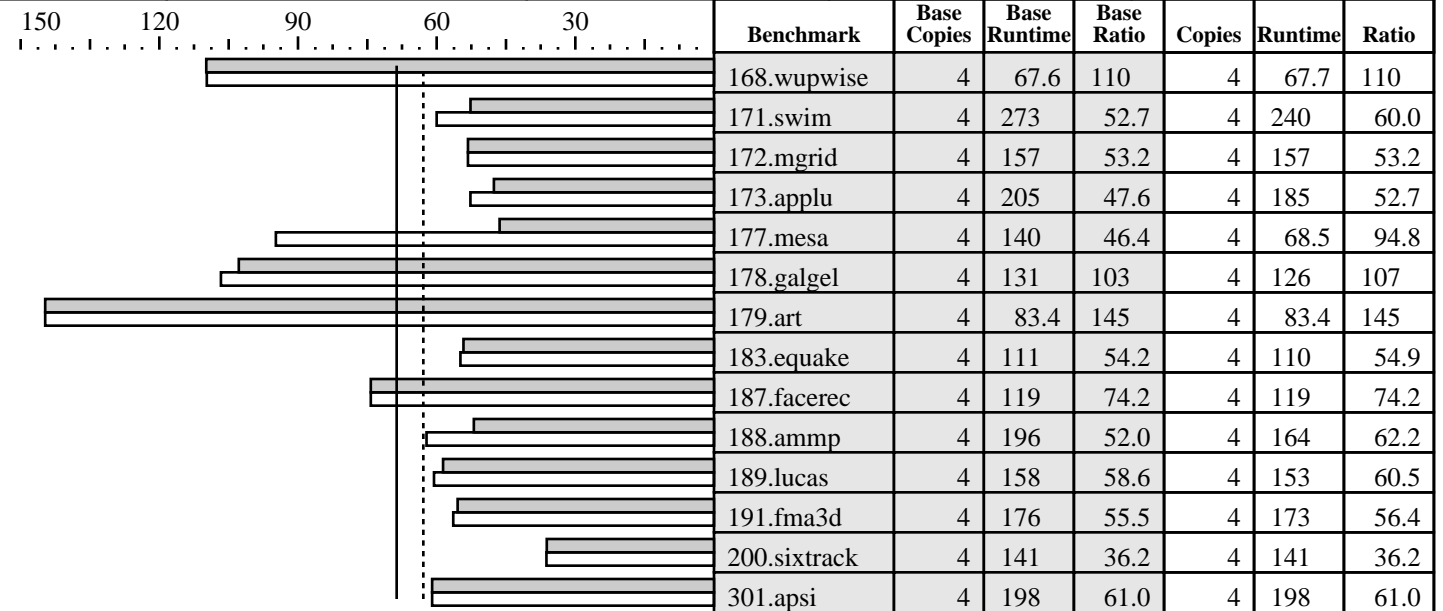

Hardware

CPU: AMD Opteron(TM) 285
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2
 Parallel: no
 Primary Cache: 64KBI + 64KBD (on chip) per core
 Secondary Cache: 1024KB (I+D) (on chip) per core
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 4x512MB, DDR400 CL2 ECC Reg
 Disk Subsystem: SATA, 250 GB
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise edition SP1 (32-bit)
 Compiler: Intel C++ 9.0 build 20050912Z for IA32, Intel Fortran 9.0 build 20050912Z for IA32, Microsoft Visual Studio .NET 7.0.9466 (libraries) PGI Fortran compiler 6.0-5 for Windows XP, PGI C compiler 6.0-5 for Windows XP, ACML Version 2.5.3 (bundled with PGI 6.0-5)
 File System: NTFS
 System State: default

Notes/Tuning Information

+FDO:
 icl, ifort : PASS1=-Qprof_gen PASS2=-Qprof_use
 pgf90 : PASS1=-Mpfi PASS2=-Mpfo
 ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and pgf90 is the PGI Fortran 90 compiler.
 pgcc is the PGI C compiler.
 ONESTEP is set to 1 for every compile with the PGI compilers.
 Portability:
 178.galgel: -Mfixed
 Baseline: C : pgcc -fastsse -Mipa=fast,inline
 Baseline: Fortran: pgf90 -fastsse -Mipa=fast,inline +FDO
 Peak tuning:
 168.wupwise: pgf90 -fastsse -Mipa=fast,inline -Mvect
 171.swim: ifort -Qipo -O3 -QaxN -QxW -Qunroll0 +FDO
 172.mgrid: pgf90 -fastsse -Mipa=fast,inline
 173.applu: ifort -Qipo -O3 -QaxN -QxW -auto +FDO
 177.mesa: icl -Qipo -QxW -Qunroll1 -Qansi_alias +FDO



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

TYAN Thunder K8SD Pro (S2882-D), AMD Opteron(TM) 285

SPECfp_rate2000 = 68.7

SPECfp_rate_base2000 = 62.9

SPEC license #: 49 | Tested by: AMD Austin, Texas | Test date: Feb-2006 | Hardware Avail: Mar-2006 | Software Avail: Oct-2006

Notes/Tuning Information (Continued)

```

-Option,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
178.galgel:          pgf90  -fastsse -Mipa=fast,safe -Munix -lacml
                    RM_SOURCES=lapak.f90
179.art:             pgcc    basepeak=yes
183.equake:          icl     -O3 -Qipo -QxW +FDO
187.facerec:         pgf90  basepeak=1
188.amp:             icl     -Oa  -QxW  -Zp4 -Qansi_alias
189.lucas:           ifort   -Qipo -QxW -Qunroll1
191.fma3d:           pgf90  -Mipa=fast,inline -fastsse -Mnovect +FDO
200.sixtrack:        pgf90  -fastsse -Mipa=fast,inline
301.apsi:            pgf90  -fastsse -Mipa=fast,inline

```

Corsair CMX512RE-3200LL (XMS3200REV2.1) memory used in Dual Channel configuration. CMOS cleared, default BIOS settings used.

BIOS rev 3.05

The tested system can be assembled using a standard ATX case and an Antec True 550 watt EPS12V Power Supply.