




CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices
Tyan Thunder K9HM (S3992), AMD Opteron (TM) 2218

SPECfp_rate2000 = **79.1**
SPECfp_rate_base2000 = **73.9**

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Jul-2006 | Hardware Avail: Sep-2006 | Software Avail: Oct-2005

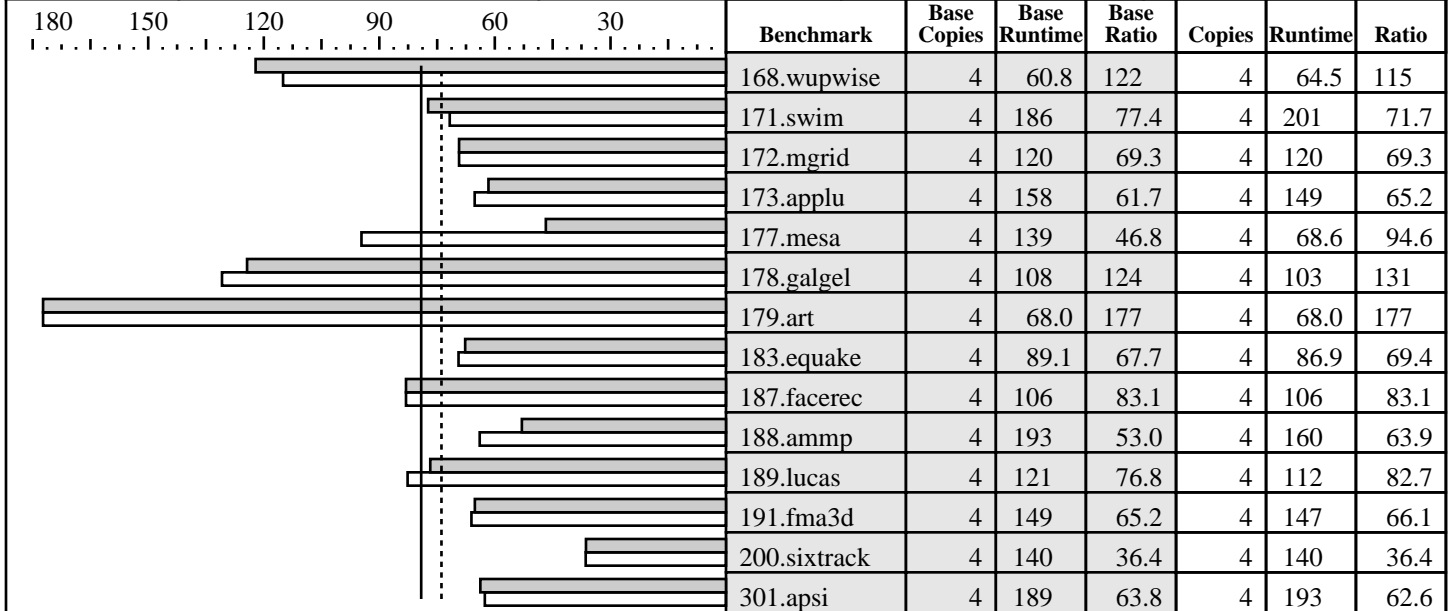

Hardware

CPU: AMD Opteron (TM) 2218
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2
 Parallel: no
 Primary Cache: 64KBI + 64KBD on chip per core
 Secondary Cache: 1024KB (I+D) on chip per core
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 8x512MB, DDR2-667 CL4 ECC Reg
 Disk Subsystem: IDE, 120 GB
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise Edition SP1 (32-bit)
 Compiler: Intel C++ 9.0 build 20050912Z for IA32, Intel Fortran 9.0 build 20050912Z for IA32, Microsoft Visual Studio .NET 7.0.9466 (libraries) PGI Fortran compiler 6.0-5 for Windows XP, PGI C compiler 6.0-5 for Windows XP, ACML Version 2.5.3 (bundled with PGI 6.0-5)
 File System: NTFS
 System State: default

Notes/Tuning Information

+FDO:
 icl, ifort : PASS1=-Qprof_gen PASS2=-Qprof_use
 pgf90 : PASS1=-Mpfi PASS2=-Mpfo
 ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and pgf90 is the PGI Fortran 90 compiler.
 pgcc is the PGI C compiler.
 ONESTEP is set to 1 for every compile with the PGI compilers.
 Portability:
 178.galgel: -Mfixed
 Baseline: C : pgcc -fastsse -Mipa=fast,inline
 Baseline: Fortran: pgf90 -fastsse -Mipa=fast,inline +FDO
 Peak tuning:
 168.wupwise: pgf90 -fastsse -Mipa=fast,inline -Mvect
 171.swim: ifort -Qipo -O3 -QaxN -QxW -Qunroll0 +FDO
 172.mgrid: pgf90 -fastsse -Mipa=fast,inline
 173.applu: ifort -Qipo -O3 -QaxN -QxW -auto +FDO
 177.mesa: icl -Qipo -QxW -Qunroll1 -Qansi_alias +FDO



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices
Tyan Thunder K9HM (S3992), AMD Opteron (TM) 2218

SPECfp_rate2000 = 79.1
SPECfp_rate_base2000 = 73.9

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Jul-2006 | Hardware Avail: Sep-2006 | Software Avail: Oct-2005

Notes/Tuning Information (Continued)

-Qoption,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500

178.galgel: pgf90 -fastsse -Mipa=fast,safe -Munix -lacml
RM_SOURCES=lapak.f90

179.art: pgcc basepeak=yes

183.quake: icl -O3 -Qipo -QxW +FDO

187.facerec: pgf90 basepeak=1

188.ampp: icl -Oa -QxW -Zp4 -Qansi_alias

189.lucas: ifort -Qipo -QxW -Qunroll1

191.fma3d: pgf90 -Mipa=fast,inline -fastsse -Mnovect +FDO

200.sixtrack: pgf90 -fastsse -Mipa=fast,inline

301.apsi: pgf90 -fastsse -Mipa=fast,inline

system can be built using a standard ATX case and a Zippy 700W PSL-6701P power supply
Half memory slots populated on all CPUs in dual channel configuration
'start /b /wait /affinity' command is used to bind CPU(s) to processes