



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

Dell Precision 380 (3.8 GHz, Pentium 4 processor 670)

SPECfp<sup>®</sup>2006 = --

SPECfp\_base2006 = 12.2

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2006

Hardware Availability: Jun-2005

Software Availability: May-2006

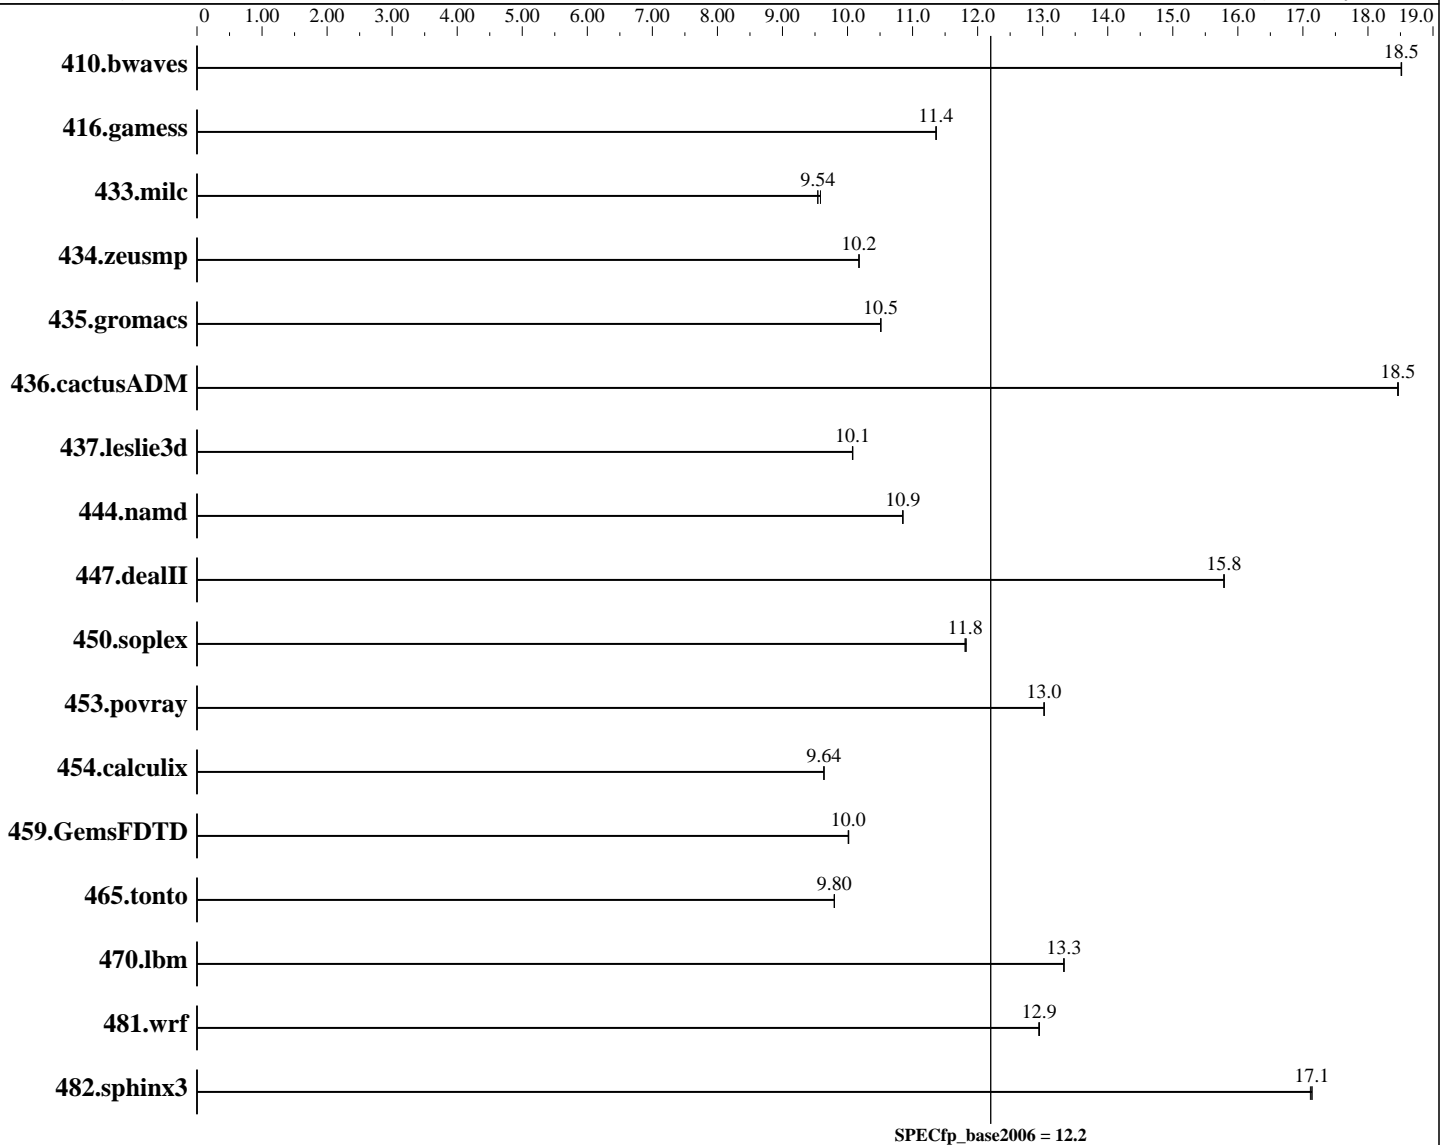

### Hardware

CPU Name: Intel Pentium 4 670  
 CPU Characteristics:  
 CPU MHz: 3800  
 FPU: Integrated  
 CPU(s) enabled: 1 core, 1 chip, 1 core/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per chip  
 Secondary Cache: 2 MB I+D on chip per chip

Continued on next page

### Software

Operating System: Windows XP Professional x64 Edition  
 Compiler: Intel C++ Compiler 9.1 for IA32 (20060323Z)  
 Intel FORTRAN Compiler 9.1 for IA32 (20060323Z)  
 Microsoft Visual Studio .NET 2003  
 MicroQuill SmartHeap Library 7.4  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

Dell Precision 380 (3.8 GHz, Pentium 4 processor 670)

SPECfp2006 = --

SPECfp\_base2006 = 12.2

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2006

Hardware Availability: Jun-2005

Software Availability: May-2006

L3 Cache: None  
Other Cache: None  
Memory: 2 GB (4x512 MB 533MHz CL4 DDR2 SDRAM)  
Disk Subsystem: 1 x 80GB SATA 7200 RPM  
Other Hardware: None

Peak Pointers: Not Applicable  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	734	18.5	<b><u>734</u></b>	<b><u>18.5</u></b>	734	18.5						
416.gamess	1724	11.4	1723	11.4	<b><u>1724</u></b>	<b><u>11.4</u></b>						
433.milc	<b><u>962</u></b>	<b><u>9.54</u></b>	958	9.58	962	9.54						
434.zeusmp	894	10.2	<b><u>894</u></b>	<b><u>10.2</u></b>	894	10.2						
435.gromacs	<b><u>679</u></b>	<b><u>10.5</u></b>	679	10.5	679	10.5						
436.cactusADM	<b><u>647</u></b>	<b><u>18.5</u></b>	647	18.5	647	18.5						
437.leslie3d	932	10.1	<b><u>933</u></b>	<b><u>10.1</u></b>	933	10.1						
444.namd	739	10.9	<b><u>739</u></b>	<b><u>10.9</u></b>	739	10.8						
447.dealII	725	15.8	724	15.8	<b><u>725</u></b>	<b><u>15.8</u></b>						
450.soplex	705	11.8	<b><u>706</u></b>	<b><u>11.8</u></b>	706	11.8						
453.povray	<b><u>409</u></b>	<b><u>13.0</u></b>	409	13.0	409	13.0						
454.calculix	856	9.64	<b><u>856</u></b>	<b><u>9.64</u></b>	856	9.64						
459.GemsFDTD	1059	10.0	1060	10.0	<b><u>1060</u></b>	<b><u>10.0</u></b>						
465.tonto	1004	9.80	<b><u>1004</u></b>	<b><u>9.80</u></b>	1005	9.80						
470.lbm	1031	13.3	1031	13.3	<b><u>1031</u></b>	<b><u>13.3</u></b>						
481.wrf	<b><u>863</u></b>	<b><u>12.9</u></b>	863	12.9	863	12.9						
482.sphinx3	<b><u>1137</u></b>	<b><u>17.1</u></b>	1139	17.1	1137	17.1						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc7.1 -Qc99 ifort
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

Dell Precision 380 (3.8 GHz, Pentium 4 processor 670)

**SPECfp2006 =** --

**SPECfp\_base2006 =** 12.2

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Apr-2006

**Hardware Availability:** Jun-2005

**Software Availability:** May-2006

## Base Portability Flags

```

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.deallI: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
           -DBOOST_NO_INTRINSIC_WCHAR_T
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

```

## Base Optimization Flags

```

C benchmarks:
  -fast /F950000000 shlw32m.lib          -link /FORCE:MULTIPLE

C++ benchmarks:
  -fast -Qcxx_features /F950000000 shlw32m.lib
  -link /FORCE:MULTIPLE

Fortran benchmarks:
  -fast /F950000000          -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:
  -fast /F950000000          -link /FORCE:MULTIPLE

```

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/Intel-ic91-flags.20090715.00.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Intel-ic91-flags.20090715.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v90.  
Report generated on Tue Jul 22 10:02:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 August 2006.