



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp®2006 = 13.2

NovaScale B260 (Intel Xeon processor 5150,2.66GHz)

SPECfp\_base2006 = 12.9

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Dec-2006

Software Availability: Dec-2006

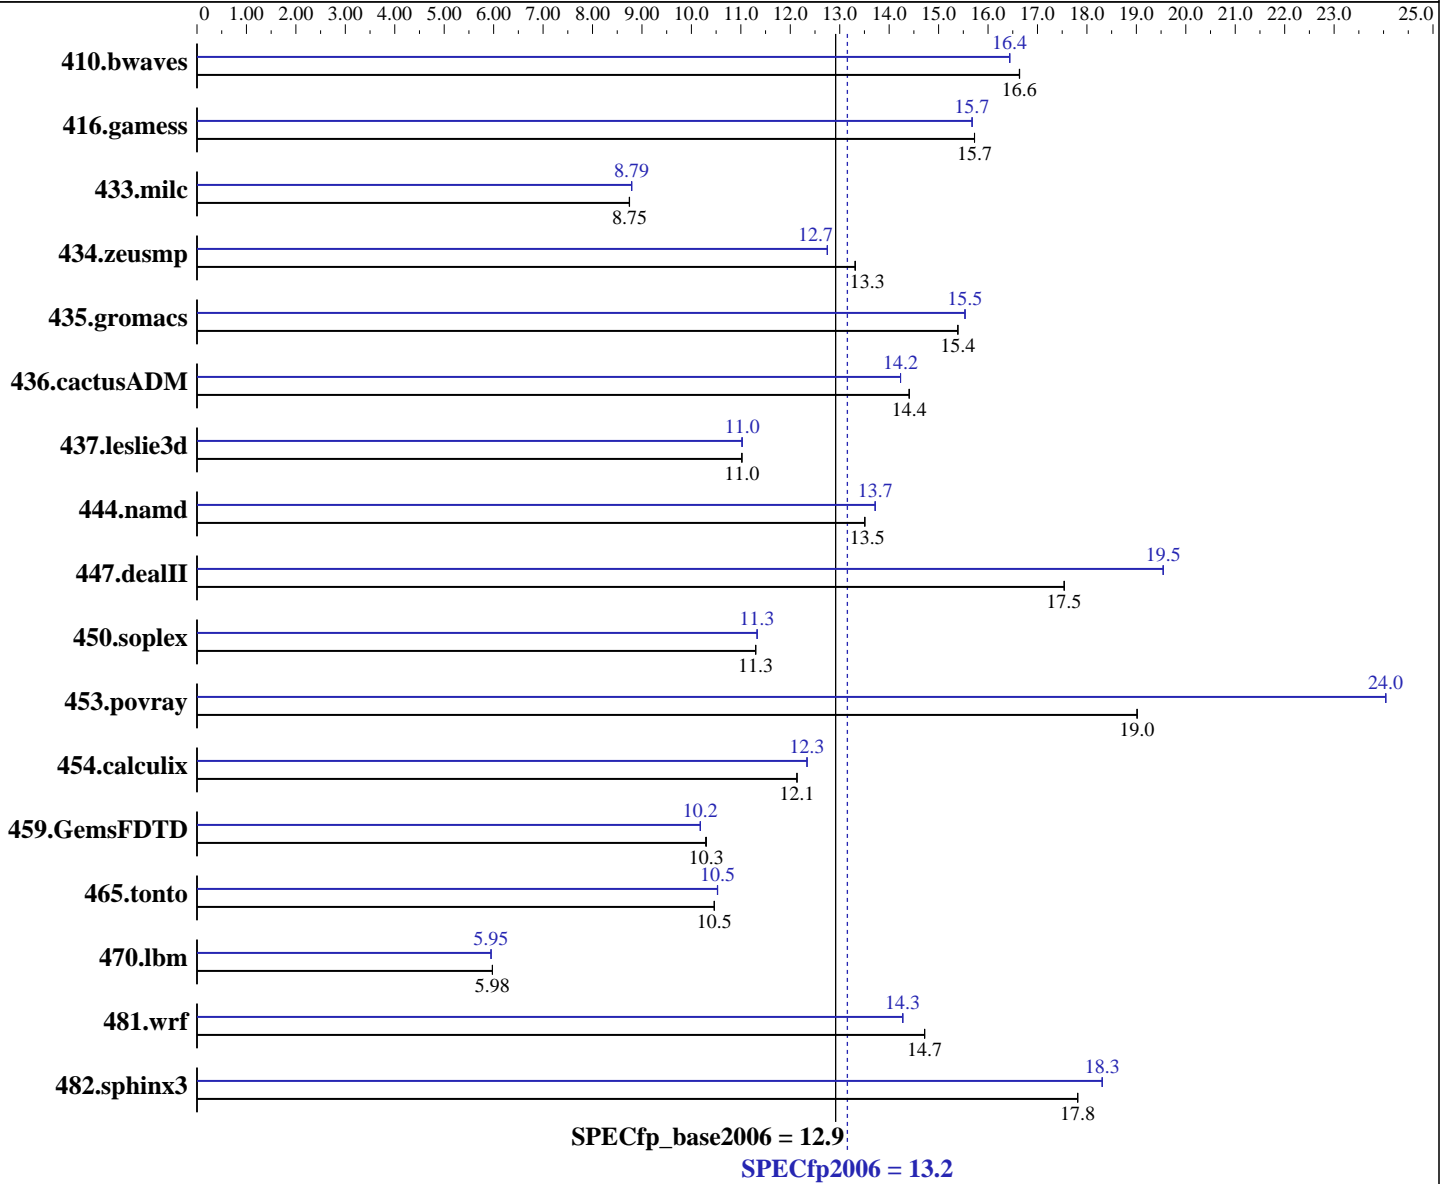

### Hardware

CPU Name: Intel Xeon 5150  
 CPU Characteristics: 2.66 GHz, 4MB L2, 1333MHz bus  
 CPU MHz: 2660  
 FPU: Integrated  
 CPU(s) enabled: 1 core, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 to 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

### Software

Operating System: Windows Server 2003 Enterprise Edition (32 bits) Service Pack1  
 Compiler: Intel C++ Compiler for IA32 version 9.1  
 Package ID W\_CC\_C\_9.1.033 Build no 20061103Z  
 Intel Fortran Compiler for IA32 version 9.1  
 Package ID W\_FC\_C\_9.1.033 Build no 20061103Z  
 Microsoft Visual Studio .NET 2003 (lib & linker)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp2006 = **13.2**

NovaScale B260 (Intel Xeon processor 5150,2.66GHz)

SPECfp\_base2006 = **12.9**

CPU2006 license: 20

Test date: Dec-2006

Test sponsor: Bull SAS

Hardware Availability: Dec-2006

Tested by: Bull SAS

Software Availability: Dec-2006

L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (2GB DIMMx4, FB-DIMM PC2-5300F ECC CL5)  
 Disk Subsystem: 73 GB SAS, 10000RPM  
 Other Hardware: None

Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	817	16.6	817	16.6	<b>817</b>	<b>16.6</b>	<b>827</b>	<b>16.4</b>	827	16.4	827	16.4
416.gamess	1245	15.7	<b>1245</b>	<b>15.7</b>	1245	15.7	1249	15.7	1249	15.7	<b>1249</b>	<b>15.7</b>
433.milc	1050	8.74	<b>1049</b>	<b>8.75</b>	1049	8.75	<b>1044</b>	<b>8.79</b>	1045	8.79	1043	8.80
434.zeusmp	683	13.3	<b>683</b>	<b>13.3</b>	684	13.3	<b>714</b>	<b>12.7</b>	714	12.7	714	12.7
435.gromacs	464	15.4	<b>464</b>	<b>15.4</b>	464	15.4	<b>460</b>	<b>15.5</b>	460	15.5	460	15.5
436.cactusADM	829	14.4	<b>829</b>	<b>14.4</b>	830	14.4	840	14.2	<b>840</b>	<b>14.2</b>	840	14.2
437.leslie3d	<b>853</b>	<b>11.0</b>	853	11.0	853	11.0	853	11.0	852	11.0	<b>852</b>	<b>11.0</b>
444.namd	594	13.5	<b>594</b>	<b>13.5</b>	594	13.5	<b>585</b>	<b>13.7</b>	585	13.7	585	13.7
447.dealII	<b>652</b>	<b>17.5</b>	652	17.5	652	17.5	585	19.5	<b>585</b>	<b>19.5</b>	585	19.5
450.soplex	738	11.3	<b>738</b>	<b>11.3</b>	738	11.3	736	11.3	736	11.3	<b>736</b>	<b>11.3</b>
453.povray	<b>280</b>	<b>19.0</b>	280	19.0	280	19.0	221	24.0	221	24.0	<b>221</b>	<b>24.0</b>
454.calculix	<b>680</b>	<b>12.1</b>	680	12.1	680	12.1	<b>669</b>	<b>12.3</b>	668	12.3	669	12.3
459.GemsFDTD	1031	10.3	1030	10.3	<b>1030</b>	<b>10.3</b>	1042	10.2	1042	10.2	<b>1042</b>	<b>10.2</b>
465.tonto	<b>940</b>	<b>10.5</b>	940	10.5	941	10.5	935	10.5	934	10.5	<b>935</b>	<b>10.5</b>
470.lbm	<b>2299</b>	<b>5.98</b>	2299	5.98	2300	5.97	2310	5.95	<b>2310</b>	<b>5.95</b>	2310	5.95
481.wrf	759	14.7	759	14.7	<b>759</b>	<b>14.7</b>	782	14.3	783	14.3	<b>782</b>	<b>14.3</b>
482.sphinx3	1094	17.8	1094	17.8	<b>1094</b>	<b>17.8</b>	1064	18.3	<b>1064</b>	<b>18.3</b>	1065	18.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Other Configuration Notes

/NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment

## Base Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 13.2**

NovaScale B260 (Intel Xeon processor 5150,2.66GHz)

**SPECfp\_base2006 = 12.9**

**CPU2006 license:** 20

**Test date:** Dec-2006

**Test sponsor:** Bull SAS

**Hardware Availability:** Dec-2006

**Tested by:** Bull SAS

**Software Availability:** Dec-2006

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icl -Qvc7.1 -Qc99 ifort

## Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
-DBOOST\_NO\_INTRINSIC\_WCHAR\_T  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Base Optimization Flags

C benchmarks:  
-fast /F950000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:  
-fast -Qcxx\_features /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:  
-fast /F950000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:  
-fast /F950000000 -link /FORCE:MULTIPLE

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99

C++ benchmarks:  
icl -Qvc7.1

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icl -Qvc7.1 -Qc99 ifort



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 13.2**

NovaScale B260 (Intel Xeon processor 5150,2.66GHz)

**SPECfp\_base2006 = 12.9**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Dec-2006

**Hardware Availability:** Dec-2006

**Software Availability:** Dec-2006

## Peak Portability Flags

```

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
           -DBOOST_NO_INTRINSIC_WCHAR_T
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

```

## Peak Optimization Flags

C benchmarks:

```

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000 shlw32m.lib
-link /FORCE:MULTIPLE

```

C++ benchmarks:

```

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F950000000 shlw32m.lib -link /FORCE:MULTIPLE

```

Fortran benchmarks:

```

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000
-link /FORCE:MULTIPLE

```

Benchmarks using both Fortran and C:

```

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000
-link /FORCE:MULTIPLE

```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 10:16:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 February 2007.