



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260 (Intel Xeon processor E5335,2.00GHz)

SPECfp<sup>®</sup>2006 = 11.1

SPECfp\_base2006 = 10.9

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2007

Hardware Availability: Jan-2007

Software Availability: Dec-2006

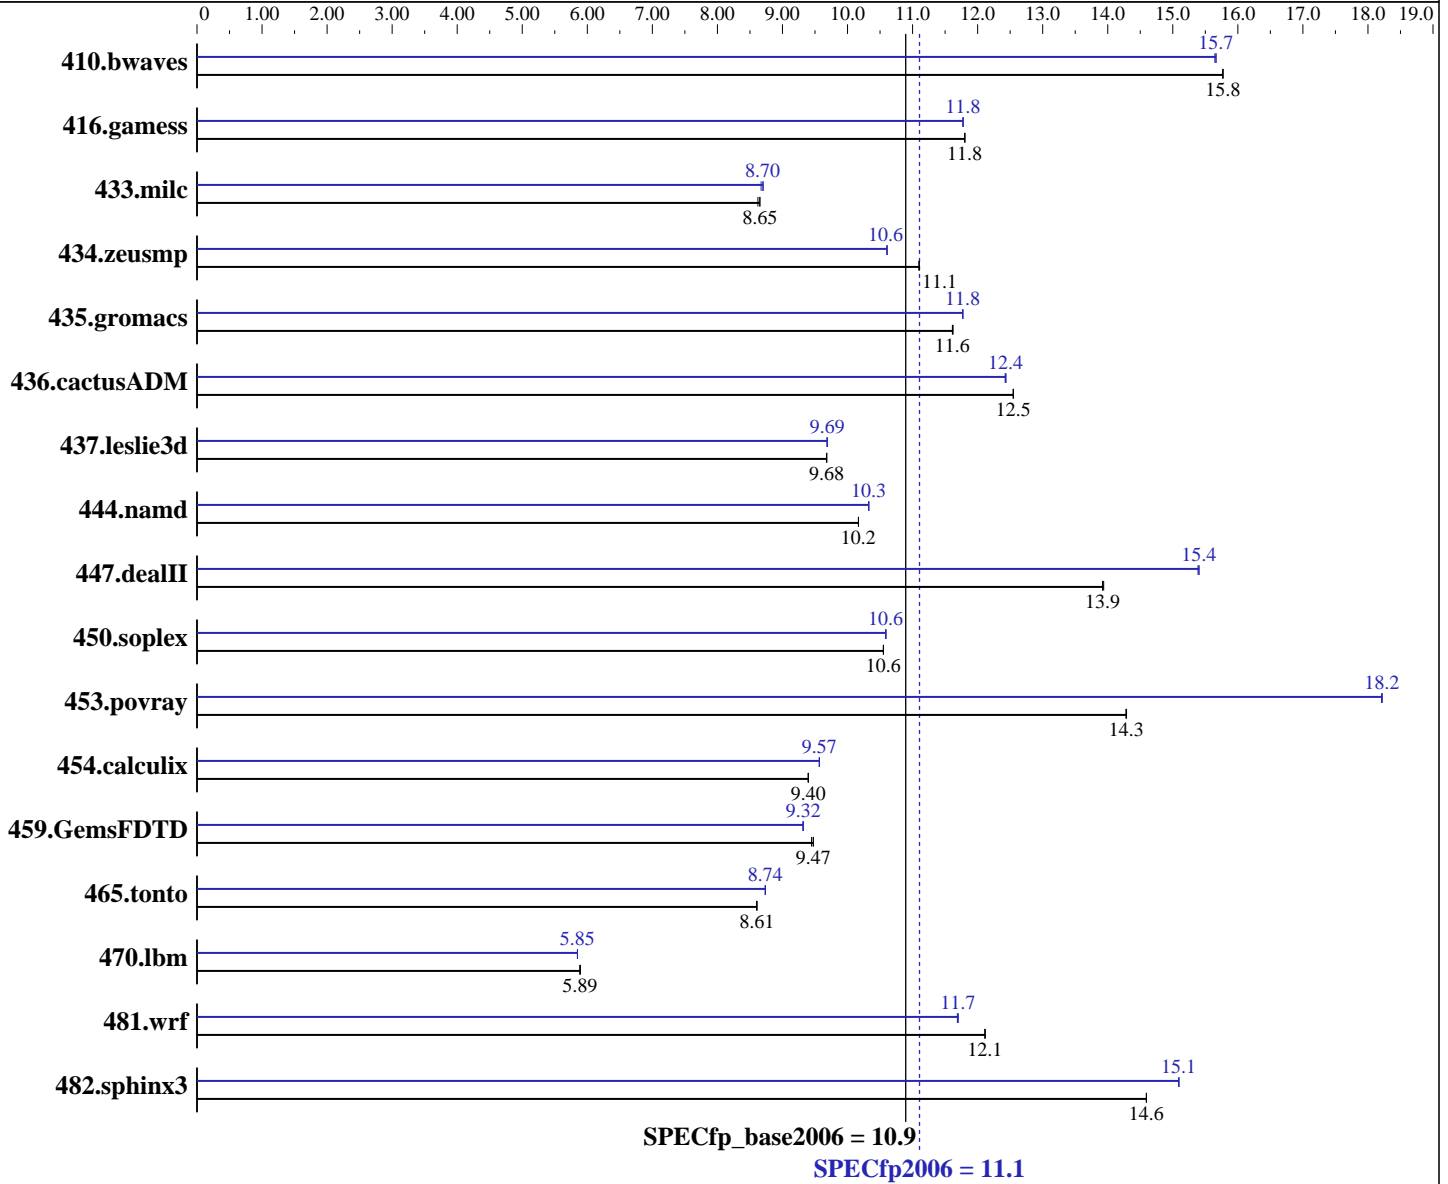

**Hardware**

CPU Name: Intel Xeon E5335  
 CPU Characteristics: 2.00 GHz, 8MB L2, 1333MHz bus  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 1 core, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 to 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

**Software**

Operating System: Windows Server 2003 Enterprise Edition (32 bits) Service Pack1  
 Compiler: Intel C++ Compiler for IA32 version 9.1  
 Package ID W\_CC\_C\_9.1.033 Build no 20061103Z  
 Intel Fortran Compiler for IA32 version 9.1  
 Package ID W\_FC\_C\_9.1.033 Build no 20061103Z  
 Microsoft Visual Studio .NET 2003 (lib & linker)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260 (Intel Xeon processor E5335,2.00GHz)

SPECfp2006 = 11.1

SPECfp\_base2006 = 10.9

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2007

Hardware Availability: Jan-2007

Software Availability: Dec-2006

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (2GB DIMMx4, FB-DIMM PC2-5300F ECC CL5)  
Disk Subsystem: 73 GB SAS, 10000RPM  
Other Hardware: None

Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	862	15.8	862	15.8	<b>862</b>	<b>15.8</b>	868	15.7	<b>868</b>	<b>15.7</b>	869	15.6
416.gamess	1659	11.8	1659	11.8	<b>1659</b>	<b>11.8</b>	1663	11.8	1663	11.8	<b>1663</b>	<b>11.8</b>
433.milc	<b>1061</b>	<b>8.65</b>	1065	8.62	1061	8.65	1059	8.67	1055	8.70	<b>1055</b>	<b>8.70</b>
434.zeusmp	820	11.1	820	11.1	<b>820</b>	<b>11.1</b>	858	10.6	858	10.6	<b>858</b>	<b>10.6</b>
435.gromacs	<b>615</b>	<b>11.6</b>	614	11.6	615	11.6	607	11.8	607	11.8	<b>607</b>	<b>11.8</b>
436.cactusADM	<b>952</b>	<b>12.5</b>	952	12.5	952	12.5	962	12.4	961	12.4	<b>961</b>	<b>12.4</b>
437.leslie3d	971	9.68	971	9.68	<b>971</b>	<b>9.68</b>	970	9.69	<b>970</b>	<b>9.69</b>	970	9.69
444.namd	<b>789</b>	<b>10.2</b>	789	10.2	789	10.2	777	10.3	777	10.3	<b>777</b>	<b>10.3</b>
447.dealII	821	13.9	822	13.9	<b>822</b>	<b>13.9</b>	743	15.4	743	15.4	<b>743</b>	<b>15.4</b>
450.soplex	790	10.6	790	10.6	<b>790</b>	<b>10.6</b>	787	10.6	788	10.6	<b>787</b>	<b>10.6</b>
453.povray	373	14.3	372	14.3	<b>372</b>	<b>14.3</b>	<b>292</b>	<b>18.2</b>	292	18.2	292	18.2
454.calculix	878	9.40	878	9.40	<b>878</b>	<b>9.40</b>	863	9.57	862	9.57	<b>862</b>	<b>9.57</b>
459.GemsFDTD	1123	9.45	1120	9.47	<b>1120</b>	<b>9.47</b>	1139	9.31	1139	9.32	<b>1139</b>	<b>9.32</b>
465.tonto	1143	8.61	1144	8.61	<b>1143</b>	<b>8.61</b>	<b>1126</b>	<b>8.74</b>	1126	8.74	1126	8.74
470.lbm	<b>2334</b>	<b>5.89</b>	2331	5.89	2334	5.89	<b>2349</b>	<b>5.85</b>	2349	5.85	2349	5.85
481.wrf	922	12.1	<b>922</b>	<b>12.1</b>	922	12.1	<b>955</b>	<b>11.7</b>	955	11.7	956	11.7
482.sphinx3	1335	14.6	<b>1335</b>	<b>14.6</b>	1336	14.6	1291	15.1	1291	15.1	<b>1291</b>	<b>15.1</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc7.1 -Qc99 ifort
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260 (Intel Xeon processor E5335,2.00GHz)

SPECfp2006 = 11.1

SPECfp\_base2006 = 10.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Feb-2007  
Hardware Availability: Jan-2007  
Software Availability: Dec-2006

## Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
-DBOOST\_NO\_INTRINSIC\_WCHAR\_T  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Base Optimization Flags

C benchmarks:  
-fast /F950000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:  
-fast -Qcxx\_features /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:  
-fast /F950000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:  
-fast /F950000000 -link /FORCE:MULTIPLE

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99

C++ benchmarks:  
icl -Qvc7.1

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icl -Qvc7.1 -Qc99 ifort

## Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
-DBOOST\_NO\_INTRINSIC\_WCHAR\_T

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260 (Intel Xeon processor E5335,2.00GHz)

SPECfp2006 = 11.1

SPECfp\_base2006 = 10.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Feb-2007  
Hardware Availability: Jan-2007  
Software Availability: Dec-2006

## Peak Portability Flags (Continued)

453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Peak Optimization Flags

### C benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

### C++ benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features  
/F950000000 shlw32m.lib -link /FORCE:MULTIPLE
```

### Fortran benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000  
-link /FORCE:MULTIPLE
```

### Benchmarks using both Fortran and C:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000  
-link /FORCE:MULTIPLE
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 10:43:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 March 2007.