



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810
(2.4 GHz, Intel Xeon processor X3220)

SPECfp®2006 = 15.3

SPECfp_base2006 = 15.1

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2007

Hardware Availability: Feb-2007

Software Availability: Nov-2006

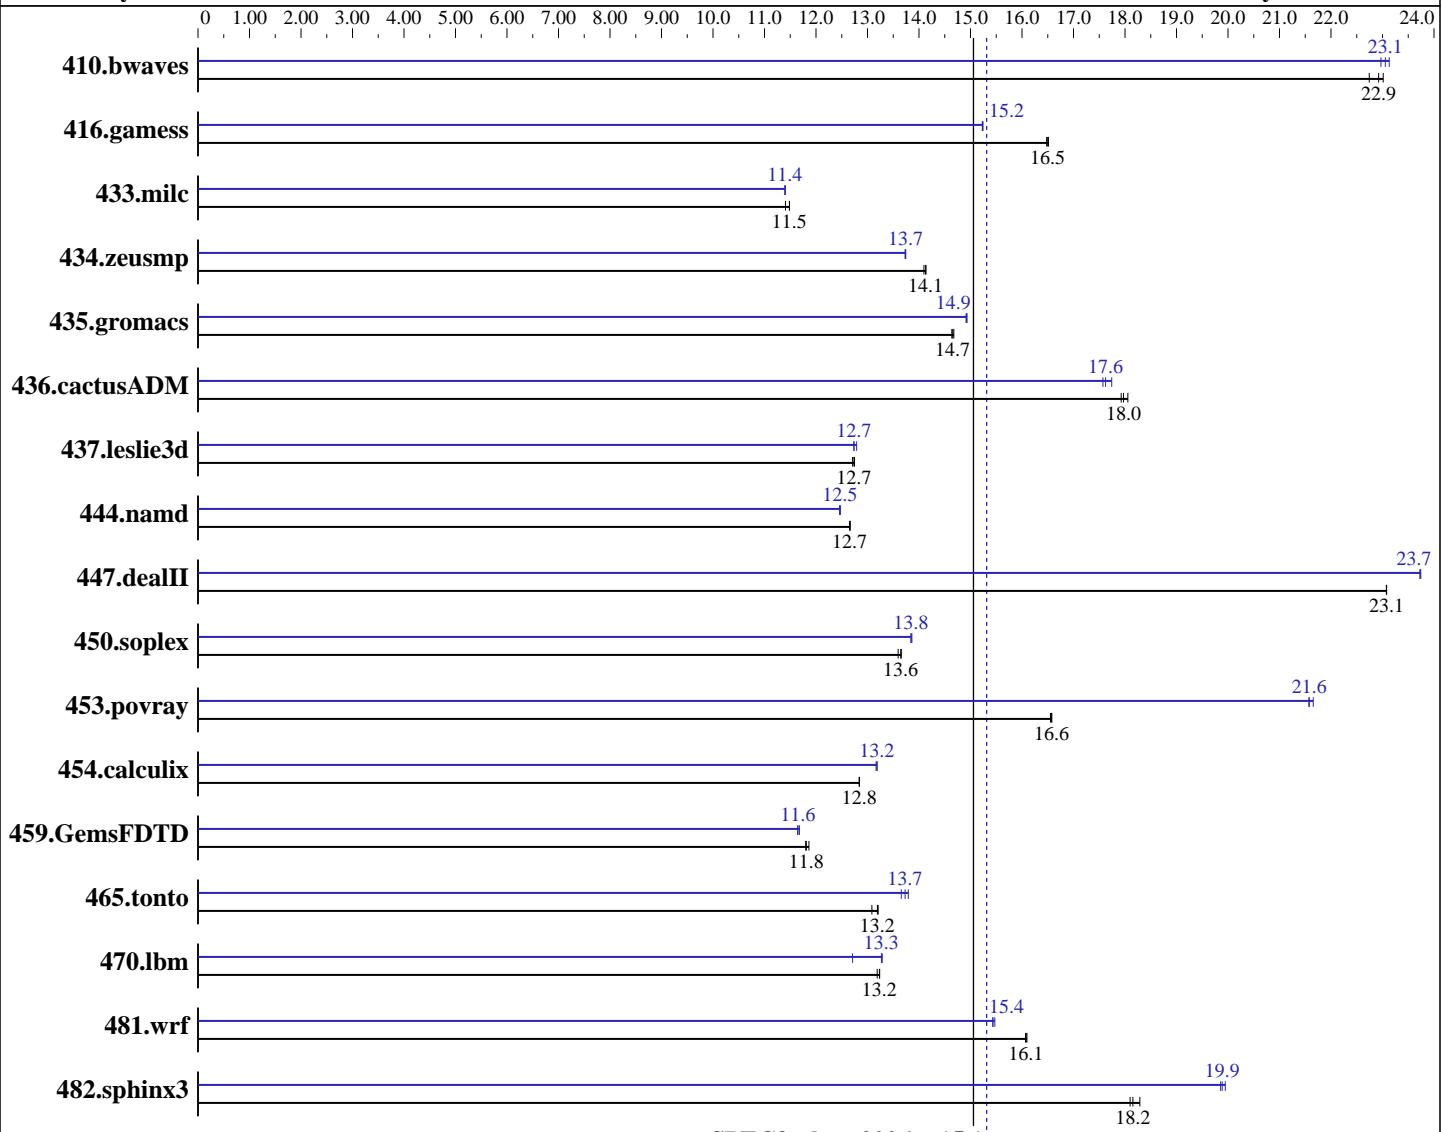

SPECfp_base2006 = 15.1

SPECfp2006 = 15.3

Hardware

CPU Name: Intel Xeon X3220
CPU Characteristics: 2.4GHz, 2x4 MB L2 shared, 1066 MHz system bus
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 1 core, 1 chip, 4 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Software

Operating System: SuSE Linux Enterprise Server 10 (EM64T)
Compiler: Intel C++ Compiler for Intel EM64T-based applications, Version 9.1
Auto Parallel: No

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810
(2.4 GHz, Intel Xeon processor X3220)

SPECfp2006 = 15.3

SPECfp_base2006 = 15.1

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2007

Hardware Availability: Feb-2007

Software Availability: Nov-2006

L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB PC2-5300 CL5)
Disk Subsystem: 2x73 GB 15k SAS
Other Hardware: None

File System: ext2
System State: Multi-user
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	598	22.7	591	23.0	593	22.9	589	23.1	588	23.1	592	23.0
416.gamess	1186	16.5	1187	16.5	1188	16.5	1285	15.2	1285	15.2	1286	15.2
433.milc	805	11.4	799	11.5	799	11.5	805	11.4	805	11.4	805	11.4
434.zeusmp	646	14.1	644	14.1	644	14.1	663	13.7	662	13.7	662	13.7
435.gromacs	487	14.7	488	14.6	486	14.7	478	14.9	478	14.9	479	14.9
436.cactusADM	667	17.9	662	18.1	665	18.0	678	17.6	680	17.6	674	17.7
437.leslie3d	740	12.7	737	12.7	738	12.7	735	12.8	738	12.7	738	12.7
444.namd	634	12.7	634	12.7	633	12.7	643	12.5	643	12.5	644	12.5
447.dealII	496	23.1	496	23.1	496	23.1	482	23.7	482	23.7	482	23.7
450.soplex	613	13.6	611	13.7	611	13.6	602	13.9	602	13.8	602	13.8
453.povray	321	16.6	321	16.6	321	16.6	246	21.7	247	21.6	247	21.6
454.calculix	642	12.8	642	12.8	643	12.8	626	13.2	627	13.2	626	13.2
459.GemsFDTD	894	11.9	899	11.8	898	11.8	908	11.7	911	11.6	911	11.6
465.tonto	752	13.1	745	13.2	746	13.2	713	13.8	717	13.7	721	13.7
470.lbm	1042	13.2	1038	13.2	1038	13.2	1081	12.7	1035	13.3	1034	13.3
481.wrf	694	16.1	695	16.1	695	16.1	724	15.4	722	15.5	724	15.4
482.sphinx3	1066	18.3	1077	18.1	1074	18.2	977	19.9	982	19.9	980	19.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment stack size set to 'unlimited'
System was booted uniprocessor by setting "maxcpus=0"
kernel parameter in menu.lst

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810
(2.4 GHz, Intel Xeon processor X3220)

SPECfp2006 = 15.3

SPECfp_base2006 = 15.1

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2007

Hardware Availability: Feb-2007

Software Availability: Nov-2006

Base Compiler Invocation (Continued)

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-fast`

C++ benchmarks:
`-fast`

Fortran benchmarks:
`-fast`

Benchmarks using both Fortran and C:
`-fast`

Peak Compiler Invocation

C benchmarks:
`icc`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810
(2.4 GHz, Intel Xeon processor X3220)

SPECfp2006 = 15.3

SPECfp_base2006 = 15.1

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2007

Hardware Availability: Feb-2007

Software Availability: Nov-2006

Peak Compiler Invocation (Continued)

C++ benchmarks:

`icpc`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`icc ifort`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32`

C++ benchmarks:

`-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32`

Fortran benchmarks:

`-prof_gen(pass 1) -prof_use(pass 2) -fast`

Benchmarks using both Fortran and C:

`-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32`

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 11:31:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 May 2007.