



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp®2006 = 11.9

Sun SPARC Enterprise M8000

SPECfp_base2006 = 10.6

CPU2006 license: 6


Test date: Mar-2007

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

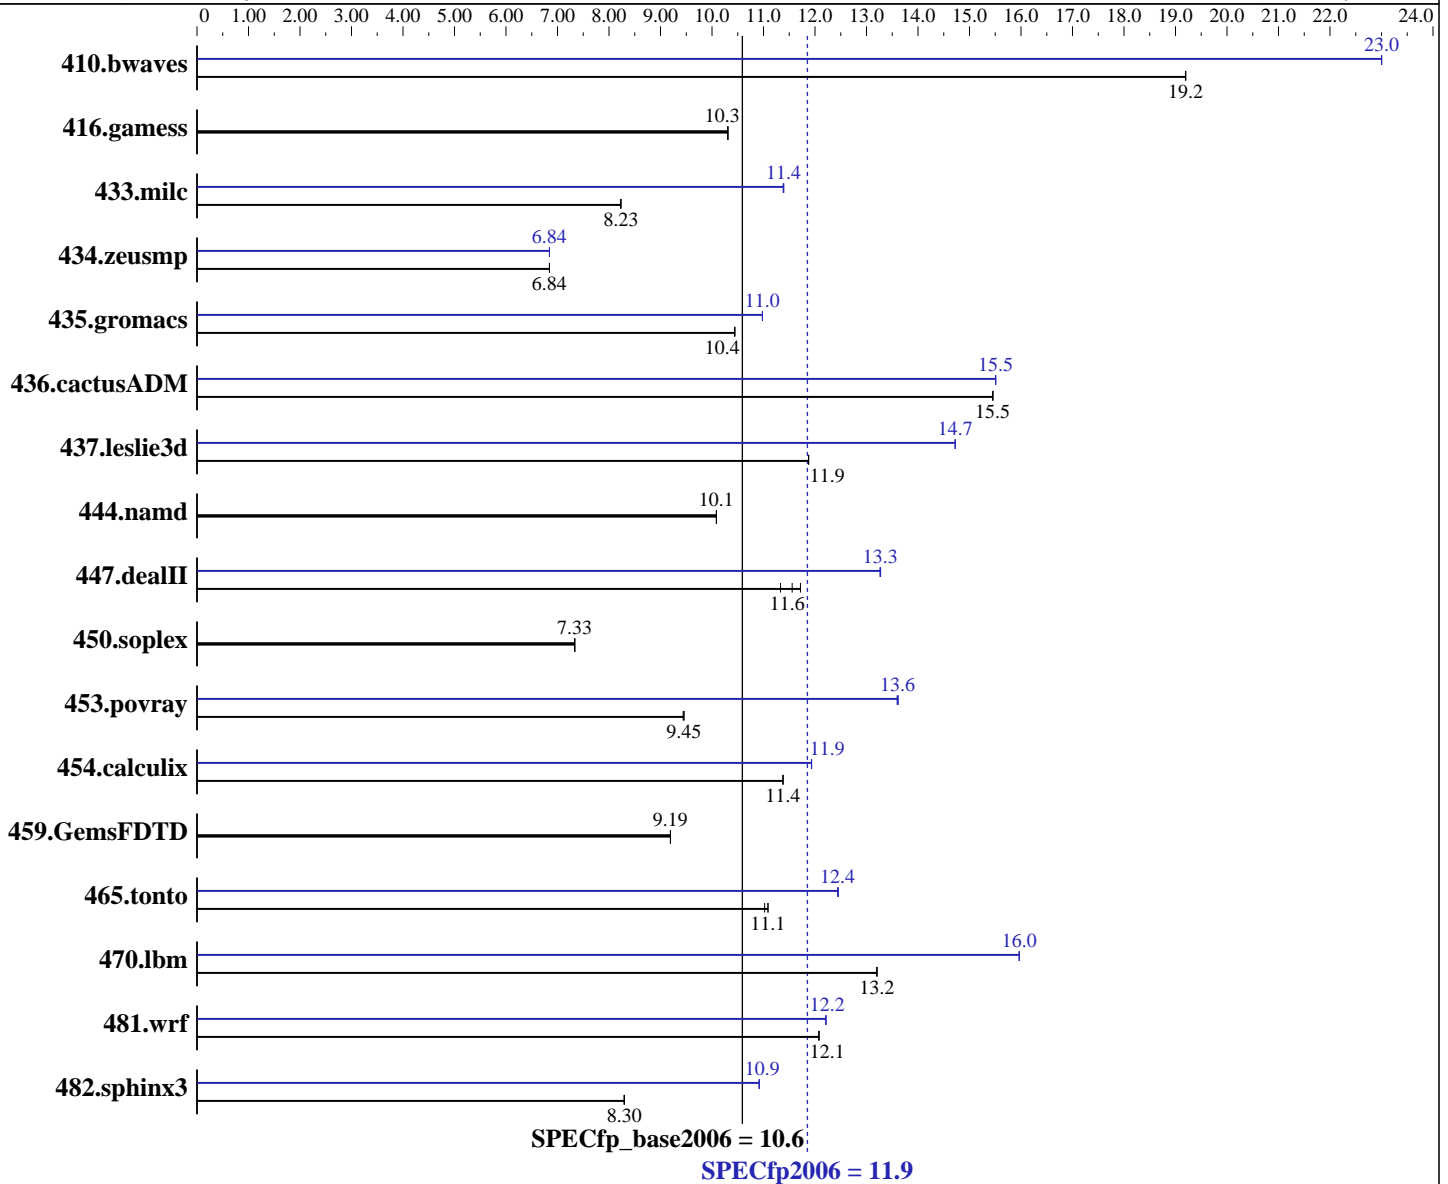

Hardware

CPU Name: SPARC64 VI
 CPU Characteristics:
 CPU MHz: 2280
 FPU: Integrated
 CPU(s) enabled: 32 cores, 16 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 4 CMUs; each CMU contains 2 or 4 chips
 Primary Cache: 128 KB I + 128 KB D on chip per core
 Secondary Cache: 5 MB I+D on chip per chip

Continued on next page

Software

Operating System: Solaris 10 11/06
 Compiler: Sun Studio 12 (Early Access)
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp2006 = **11.9**

Sun SPARC Enterprise M8000

SPECfp_base2006 = **10.6**

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Mar-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

L3 Cache: None
 Other Cache: None
 Memory: 64 GB (64 x 1 GB, see notes for details)
 Disk Subsystem: 73 GB 10,000 RPM Fujitsu MAY2073RC SAS
 Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	708	19.2	708	19.2	708	19.2	<u>591</u>	<u>23.0</u>	591	23.0	591	23.0
416.gamess	1899	10.3	1900	10.3	1899	10.3	1899	10.3	1900	10.3	1899	10.3
433.milc	1116	8.23	1115	8.23	1115	8.23	806	11.4	806	11.4	806	11.4
434.zeusmp	1330	6.84	1330	6.84	1330	6.84	1330	6.84	1330	6.84	1330	6.84
435.gromacs	684	10.4	684	10.4	684	10.4	650	11.0	650	11.0	650	11.0
436.cactusADM	773	15.5	773	15.5	773	15.5	771	15.5	771	15.5	771	15.5
437.leslie3d	791	11.9	792	11.9	791	11.9	638	14.7	638	14.7	639	14.7
444.namd	795	10.1	795	10.1	795	10.1	795	10.1	795	10.1	795	10.1
447.dealII	990	11.6	1010	11.3	976	11.7	862	13.3	862	13.3	863	13.3
450.soplex	1137	7.33	1137	7.33	1137	7.34	1137	7.33	1137	7.33	1137	7.34
453.povray	563	9.46	563	9.45	564	9.44	391	13.6	391	13.6	391	13.6
454.calculix	725	11.4	725	11.4	725	11.4	691	11.9	692	11.9	691	11.9
459.GemsFDTD	1154	9.19	1154	9.19	1154	9.19	1154	9.19	1154	9.19	1154	9.19
465.tonto	888	11.1	893	11.0	887	11.1	791	12.4	791	12.4	790	12.5
470.lbm	1041	13.2	1041	13.2	1041	13.2	861	16.0	861	16.0	861	16.0
481.wrf	925	12.1	925	12.1	925	12.1	915	12.2	915	12.2	915	12.2
482.sphinx3	2349	8.30	2350	8.29	2349	8.30	1785	10.9	1785	10.9	1785	10.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

These shell commands request use of local 4MB pages:

```

MPSSHEAP=4MB
MPSSSTACK=4MB
MADV=access_lwp
LD_PRELOAD=mpss.so.1:madv.so.1

```

'access_lwp' means that the next light weight process to touch the specified address range will access it the most heavily.

Stack size set to unlimited via "ulimit -s unlimited"

The run was bound to processor #27 using the "psrset" command
psrset -c processor id...: creates a set

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp2006 = 11.9

Sun SPARC Enterprise M8000

SPECfp_base2006 = 10.6

CPU2006 license: 6

Test date: Mar-2007

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

Operating System Notes (Continued)

psrset -e set_id command: runs command on a set

System Tunables:

(/etc/system parameters)

maxphys=4194304

Defines the maximum size of I/O requests, in bytes.

maxpgio=1024

Defines the maximum number of page I/O requests that can be queued by the paging system.

tune_t_fsflushr=1

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

autoup=60

Causes pages older than the listed number of seconds to be written by fsflush.

bufhwm=3000

Memory byte limit for caching I/O buffers

segmap_percent=1

Set maximum percent memory for file system cache

Platform Notes

"CMU" = CPU/Memory Unit; each holds 2 or 4 CPU chips.

Memory was 8-way interleaved by filling same capacity DIMMs in every other slot

This result is measured on a Fujitsu SPARC Enterprise M8000 Server. Note that the Fujitsu SPARC Enterprise M8000 and Sun SPARC Enterprise M8000 are electrically equivalent.

Base Compiler Invocation

C benchmarks:

/opt/SUNWspr012_EA070303/bin/cc

C++ benchmarks:

/opt/SUNWspr012_EA070303/bin/CC

Fortran benchmarks:

/opt/SUNWspr012_EA070303/bin/f90

Benchmarks using both Fortran and C:

/opt/SUNWspr012_EA070303/bin/cc /opt/SUNWspr012_EA070303/bin/f90



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp2006 =

11.9

Sun SPARC Enterprise M8000

SPECfp_base2006 =

10.6

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Mar-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

Base Optimization Flags

C benchmarks:

```
-fast -xipo=2 -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=sparcfmaf -fma=fused -Wc,-fma=fused -xprefetch_level=2
```

C++ benchmarks:

```
-library=stlport4 -fast -xipo=2 -xtarget=sparc64vi
-xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
-Qoption cg -fma=fused
```

Fortran benchmarks:

```
-fast -xipo=2 -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=sparcfmaf -fma=fused -Qoption cg -fma=fused -xprefetch_level=2
```

Benchmarks using both Fortran and C:

```
-fast(cc) -fast(f90) -xipo=2 -xtarget=sparc64vi
-xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
-Wc,-fma=fused -xprefetch_level=2 -Qoption cg -fma=fused
```

Peak Compiler Invocation

C benchmarks:

```
/opt/SUNWspr012_EA070303/bin/cc
```

C++ benchmarks:

```
/opt/SUNWspr012_EA070303/bin/CC
```

Fortran benchmarks:

```
/opt/SUNWspr012_EA070303/bin/f90
```

Benchmarks using both Fortran and C:

```
/opt/SUNWspr012_EA070303/bin/cc /opt/SUNWspr012_EA070303/bin/f90
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -fast -xipo=2 -xtarget=sparc64vi
-xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
-Wc,-fma=fused -xalias_level=strong -xprefetch_level=2
-xprefetch_auto_type=indirect_array_access
```

```
470.lbm: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=v8plusb -xprefetch_level=2 -fma=fused -Wc,-fma=fused
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp2006 =

11.9

Sun SPARC Enterprise M8000

SPECfp_base2006 =

10.6

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Mar-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

Peak Optimization Flags (Continued)

```
482.sphinx3: -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xipo=2
             -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
             -xarch=sparcfmaf -fma=fused -Wc,-fma=fused
```

C++ benchmarks:

444.namd: basepeak = yes

```
447.dealIII: -library=stlport4 -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xipo=2
             -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
             -xarch=sparcfmaf -fma=fused -Qoption cg -fma=fused -xdepend
             -xalias_level=compatible -xrestrict
```

450.soplex: basepeak = yes

```
453.povray: -library=stlport4 -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xipo=2
            -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
            -xarch=sparcfmaf -fma=fused -Qoption cg -fma=fused -xdepend
            -xalias_level=compatible
```

Fortran benchmarks:

```
410.bwaves: -fast -xipo=2 -xtarget=sparc64vi
            -xcache=128/64/2:6144/256/12 -xarch=v8plusb -xchip=ultra3cu
            -xprefetch_level=2 -xprefetch=latx:3.0 -fma=fused
            -Qoption cg -fma=fused
```

416.gamess: basepeak = yes

```
434.zeusmp: -fast -xipo=2 -xtarget=sparc64vi
            -xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
            -Qoption cg -fma=fused -lmopt
```

```
437.leslie3d: -fast -xipo=2 -xtarget=sparc64vi
              -xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
              -Qoption cg -fma=fused -xprefetch_level=2
              -xprefetch=latx:8.0
```

459.GemsFDTD: basepeak = yes

```
465.tonto: -xprofile=collect:./feedback(pass 1)
           -xprofile=use:./feedback(pass 2) -fast -xipo=2
           -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
           -xarch=v8plusa -fma=fused -Qoption cg -fma=fused -lfast
```

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp2006 = 11.9

Sun SPARC Enterprise M8000

SPECfp_base2006 = 10.6

CPU2006 license: 6

Test date: Mar-2007

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

Peak Optimization Flags (Continued)

```
435.gromacs: -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
             -xipo=2 -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
             -xarch=sparcfmaf -fma=fused -Wc,-fma=fused
             -Qoption cg -fma=fused
```

```
436.cactusADM: -fast(cc) -fast(f90) -xipo=2 -xtarget=sparc64vi
               -xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
               -Wc,-fma=fused -Qoption cg -fma=fused
```

454.calculix: Same as 436.cactusADM

```
481.wrf: -xprofile=collect:./feedback(pass 1)
          -xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
          -xipo=2 -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
          -xarch=sparcfmaf -fma=fused -Wc,-fma=fused
          -Qoption cg -fma=fused -xprefetch_level=2
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:34:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 May 2007.