



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale 3045
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp®2006 = 15.3

SPECfp_base2006 = 14.8

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Oct-2006

Software Availability: Nov-2006

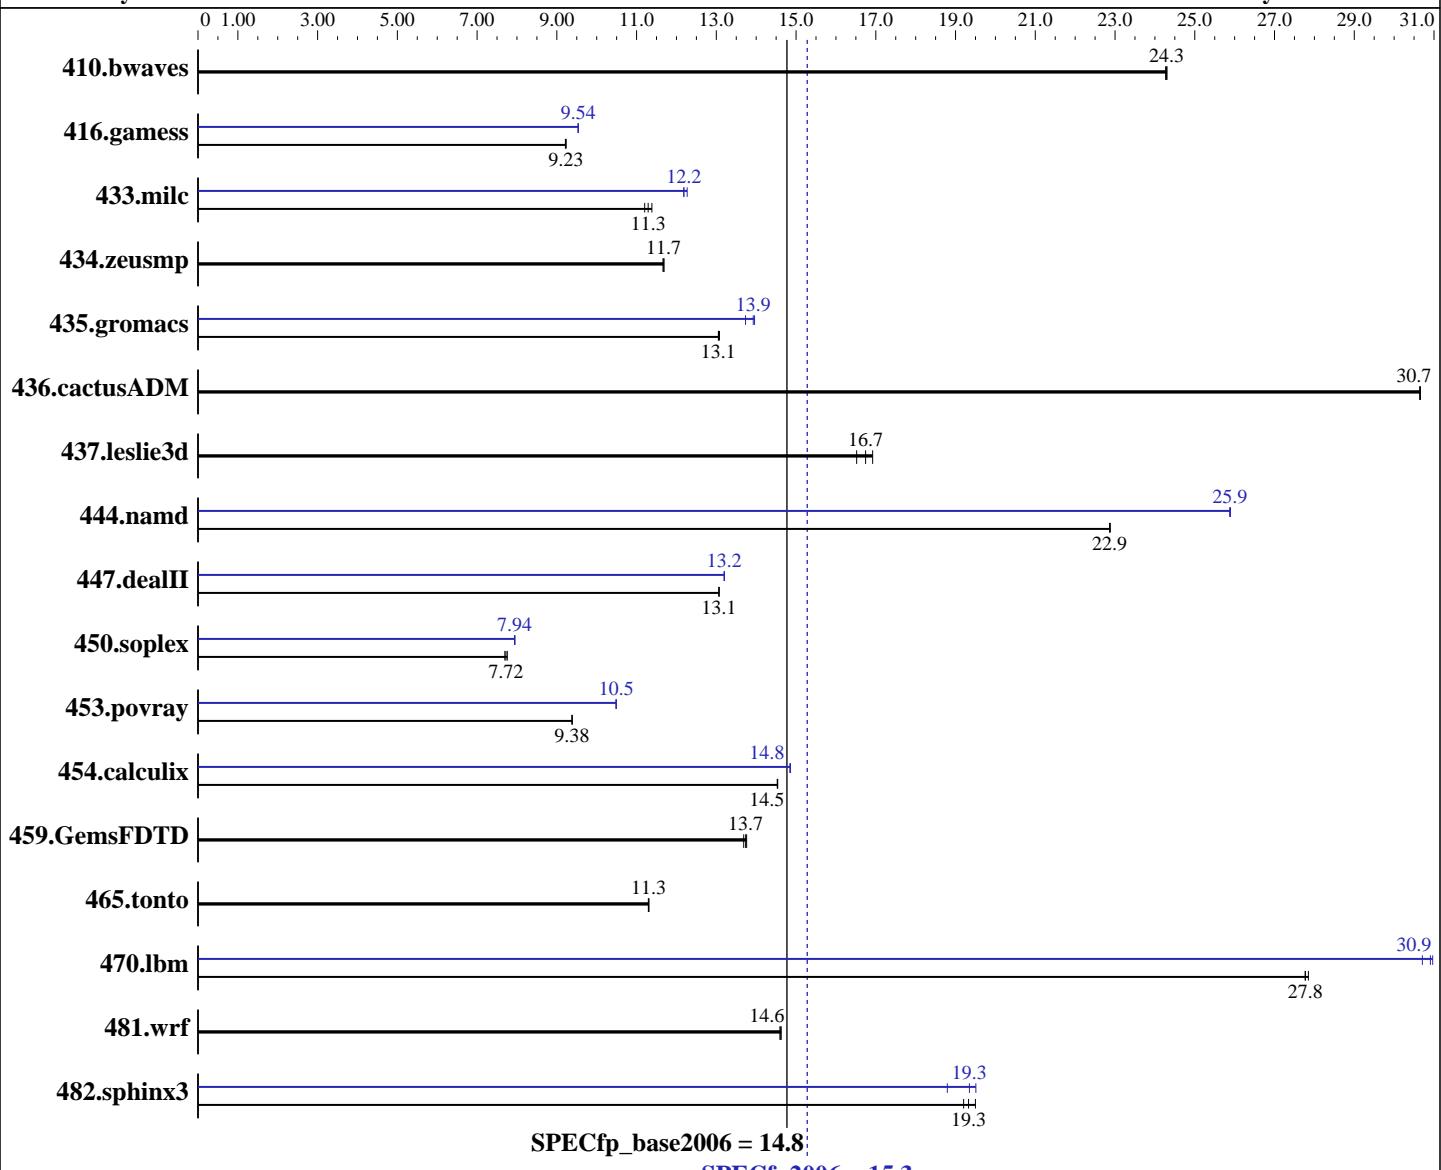

Hardware

CPU Name: Dual-Core Intel Itanium 2 9040
CPU Characteristics: 1.6GHz/18MB, 533MHz FSB
CPU MHz: 1600
FPU: Integrated
CPU(s) enabled: 1 core, 1 chip, 2 cores/chip
CPU(s) orderable: 1-4 chips
Primary Cache: 16 KB I + 16 KB D on chip per core
Secondary Cache: 1 MB I + 256 KB D on chip per core

Software

Operating System: Red Hat Enterprise Linux AS release 4 (Update 4)
Compiler: Intel C++ Compiler 9.1 for Linux (Build 20061105)
Auto Parallel: Intel Fortran Compiler 9.1 for Linux (Build 20061105)
File System: No
System State: ext3
Multi-user: Multi-user

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale 3045
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp2006 = 15.3

SPECfp_base2006 = 14.8

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Oct-2006

Software Availability: Nov-2006

L3 Cache: 9 MB I+D on chip per core
Other Cache: None
Memory: 64 GB (32x2GB DIMMs)
Disk Subsystem: 2x73 GB 15K RPM SAS
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio								
410.bwaves	560	24.3	559	24.3	559	24.3	560	24.3	559	24.3	559	24.3
416.gamess	2122	9.23	2125	9.21	2121	9.23	2053	9.54	2053	9.54	2053	9.54
433.milc	819	11.2	813	11.3	806	11.4	753	12.2	753	12.2	748	12.3
434.zeusmp	779	11.7	780	11.7	779	11.7	779	11.7	780	11.7	779	11.7
435.gromacs	547	13.1	547	13.1	546	13.1	520	13.7	511	14.0	513	13.9
436.cactusADM	390	30.7	390	30.6	390	30.7	390	30.7	390	30.6	390	30.7
437.leslie3d	569	16.5	556	16.9	561	16.7	569	16.5	556	16.9	561	16.7
444.namd	351	22.9	351	22.9	351	22.9	310	25.9	310	25.9	310	25.9
447.dealII	875	13.1	876	13.1	876	13.1	866	13.2	867	13.2	867	13.2
450.soplex	1075	7.76	1080	7.72	1084	7.70	1050	7.94	1050	7.94	1049	7.95
453.povray	567	9.38	567	9.38	567	9.38	507	10.5	507	10.5	507	10.5
454.calculix	567	14.5	568	14.5	568	14.5	555	14.9	556	14.8	556	14.8
459.GemsFDTD	771	13.8	772	13.7	775	13.7	771	13.8	772	13.7	775	13.7
465.tonto	870	11.3	871	11.3	871	11.3	870	11.3	871	11.3	871	11.3
470.lbm	495	27.8	495	27.8	493	27.9	447	30.7	444	31.0	445	30.9
481.wrf	764	14.6	765	14.6	765	14.6	764	14.6	765	14.6	765	14.6
482.sphinx3	1000	19.5	1015	19.2	1008	19.3	1007	19.3	1037	18.8	999	19.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

stacksize set to unlimited prior to run

system was booted uniprocessor by setting "maxcpus=0" kernel parameter in elilo.conf

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale 3045
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp2006 = 15.3

SPECfp_base2006 = 14.8

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Oct-2006

Software Availability: Nov-2006

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -IPF_fp_relaxed -ansi-alias

C++ benchmarks:
-fast -IPF_fp_relaxed -ansi-alias

Fortran benchmarks:
-fast -IPF_fp_relaxed

Benchmarks using both Fortran and C:
-fast -IPF_fp_relaxed -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale 3045
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp2006 = 15.3

SPECfp_base2006 = 14.8

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Oct-2006

Software Availability: Nov-2006

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

fort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -fast -IPF_fp_relaxed -ansi-alias -fno-alias

470.lbm: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-ansi-alias

482.sphinx3: Same as 470.lbm

C++ benchmarks:

444.namd: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-no-prefetch -fno-alias

447.dealII: -fast -IPF_fp_relaxed -ansi-alias -no-alias-args

450.soplex: -fast -IPF_fp_relaxed -ansi-alias -inline-factor=150

453.povray: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -fast -IPF_fp_relaxed -inline-factor=150

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale 3045
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp2006 = 15.3

SPECfp_base2006 = 14.8

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Oct-2006

Software Availability: Nov-2006

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-fno-alias -inline-factor=150

436.cactusADM: basepeak = yes

454.calculix: -fast -IPF_fp_relaxed -fno-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/IPF_intel91_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/IPF_intel91_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 12:16:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 May 2007.