



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]2006 = 21.2

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp_base2006 = 18.2

CPU2006 license: 3


Test date: Aug-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

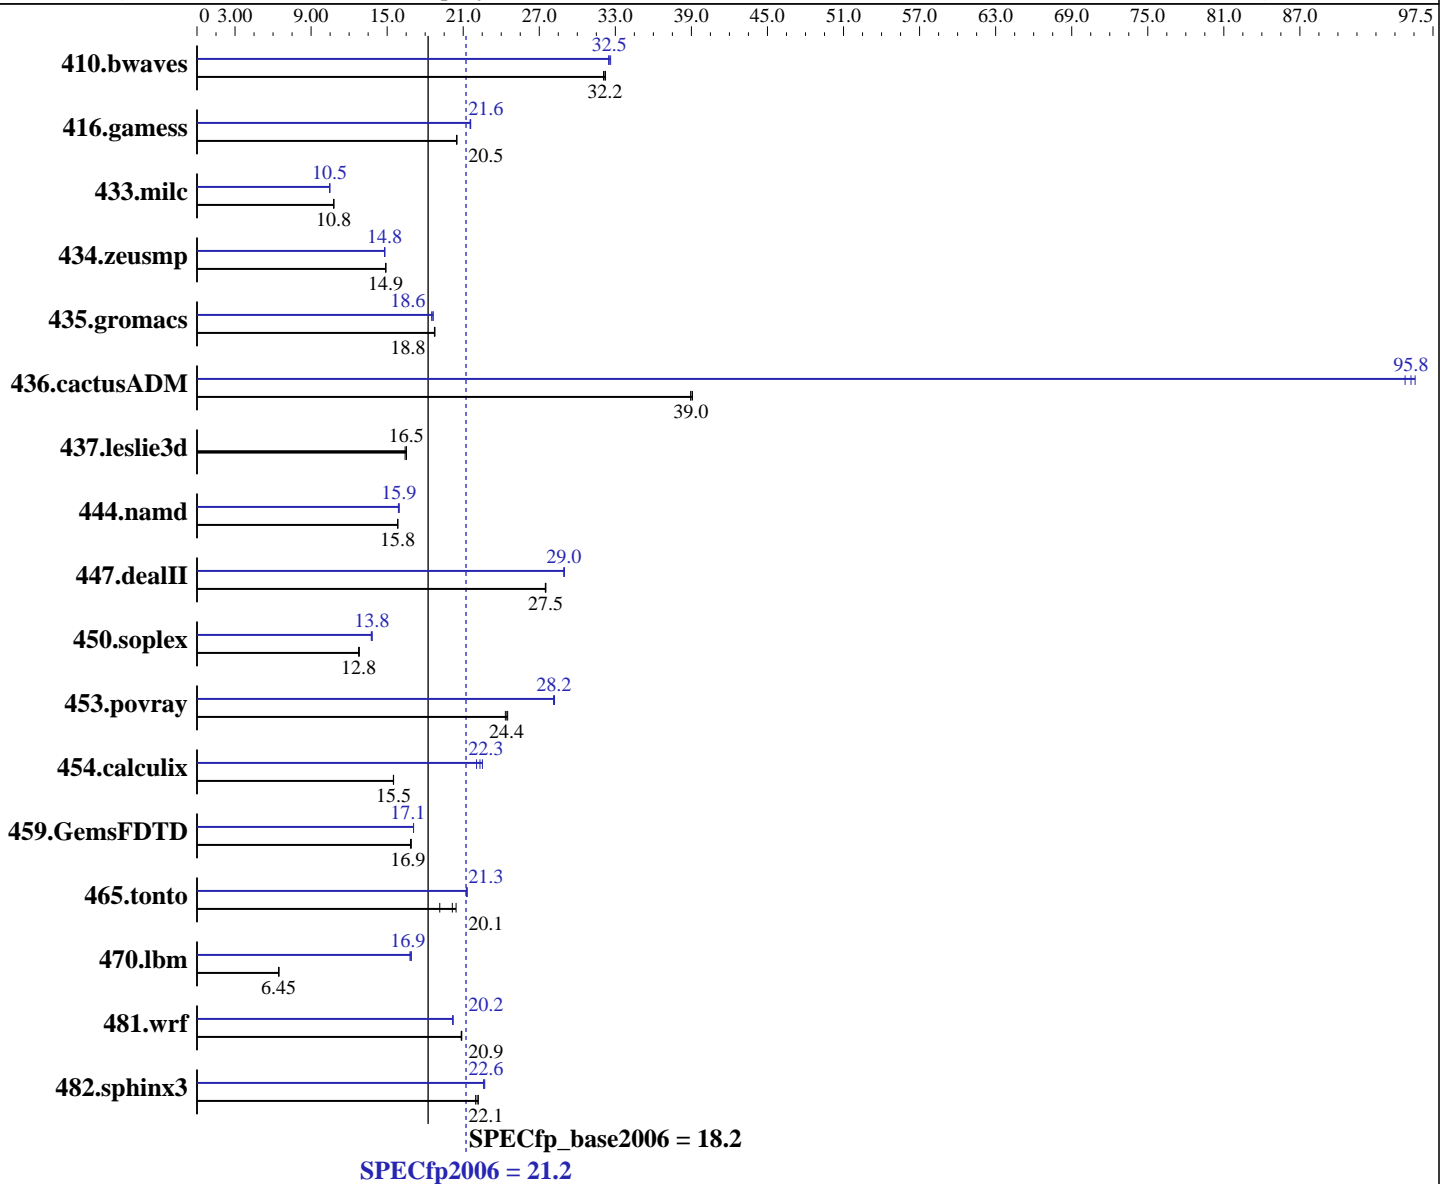

Hardware	
CPU Name:	Intel Xeon X5365
CPU Characteristics:	3.0 GHz, 2x4 MB L2 shared, 1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Software	
Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1 kernel 2.6.16.46-0.12-smpp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	Yes
File System:	ext2
System State:	Multi-user run level 3
Base Pointers:	64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = **21.2**

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp_base2006 = **18.2**

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem: 1x72 GB 15 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: binutils-2.17.50

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>422</u>	<u>32.2</u>	424	32.1	422	32.2	<u>418</u>	<u>32.5</u>	419	32.5	417	32.6
416.gamess	<u>956</u>	<u>20.5</u>	955	20.5	956	20.5	909	21.5	907	21.6	<u>908</u>	<u>21.6</u>
433.milc	<u>851</u>	<u>10.8</u>	850	10.8	852	10.8	<u>877</u>	<u>10.5</u>	877	10.5	876	10.5
434.zeusmp	<u>611</u>	<u>14.9</u>	611	14.9	612	14.9	<u>614</u>	<u>14.8</u>	614	14.8	615	14.8
435.gromacs	<u>381</u>	<u>18.8</u>	381	18.8	381	18.7	383	18.6	<u>384</u>	<u>18.6</u>	386	18.5
436.cactusADM	306	39.1	<u>307</u>	<u>39.0</u>	307	39.0	<u>125</u>	<u>95.8</u>	125	95.3	124	96.1
437.leslie3d	<u>569</u>	<u>16.5</u>	569	16.5	573	16.4	<u>569</u>	<u>16.5</u>	569	16.5	573	16.4
444.namd	506	15.8	<u>507</u>	<u>15.8</u>	507	15.8	505	15.9	503	15.9	<u>503</u>	<u>15.9</u>
447.dealII	<u>416</u>	<u>27.5</u>	416	27.5	416	27.5	<u>395</u>	<u>29.0</u>	395	29.0	395	28.9
450.soplex	651	12.8	654	12.8	<u>653</u>	<u>12.8</u>	604	13.8	607	13.7	<u>604</u>	<u>13.8</u>
453.povray	217	24.5	219	24.3	<u>218</u>	<u>24.4</u>	<u>189</u>	<u>28.2</u>	189	28.2	189	28.1
454.calculix	<u>532</u>	<u>15.5</u>	532	15.5	533	15.5	366	22.5	374	22.1	<u>370</u>	<u>22.3</u>
459.GemsFDTD	<u>629</u>	<u>16.9</u>	628	16.9	630	16.8	621	17.1	621	17.1	<u>621</u>	<u>17.1</u>
465.tonto	481	20.4	<u>489</u>	<u>20.1</u>	514	19.1	<u>462</u>	<u>21.3</u>	463	21.2	462	21.3
470.lbm	2125	6.47	2135	6.44	<u>2130</u>	<u>6.45</u>	<u>815</u>	<u>16.9</u>	818	16.8	812	16.9
481.wrf	<u>535</u>	<u>20.9</u>	535	20.9	536	20.8	553	20.2	<u>553</u>	<u>20.2</u>	554	20.2
482.sphinx3	<u>882</u>	<u>22.1</u>	887	22.0	878	22.2	859	22.7	<u>861</u>	<u>22.6</u>	862	22.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.2

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp_base2006 = 18.2

CPU2006 license: 3

Test date: Aug-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -parallel

C++ benchmarks:

-fast -parallel

Fortran benchmarks:

-fast -parallel

Benchmarks using both Fortran and C:

-fast -parallel



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.2

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp_base2006 = 18.2

CPU2006 license: 3

Test date: Aug-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icpc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.2

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp_base2006 = 18.2

CPU2006 license: 3

Test date: Aug-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.01.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp2006 = 21.2

SPECfp_base2006 = 18.2

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:35:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 September 2007.