



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R422  
(Intel Xeon processor 5160,3.00GHz)

**SPECfp®2006 = 18.4**

**SPECfp\_base2006 = 17.9**

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Sep-2007

Hardware Availability: Aug-2007

Software Availability: May-2007

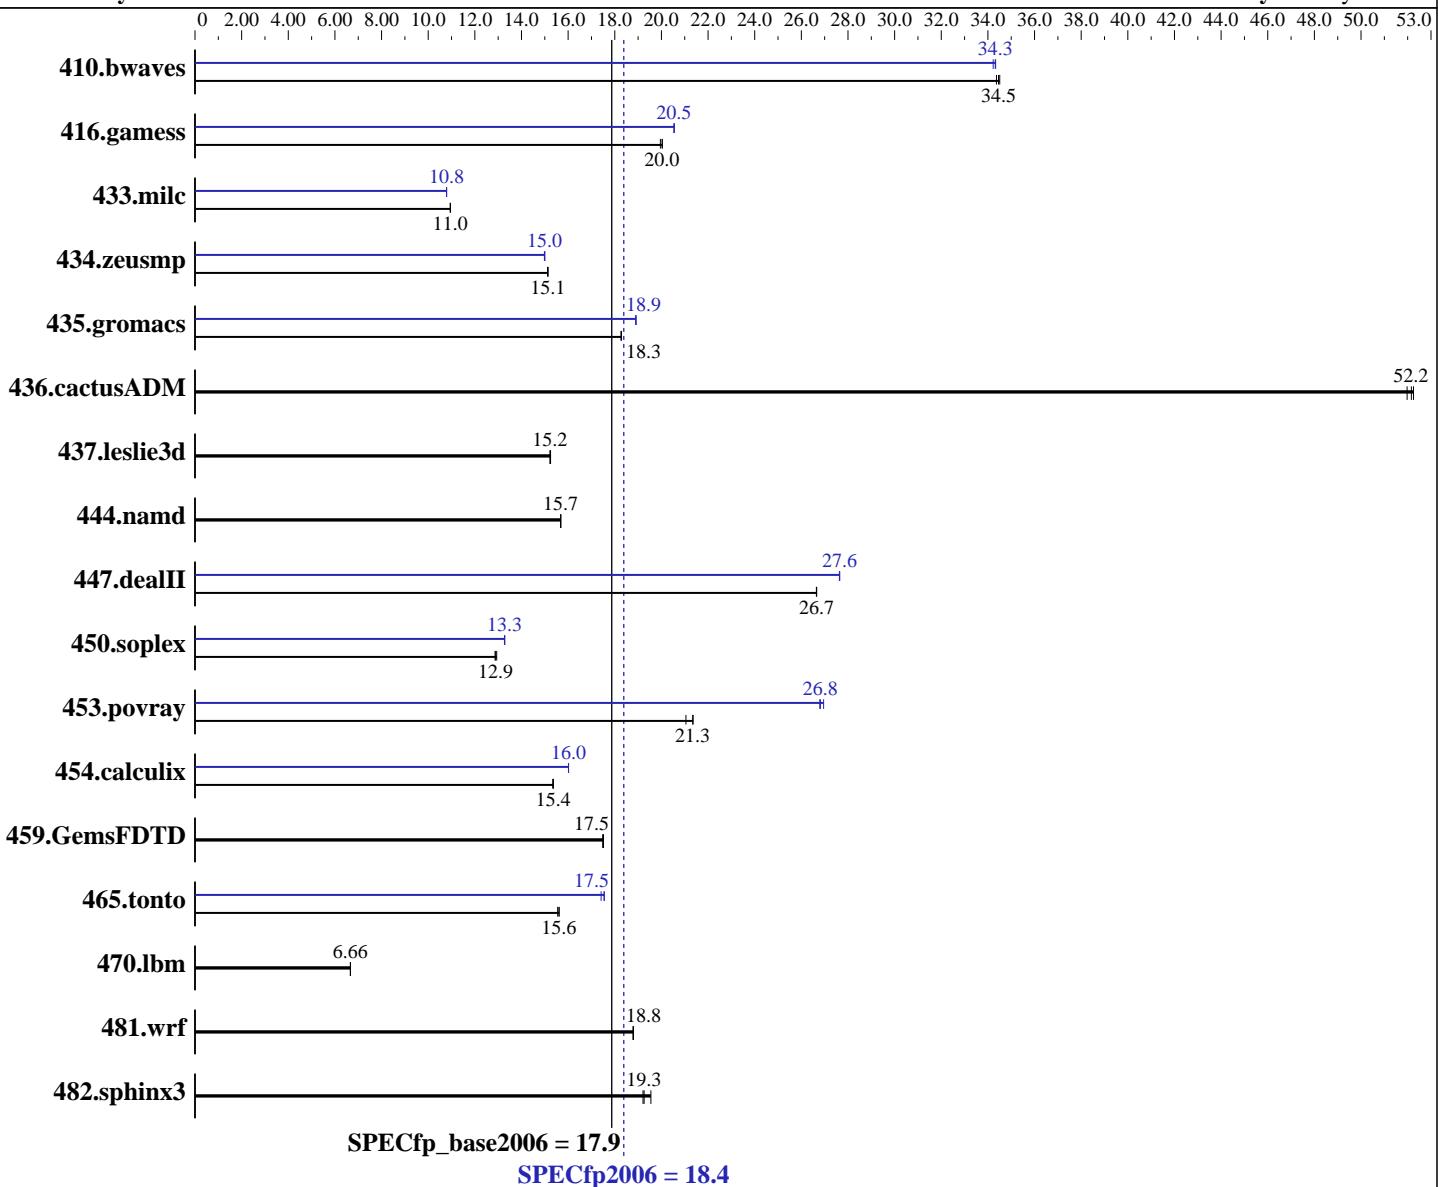

Hardware	
CPU Name:	Intel Xeon 5160
CPU Characteristics:	3.00 GHz, 4 MB L2, 1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1 to 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip

Software	
Operating System:	SUSE LINUX Enterprise Server 10
Compiler:	Kernel 2.6.16.21-0.8-smp for x86_64
	Intel C++ Compiler for IA32/EM64T application
	version 9.1
	Build 20070510 Package ID: l_cc_p_9.1.051
Auto Parallel:	Intel Fortran Compiler for IA32/EM64T application
File System:	version 9.1
	Build 20070510 Package ID: l_fc_p_9.1.051
Yes	
ext3	

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R422  
(Intel Xeon processor 5160,3.00GHz)

**SPECfp2006 = 18.4**

**SPECfp\_base2006 = 17.9**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Sep-2007

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (8x1 GB) FB-DIMM PC2-5300F ECC CL5  
Disk Subsystem: 1x147 GB SAS, 15000 RPM  
Other Hardware: None

System State: Multi-user run level 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: --

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	394	34.5	395	34.4	<b>394</b>	<b>34.5</b>	397	34.2	396	34.3	<b>396</b>	<b>34.3</b>
416.gamess	981	20.0	<b>978</b>	<b>20.0</b>	977	20.0	<b>953</b>	<b>20.5</b>	953	20.5	953	20.5
433.milc	838	11.0	<b>838</b>	<b>11.0</b>	838	10.9	<b>851</b>	<b>10.8</b>	851	10.8	851	10.8
434.zeusmp	602	15.1	<b>601</b>	<b>15.1</b>	601	15.1	<b>607</b>	<b>15.0</b>	607	15.0	<b>607</b>	<b>15.0</b>
435.gromacs	390	18.3	<b>391</b>	<b>18.3</b>	391	18.3	378	18.9	378	18.9	<b>378</b>	<b>18.9</b>
436.cactusADM	230	52.0	229	52.3	<b>229</b>	<b>52.2</b>	230	52.0	229	52.3	<b>229</b>	<b>52.2</b>
437.leslie3d	616	15.2	<b>617</b>	<b>15.2</b>	617	15.2	<b>616</b>	<b>15.2</b>	<b>617</b>	<b>15.2</b>	617	15.2
444.namd	<b>511</b>	<b>15.7</b>	511	15.7	511	15.7	<b>511</b>	<b>15.7</b>	511	15.7	511	15.7
447.dealII	<b>429</b>	<b>26.7</b>	429	26.6	429	26.7	<b>414</b>	<b>27.6</b>	414	27.6	<b>414</b>	<b>27.6</b>
450.soplex	<b>647</b>	<b>12.9</b>	648	12.9	645	12.9	<b>628</b>	<b>13.3</b>	628	13.3	<b>628</b>	<b>13.3</b>
453.povray	249	21.4	<b>249</b>	<b>21.3</b>	253	21.1	<b>199</b>	<b>26.8</b>	<b>198</b>	<b>26.8</b>	197	27.0
454.calculix	537	15.4	538	15.3	<b>537</b>	<b>15.4</b>	<b>515</b>	<b>16.0</b>	515	16.0	515	16.0
459.GemsFDTD	<b>606</b>	<b>17.5</b>	607	17.5	606	17.5	<b>606</b>	<b>17.5</b>	607	17.5	606	17.5
465.tonto	630	15.6	633	15.6	<b>630</b>	<b>15.6</b>	<b>561</b>	<b>17.5</b>	565	17.4	561	17.6
470.lbm	2061	6.67	<b>2062</b>	<b>6.66</b>	2062	6.66	<b>2061</b>	<b>6.67</b>	<b>2062</b>	<b>6.66</b>	2062	6.66
481.wrf	594	18.8	<b>594</b>	<b>18.8</b>	595	18.8	<b>594</b>	<b>18.8</b>	<b>594</b>	<b>18.8</b>	595	18.8
482.sphinx3	1014	19.2	<b>1012</b>	<b>19.3</b>	997	19.5	<b>1014</b>	<b>19.2</b>	<b>1012</b>	<b>19.3</b>	997	19.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
The R422 is built with two identical (half size) motherboards.  
Only one of the two motherboards was powered on during the test run.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R422  
(Intel Xeon processor 5160,3.00GHz)

**SPECfp2006 =**

**18.4**

**SPECfp\_base2006 =**

**17.9**

**CPU2006 license:** 20

**Test date:**

Sep-2007

**Test sponsor:** Bull SAS

**Hardware Availability:**

Aug-2007

**Tested by:** Bull SAS

**Software Availability:**

May-2007

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        450.soplex: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
-fast -parallel

C++ benchmarks:  
-fast -parallel

Fortran benchmarks:  
-fast -parallel

Benchmarks using both Fortran and C:  
-fast -parallel

## Peak Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R422  
(Intel Xeon processor 5160,3.00GHz)

**SPECfp2006 = 18.4**

**SPECfp\_base2006 = 17.9**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Sep-2007

**Hardware Availability:** Aug-2007

**Software Availability:** May-2007

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -fast -auto\_ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -fast -auto\_ilp32

450.soplex: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -parallel  
-auto\_ilp32

453.povray: Same as 450.soplex

Fortran benchmarks:

410.bwaves: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -parallel

416.gamess: -fast

434.zeusmp: Same as 410.bwaves

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R422  
(Intel Xeon processor 5160,3.00GHz)

**SPECfp2006 = 18.4**

**SPECfp\_base2006 = 17.9**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Sep-2007

**Hardware Availability:** Aug-2007

**Software Availability:** May-2007

## Peak Optimization Flags (Continued)

465.tonto: Same as 410.bwaves

Benchmarks using both Fortran and C:

435.gromacs: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -parallel  
-auto\_ilp32

436.cactusADM: basepeak = yes

454.calculix: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -auto\_ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel100\\_flags.html](http://www.spec.org/cpu2006/flags/EM64T_Intel100_flags.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel100\\_flags.xml](http://www.spec.org/cpu2006/flags/EM64T_Intel100_flags.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:04:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 October 2007.