



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460  
(Intel Xeon processor E5310,1.60GHz)

SPECint®2006 = 12.5

SPECint\_base2006 = 11.3

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jul-2007

Hardware Availability: May-2007

Software Availability: May-2007

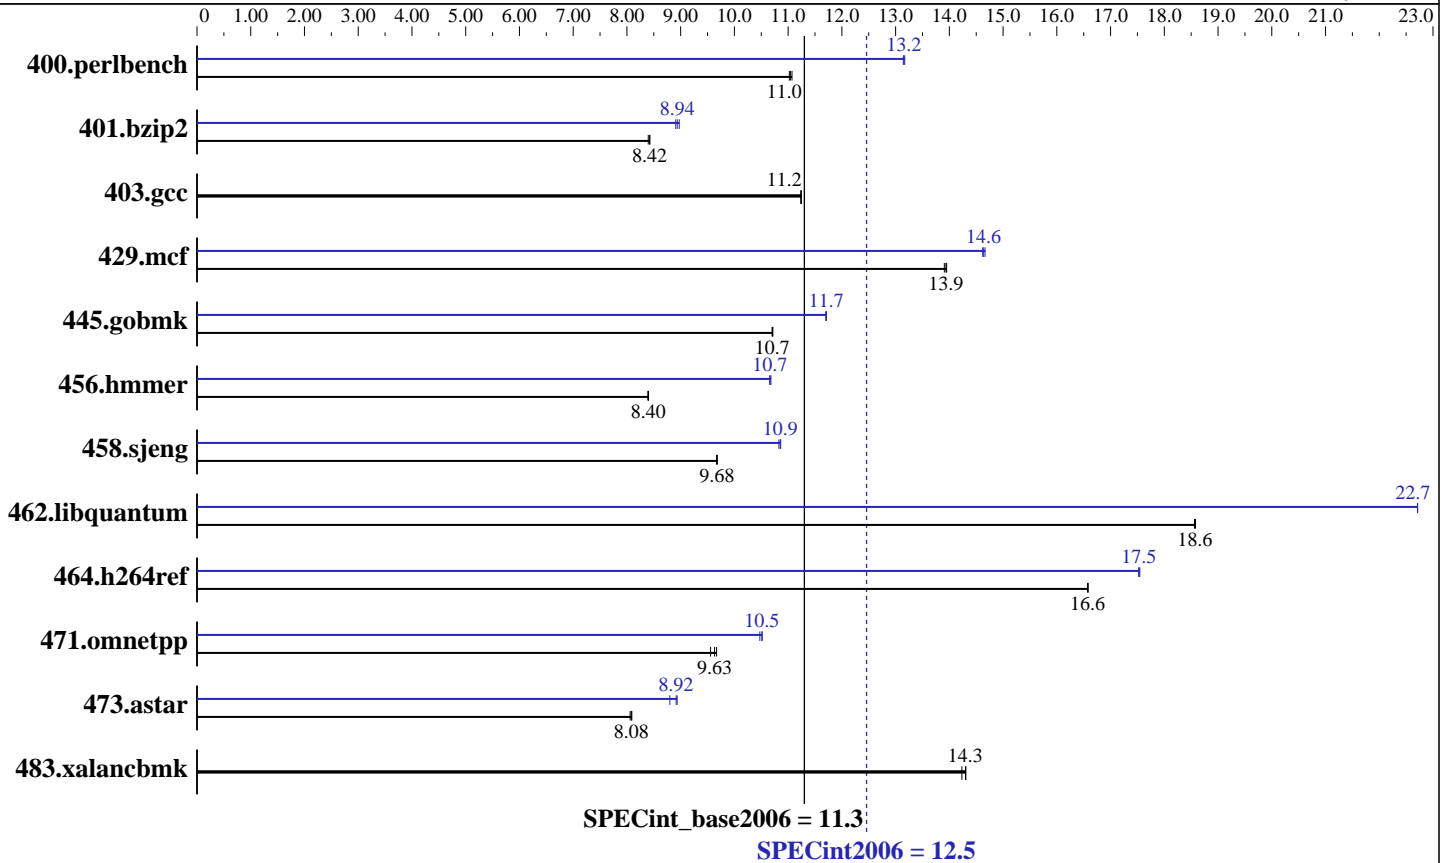

### Hardware

CPU Name: Intel Xeon E5310  
 CPU Characteristics: 1.60 GHz, 8 MB L2, 1066 MHz system bus  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1 to 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 12 GB (12x1 GB) FB-DIMM PC2-4200F ECC CL4  
 Disk Subsystem: 1x73 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE LINUX Enterprise Server 10  
 Kernel 2.6.16.21-0.8-smp for x86\_64  
 Compiler: Intel C++ Compiler for Linux32 version 10.0  
 Build 20070426 Package ID: l\_cc\_p\_10.0.023  
 Auto Parallel: No  
 File System: ext2  
 System State: Multi-user run level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap library V8.1  
 Binutils 2.17.50.0.15



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460  
(Intel Xeon processor E5310,1.60GHz)

SPECint2006 = 12.5

SPECint\_base2006 = 11.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Jul-2007  
Hardware Availability: May-2007  
Software Availability: May-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	882	11.1	886	11.0	<b>885</b>	<b>11.0</b>	743	13.1	<b>743</b>	<b>13.2</b>	742	13.2
401.bzip2	1145	8.43	1149	8.40	<b>1145</b>	<b>8.42</b>	1083	8.91	<b>1080</b>	<b>8.94</b>	1075	8.97
403.gcc	716	11.2	716	11.2	<b>716</b>	<b>11.2</b>	716	11.2	716	11.2	<b>716</b>	<b>11.2</b>
429.mcf	<b>654</b>	<b>13.9</b>	656	13.9	654	13.9	624	14.6	<b>623</b>	<b>14.6</b>	622	14.7
445.gobmk	980	10.7	979	10.7	<b>980</b>	<b>10.7</b>	<b>896</b>	<b>11.7</b>	897	11.7	896	11.7
456.hmmer	1112	8.39	1110	8.40	<b>1111</b>	<b>8.40</b>	<b>875</b>	<b>10.7</b>	875	10.7	874	10.7
458.sjeng	<b>1250</b>	<b>9.68</b>	1250	9.68	1252	9.67	1114	10.9	1117	10.8	<b>1115</b>	<b>10.9</b>
462.libquantum	<b>1116</b>	<b>18.6</b>	1116	18.6	1115	18.6	<b>912</b>	<b>22.7</b>	912	22.7	912	22.7
464.h264ref	<b>1335</b>	<b>16.6</b>	1335	16.6	1335	16.6	<b>1262</b>	<b>17.5</b>	1263	17.5	1261	17.5
471.omnetpp	646	9.67	654	9.56	<b>649</b>	<b>9.63</b>	597	10.5	<b>595</b>	<b>10.5</b>	594	10.5
473.astar	871	8.06	<b>869</b>	<b>8.08</b>	868	8.09	<b>787</b>	<b>8.92</b>	798	8.80	786	8.94
483.xalancbmk	482	14.3	485	14.2	<b>483</b>	<b>14.3</b>	482	14.3	485	14.2	<b>483</b>	<b>14.3</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode

## General Notes

The NovaScale R440 and the NovaScale R460 models are electronically equivalent.  
The results have been measured on a NovaScale R460 model.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460  
(Intel Xeon processor E5310,1.60GHz)

SPECint2006 = 12.5

SPECint\_base2006 = 11.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Jul-2007  
Hardware Availability: May-2007  
Software Availability: May-2007

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast  
  
C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/cpu2006/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc  
  
401.bzip2: /opt/intel/cce/10.0.023/bin/icc  
-L/opt/intel/cce/10.0.023/lib  
-I/opt/intel/cce/10.0.023/include  
  
456.hmmmer: /opt/intel/cce/10.0.023/bin/icc  
-L/opt/intel/cce/10.0.023/lib  
-I/opt/intel/cce/10.0.023/include  
  
C++ benchmarks:  
icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460  
(Intel Xeon processor E5310,1.60GHz)

SPECint2006 = 12.5

SPECint\_base2006 = 11.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Jul-2007  
Hardware Availability: May-2007  
Software Availability: May-2007

## Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

403.gcc: basepeak = yes

429.mcf: -fast -prefetch

445.gobmk: -prof\_gen(pass 1) -prof\_use(pass 2) -xT -O2 -ipo  
-no-prec\_div -ansi-alias

456.hmmer: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -unroll2  
-ansi-alias

458.sjeng: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -unroll4

462.libquantum: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -unroll4 -Ob0  
-prefetch -opt-streaming-stores always

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -prof\_gen(pass 1) -prof\_use(pass 2) -xT -O3 -ipo  
-no-prec\_div -ansi-alias -Wl,-z,muldefs  
-L/spec/cpu2006/lib -lsmartheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460  
(Intel Xeon processor E5310,1.60GHz)

**SPECint2006 = 12.5**

**SPECint\_base2006 = 11.3**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Jul-2007  
**Hardware Availability:** May-2007  
**Software Availability:** May-2007

The flags file that was used to format this result can be browsed at  
[http://www.spec.org/cpu2006/flags/EM64T\\_Intel100\\_flags.20090714.html](http://www.spec.org/cpu2006/flags/EM64T_Intel100_flags.20090714.html)

You can also download the XML flags source by saving the following link:  
[http://www.spec.org/cpu2006/flags/EM64T\\_Intel100\\_flags.20090714.xml](http://www.spec.org/cpu2006/flags/EM64T_Intel100_flags.20090714.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 14:00:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 October 2007.