



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(2.0 GHz, Intel Xeon processor 5130)

**SPECfp®2006 = 16.4**

**SPECfp\_base2006 = 14.3**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Jun-2006

Software Availability: Nov-2007

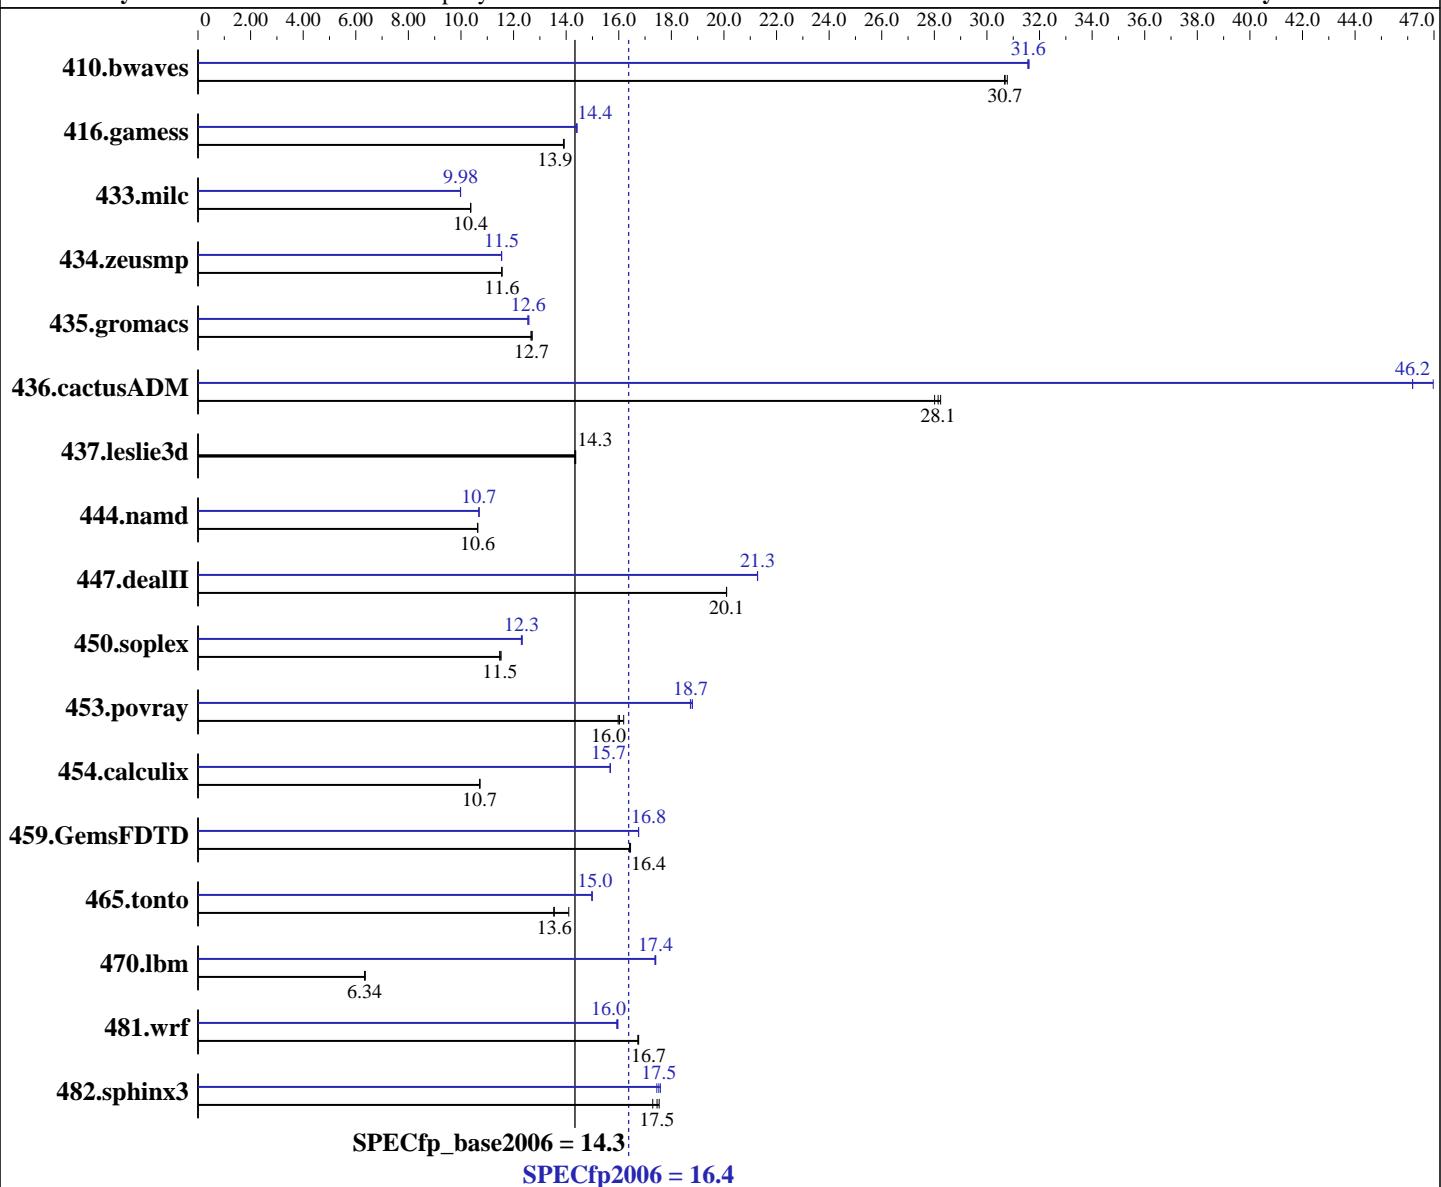

### Hardware

CPU Name: Intel Xeon 5130  
CPU Characteristics: 2.0 GHz, 4 MB L2 shared, 1333 MHz system bus  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
CPU(s) orderable: 1 or 2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 4 MB I+D on chip per chip

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1 kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070824  
Auto Parallel: Yes  
File System: ext2  
System State: Multi-user run level 3  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(2.0 GHz, Intel Xeon processor 5130)

**SPECfp2006 = 16.4**

**SPECfp\_base2006 = 14.3**

**CPU2006 license:** 3

**Test date:** Sep-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (8x1 GB PC2-5300F CL5)  
Disk Subsystem: 1x72 GB 10 K SAS  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: binutils-2.17.50

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio								
410.bwaves	443	30.7	<b>443</b>	<b>30.7</b>	442	30.8	431	31.6	430	31.6	<b>430</b>	<b>31.6</b>
416.gamess	1407	13.9	1409	13.9	<b>1407</b>	<b>13.9</b>	<b>1360</b>	<b>14.4</b>	1361	14.4	1358	14.4
433.milc	<b>885</b>	<b>10.4</b>	885	10.4	886	10.4	920	9.98	919	9.99	<b>919</b>	<b>9.98</b>
434.zeusmp	788	11.6	<b>788</b>	<b>11.6</b>	788	11.6	789	11.5	788	11.5	<b>788</b>	<b>11.5</b>
435.gromacs	562	12.7	564	12.7	<b>563</b>	<b>12.7</b>	567	12.6	569	12.5	<b>569</b>	<b>12.6</b>
436.cactusADM	<b>425</b>	<b>28.1</b>	427	28.0	423	28.2	<b>259</b>	<b>46.2</b>	259	46.2	254	47.0
437.leslie3d	<b>655</b>	<b>14.3</b>	654	14.4	656	14.3	<b>655</b>	<b>14.3</b>	654	14.4	656	14.3
444.namd	754	10.6	755	10.6	<b>754</b>	<b>10.6</b>	750	10.7	751	10.7	<b>751</b>	<b>10.7</b>
447.dealII	<b>569</b>	<b>20.1</b>	569	20.1	569	20.1	<b>538</b>	<b>21.3</b>	538	21.3	538	21.3
450.soplex	724	11.5	<b>726</b>	<b>11.5</b>	727	11.5	676	12.3	678	12.3	<b>677</b>	<b>12.3</b>
453.povray	333	16.0	<b>332</b>	<b>16.0</b>	329	16.2	283	18.8	284	18.7	<b>284</b>	<b>18.7</b>
454.calculix	770	10.7	<b>770</b>	<b>10.7</b>	770	10.7	526	15.7	526	15.7	<b>526</b>	<b>15.7</b>
459.GemsFDTD	<b>646</b>	<b>16.4</b>	646	16.4	645	16.4	633	16.8	<b>633</b>	<b>16.8</b>	633	16.7
465.tonto	<b>726</b>	<b>13.6</b>	698	14.1	727	13.5	656	15.0	657	15.0	<b>657</b>	<b>15.0</b>
470.lbm	2159	6.36	<b>2168</b>	<b>6.34</b>	2169	6.34	791	17.4	<b>790</b>	<b>17.4</b>	789	17.4
481.wrf	668	16.7	667	16.8	<b>667</b>	<b>16.7</b>	699	16.0	<b>700</b>	<b>16.0</b>	702	15.9
482.sphinx3	<b>1117</b>	<b>17.5</b>	1111	17.5	1127	17.3	<b>1117</b>	<b>17.4</b>	<b>1112</b>	<b>17.5</b>	1108	17.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 200M

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(2.0 GHz, Intel Xeon processor 5130)

**SPECfp2006 = 16.4**

**SPECfp\_base2006 = 14.3**

**CPU2006 license:** 3

**Test date:** Sep-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2007

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast -parallel

C++ benchmarks:  
-fast -parallel

Fortran benchmarks:  
-fast -parallel

Benchmarks using both Fortran and C:  
-fast -parallel



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(2.0 GHz, Intel Xeon processor 5130)

**SPECfp2006 = 16.4**

**SPECfp\_base2006 = 14.3**

**CPU2006 license:** 3

**Test date:** Sep-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/home/cmpllr/usr3/alrahate/compilers/icl0.1mainline/20070824/Linux32/bin/icc
-L/home/cmpllr/usr3/alrahate/compilers/icl0.1mainline/20070824/Linux32/lib
-I/home/cmpllr/usr3/alrahate/compilers/icl0.1mainline/20070824/Linux32/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /home/cmpllr/usr3/alrahate/compilers/icl0.1mainline/20070824/Linux32/bin/icpc
-L/home/cmpllr/usr3/alrahate/compilers/icl0.1mainline/20070824/Linux32/lib
-I/home/cmpllr/usr3/alrahate/compilers/icl0.1mainline/20070824/Linux32/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
 -auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
 -scalar-rep -prefetch -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(2.0 GHz, Intel Xeon processor 5130)

**SPECfp2006 =**

**16.4**

**SPECfp\_base2006 =**

**14.3**

**CPU2006 license:** 3

**Test date:** Sep-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(2.0 GHz, Intel Xeon processor 5130)

**SPECfp2006 =** 16.4

**SPECfp\_base2006 =** 14.3

**CPU2006 license:** 3

**Test date:** Sep-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:48:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 October 2007.