



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7210, 2.40 GHz)

SPECfp®2006 = 18.6

SPECfp_base2006 = 16.5

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2007

Hardware Availability: Oct-2007

Software Availability: Nov-2007

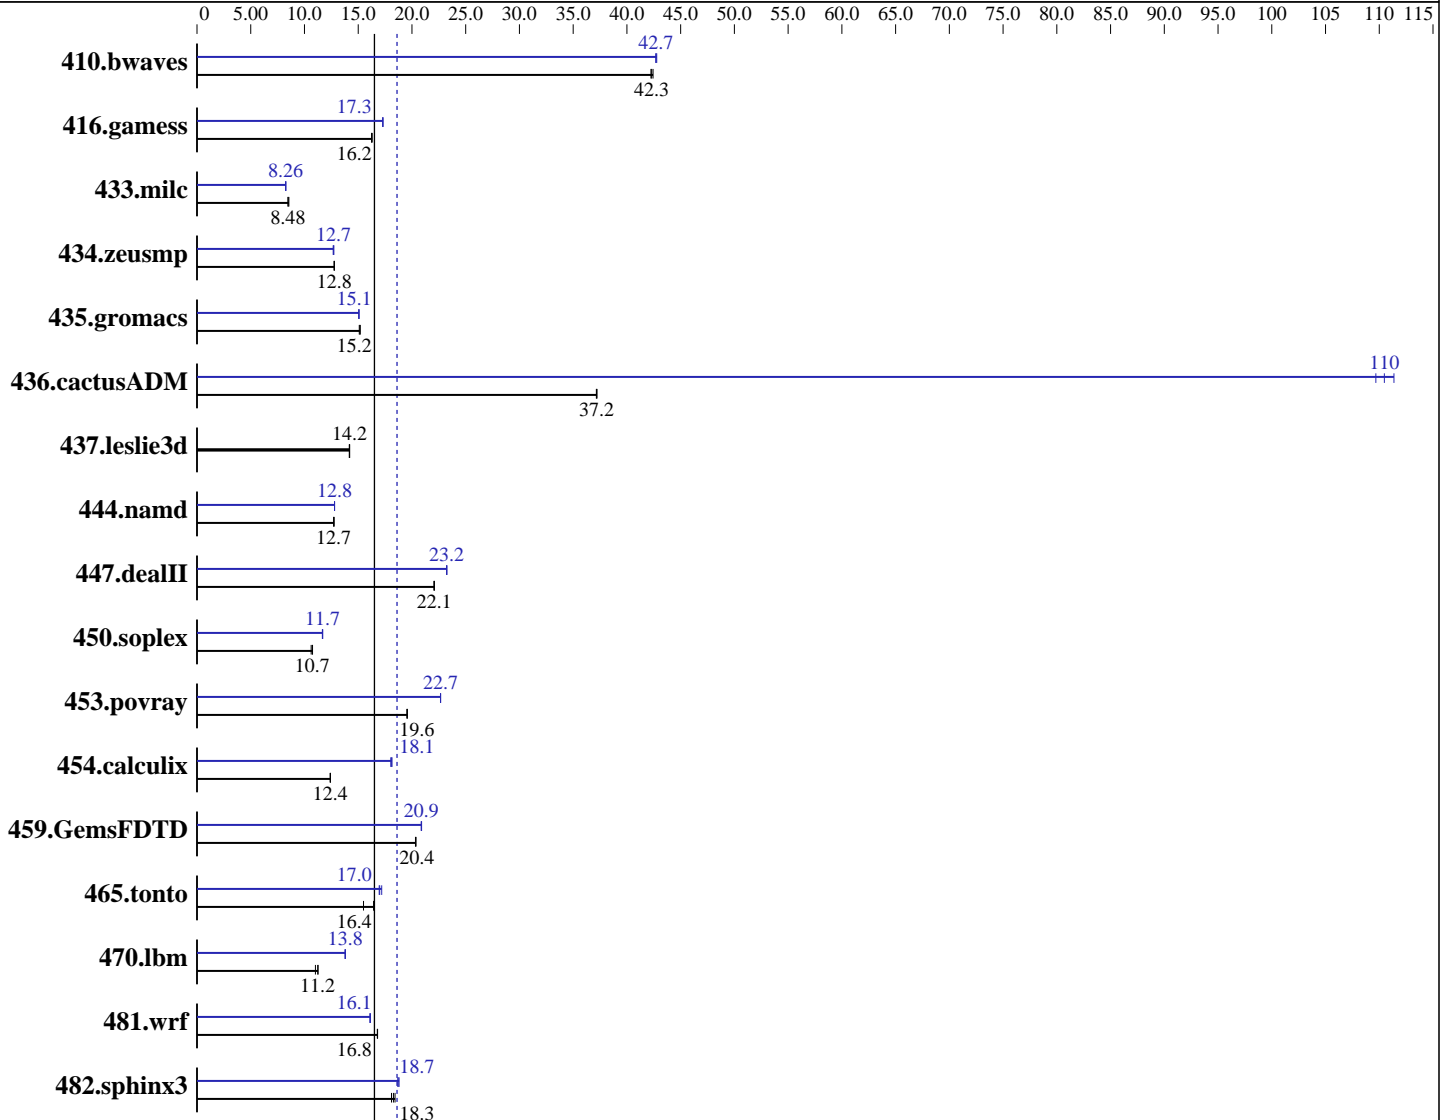

SPECfp_base2006 = 16.5
SPECfp2006 = 18.6

Hardware

CPU Name: Intel Xeon E7210
 CPU Characteristics: Dual Core, 2.40 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip
 CPU(s) orderable: 1,2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core

Continued on next page

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10 SP1 RC1, Kernel linux-cbgn 2.6.16.43-0.5-smp for x86_64
 Compiler: Intel C++ Compiler for Linux32 and Linux64 Version 10.1 Build 20070725
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7210, 2.40 GHz)

SPECfp2006 = 18.6

SPECfp_base2006 = 16.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2007

Hardware Availability: Oct-2007

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (16 * 1GB Samsung DDR2 5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: Seagate, SAS, 73GB, 10Krpm, 1 disk only
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: SmartHeap library V8.1
Binutils 2.17.50.0.15

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	322	42.2	321	42.3	320	42.4	318	42.8	318	42.7	318	42.7
416.gamess	1201	16.3	1205	16.2	1205	16.2	1132	17.3	1132	17.3	1133	17.3
433.milc	1084	8.47	1074	8.55	1083	8.48	1112	8.26	1112	8.26	1112	8.25
434.zeusmp	712	12.8	713	12.8	713	12.8	718	12.7	716	12.7	715	12.7
435.gromacs	473	15.1	471	15.2	470	15.2	474	15.1	474	15.1	474	15.1
436.cactusADM	321	37.2	322	37.2	321	37.2	107	111	109	110	108	110
437.leslie3d	662	14.2	662	14.2	663	14.2	662	14.2	662	14.2	663	14.2
444.namd	631	12.7	630	12.7	629	12.8	627	12.8	627	12.8	627	12.8
447.dealII	519	22.1	518	22.1	518	22.1	492	23.2	493	23.2	492	23.2
450.soplex	776	10.8	785	10.6	777	10.7	713	11.7	715	11.7	713	11.7
453.povray	272	19.5	272	19.6	272	19.6	235	22.7	235	22.7	235	22.7
454.calculix	665	12.4	665	12.4	665	12.4	456	18.1	455	18.1	458	18.0
459.GemsFDTD	521	20.4	521	20.4	522	20.3	508	20.9	508	20.9	509	20.9
465.tonto	599	16.4	635	15.5	598	16.4	573	17.2	580	17.0	579	17.0
470.lbm	1247	11.0	1223	11.2	1220	11.3	996	13.8	997	13.8	996	13.8
481.wrf	666	16.8	665	16.8	665	16.8	694	16.1	693	16.1	693	16.1
482.sphinx3	1058	18.4	1066	18.3	1077	18.1	1042	18.7	1037	18.8	1042	18.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Bios settings:

Hardware Prefetcher: Disabled

Adjacent Sector Prefetch: Disabled

High Bandwidth Option: Disabled

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode

Base Compiler Invocation

C benchmarks:

icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7210, 2.40 GHz)

SPECfp2006 = 18.6

SPECfp_base2006 = 16.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2007

Hardware Availability: Oct-2007

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -parallel

C++ benchmarks:

-fast -parallel

Fortran benchmarks:

-fast -parallel

Benchmarks using both Fortran and C:

-fast -parallel



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7210, 2.40 GHz)

SPECfp2006 = 18.6

SPECfp_base2006 = 16.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2007

Hardware Availability: Oct-2007

Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icpc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7210, 2.40 GHz)

SPECfp2006 = 18.6

SPECfp_base2006 = 16.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2007

Hardware Availability: Oct-2007

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.21.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.21.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7210, 2.40 GHz)

SPECfp2006 = 18.6

SPECfp_base2006 = 16.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2007

Hardware Availability: Oct-2007

Software Availability: Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:55:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 October 2007.