



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 15.6

ProLiant DL380 G5
(1.86 GHz, Intel Xeon processor 5120)

SPECint_base2006 = 13.3

CPU2006 license: 3


Test date: Sep-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

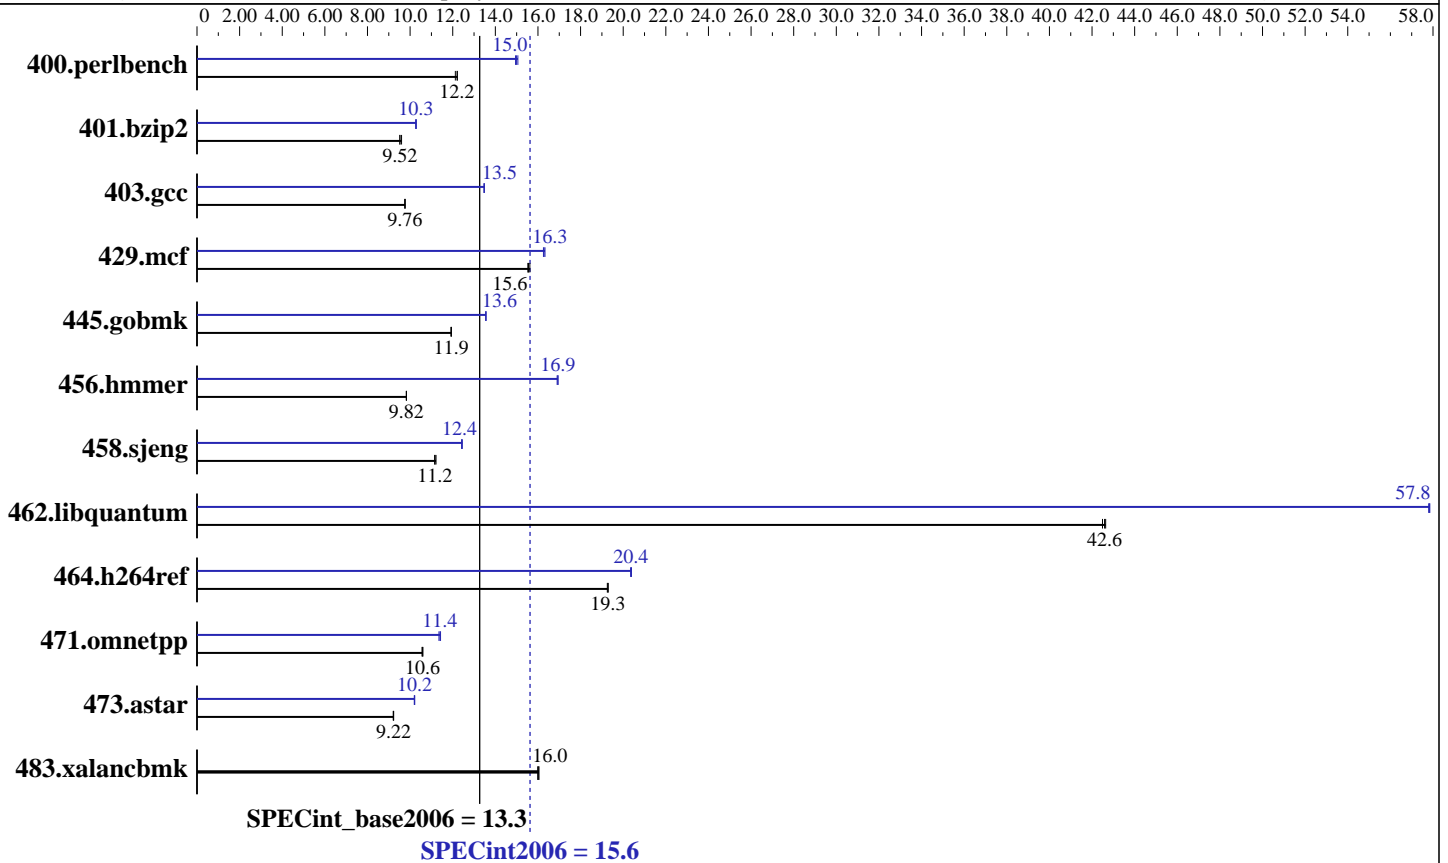

Hardware

CPU Name: Intel Xeon 5120
 CPU Characteristics: 1.86 GHz, 4 MB L2 shared, 1066 MHz system bus
 CPU MHz: 1866
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (8x1 GB PC2-5300F CL5)
 Disk Subsystem: 1x72 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1 kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1, Build 20070824
 Auto Parallel: Yes
 File System: ext2
 System State: Multi-user run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1 binutils-2.17.50



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G5
(1.86 GHz, Intel Xeon processor 5120)

SPECint2006 = **15.6**

SPECint_base2006 = **13.3**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Jun-2006

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	806	12.1	800	12.2	801	12.2	649	15.1	654	14.9	652	15.0
401.bzip2	1005	9.60	1013	9.52	1014	9.52	940	10.3	938	10.3	938	10.3
403.gcc	825	9.75	825	9.76	824	9.77	598	13.5	597	13.5	597	13.5
429.mcf	587	15.5	586	15.6	584	15.6	560	16.3	561	16.3	558	16.3
445.gobmk	879	11.9	880	11.9	879	11.9	774	13.6	774	13.6	774	13.6
456.hammer	949	9.83	950	9.82	950	9.82	552	16.9	551	16.9	551	16.9
458.sjeng	1079	11.2	1085	11.1	1083	11.2	974	12.4	972	12.4	974	12.4
462.libquantum	488	42.5	487	42.6	486	42.6	359	57.8	358	57.9	358	57.8
464.h264ref	1147	19.3	1149	19.3	1147	19.3	1088	20.3	1086	20.4	1085	20.4
471.omnetpp	590	10.6	590	10.6	592	10.6	548	11.4	547	11.4	550	11.4
473.astar	762	9.21	761	9.23	761	9.22	687	10.2	687	10.2	689	10.2
483.xalancbmk	430	16.0	432	16.0	431	16.0	430	16.0	432	16.0	431	16.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 15.6

ProLiant DL380 G5
(1.86 GHz, Intel Xeon processor 5120)

SPECint_base2006 = 13.3

CPU2006 license: 3

Test date: Sep-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -vec-guard-write -opt-malloc-options=3 -parallel
-par-runtime-control

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 15.6

ProLiant DL380 G5
(1.86 GHz, Intel Xeon processor 5120)

SPECint_base2006 = 13.3

CPU2006 license: 3

Test date: Sep-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmcr: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G5
(1.86 GHz, Intel Xeon processor 5120)

SPECint2006 = 15.6

SPECint_base2006 = 13.3

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Jun-2006

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:18:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 October 2007.