



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity rx2660 (1.66GHz/18MB Dual-Core Intel Itanium)

**SPECfp®2006 = 20.4**

**SPECfp\_base2006 = 19.9**

CPU2006 license: 03


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Nov-2007

Software Availability: Sep-2007

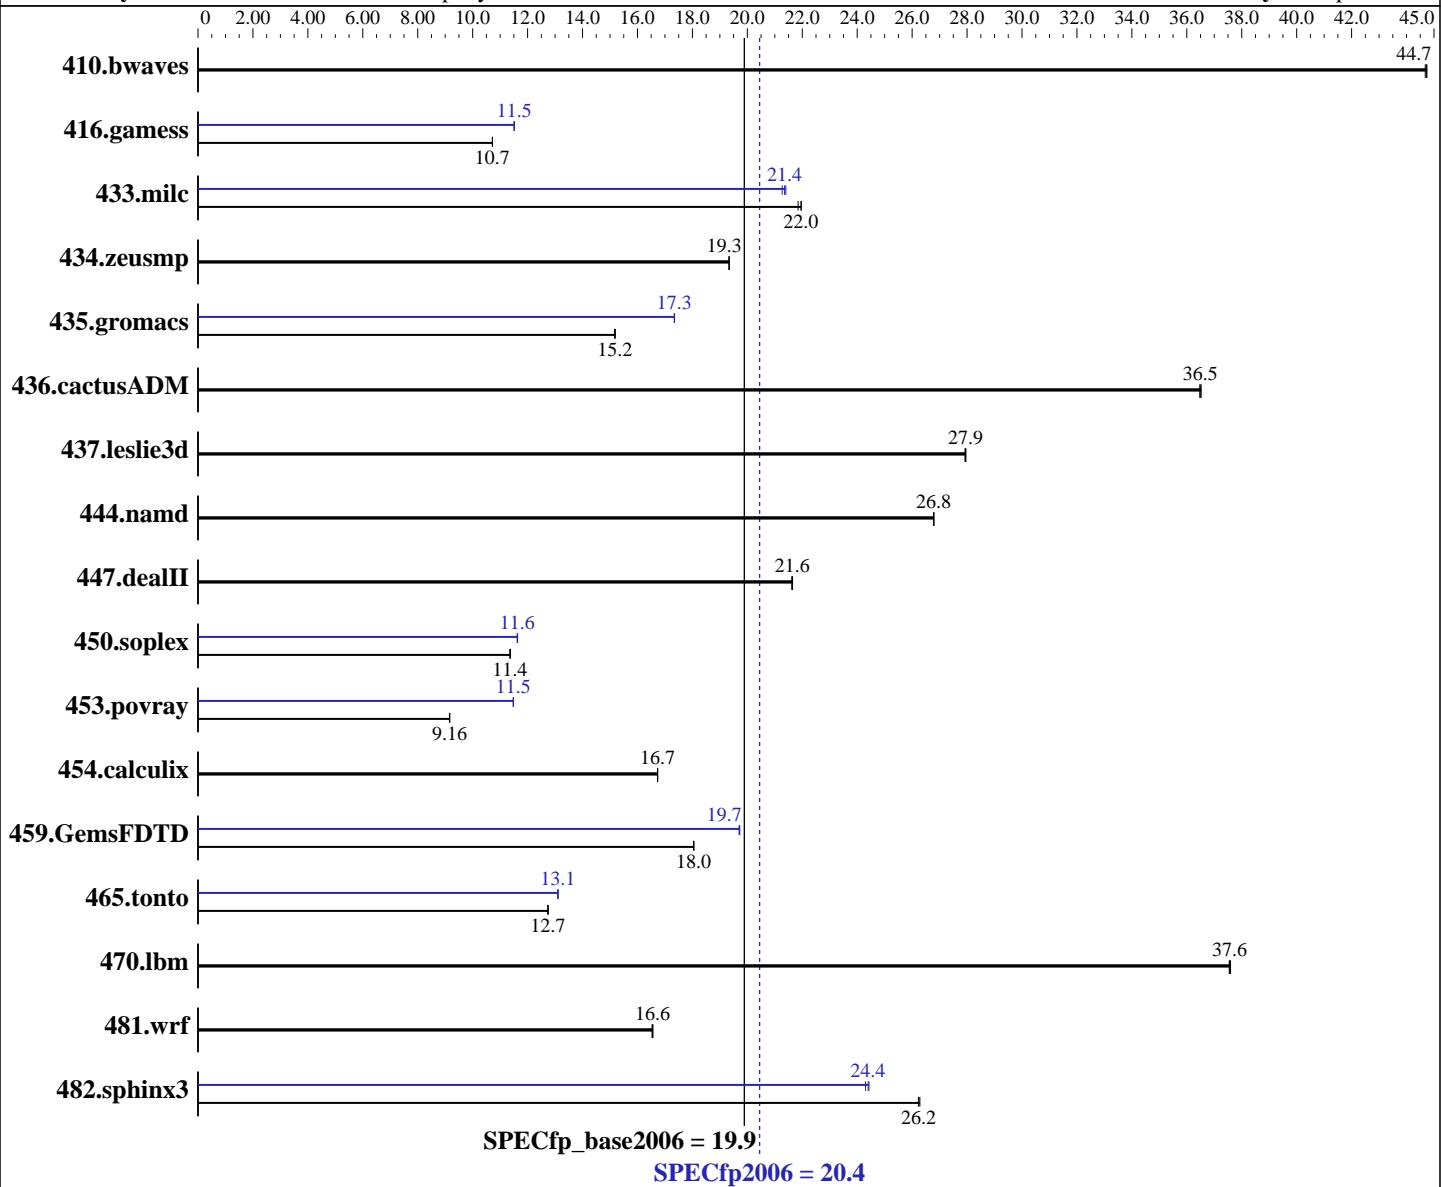

### Hardware

CPU Name: Dual-Core Intel Itanium 9140M  
 CPU Characteristics: 1.66GHz/18MB, 667MHz FSB  
 CPU MHz: 1666  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1-2 chips  
 Primary Cache: 16 KB I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I + 256 KB D on chip per core

### Software

Operating System: HPUX11i-MCOE B.11.31 (LR)  
 Compiler: HP C/aC++ Developer's Bundle C.11.31.03  
 HP Fortran90 Compiler B.11.31.03  
 Auto Parallel: No  
 File System: vxfs  
 System State: Multi-user  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill Smartheap 8.1

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity rx2660 (1.66GHz/18MB Dual-Core Intel Itanium)

**SPECfp2006 = 20.4**

**SPECfp\_base2006 = 19.9**

CPU2006 license: 03

Test date: Sep-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Sep-2007

L3 Cache: 9 MB I+D on chip per core  
 Other Cache: None  
 Memory: 16 GB (8x2GB DIMMs)  
 Disk Subsystem: 73GB 10K RPM SAS  
 Other Hardware: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	304	44.7	<b>304</b>	<b>44.7</b>	304	44.7	304	44.7	<b>304</b>	<b>44.7</b>	304	44.7
416.gamess	1826	10.7	<b>1826</b>	<b>10.7</b>	1827	10.7	1700	11.5	1701	11.5	<b>1701</b>	<b>11.5</b>
433.milc	420	21.8	<b>418</b>	<b>22.0</b>	418	22.0	429	21.4	<b>430</b>	<b>21.4</b>	432	21.3
434.zeusmp	471	19.3	471	19.3	<b>471</b>	<b>19.3</b>	471	19.3	471	19.3	<b>471</b>	<b>19.3</b>
435.gromacs	470	15.2	<b>470</b>	<b>15.2</b>	471	15.2	<b>412</b>	<b>17.3</b>	412	17.4	412	17.3
436.cactusADM	327	36.5	<b>328</b>	<b>36.5</b>	328	36.5	327	36.5	<b>328</b>	<b>36.5</b>	328	36.5
437.leslie3d	337	27.9	336	28.0	<b>336</b>	<b>27.9</b>	337	27.9	336	28.0	<b>336</b>	<b>27.9</b>
444.namd	<b>299</b>	<b>26.8</b>	299	26.8	299	26.8	<b>299</b>	<b>26.8</b>	299	26.8	299	26.8
447.dealII	529	21.6	528	21.6	<b>529</b>	<b>21.6</b>	529	21.6	528	21.6	<b>529</b>	<b>21.6</b>
450.soplex	734	11.4	<b>734</b>	<b>11.4</b>	733	11.4	<b>717</b>	<b>11.6</b>	717	11.6	<b>717</b>	11.6
453.povray	580	9.16	<b>581</b>	<b>9.16</b>	581	9.16	463	11.5	<b>463</b>	<b>11.5</b>	463	11.5
454.calculix	<b>493</b>	<b>16.7</b>	493	16.7	493	16.7	<b>493</b>	<b>16.7</b>	493	16.7	493	16.7
459.GemsFDTD	<b>588</b>	<b>18.0</b>	588	18.1	588	18.0	539	19.7	<b>538</b>	<b>19.7</b>	538	19.7
465.tonto	772	12.7	<b>772</b>	<b>12.7</b>	772	12.7	750	13.1	<b>751</b>	<b>13.1</b>	751	13.1
470.lbm	366	37.5	<b>366</b>	<b>37.6</b>	365	37.6	<b>366</b>	<b>37.5</b>	<b>366</b>	<b>37.6</b>	365	37.6
481.wrf	<b>675</b>	<b>16.6</b>	676	16.5	675	16.6	<b>675</b>	<b>16.6</b>	676	16.5	675	16.6
482.sphinx3	742	26.3	743	26.2	<b>743</b>	<b>26.2</b>	802	24.3	798	24.4	<b>799</b>	<b>24.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

The system had the September 2007 HP-UX 11i v3 Mission Critical Operating Environment (MCOE) and compilers installed, along with the following patches:

PHSS\_36349 linker + fdp cumulative patch  
 PHSS\_36351 Math Library Cumulative Patch  
 PHSS\_36352 Integrity Unwind Library  
 PHSS\_36350 aC++ Runtime (A.06.15)  
 PHSS\_36354 assembler patch

The following kernel tunables were set, in addition to the defaults set by the Mission Critical OE:

maxdsiz=3221225472

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity rx2660 (1.66GHz/18MB Dual-Core Intel Itanium)

**SPECfp2006 = 20.4**

**SPECfp\_base2006 = 19.9**

**CPU2006 license:** 03

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2007

**Hardware Availability:** Nov-2007

**Software Availability:** Sep-2007

## Operating System Notes (Continued)

maxssiz=401604608  
maxrsessiz=41943040

## Platform Notes

The "cpuconfig" EFI command was used prior to booting to deconfigure processors.

Although two cores were enabled during testing, the SPEC CPU2006 benchmarks used only one core.

The setboot command was used to disable hyperthreading.

## Base Compiler Invocation

C benchmarks:

/opt/ansic/bin/cc -Ae

C++ benchmarks:

/opt/aCC/bin/aCC -Aa

Fortran benchmarks:

/opt/fortran90/bin/f90

Benchmarks using both Fortran and C:

/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90

## Base Portability Flags

453.povray: -DSPEC\_CPU\_NEED\_INvhyp

481.wrf: -DNOUNDERSCORE +noppu

## Base Optimization Flags

C benchmarks:

+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M -Wl,-N

C++ benchmarks:

+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M -Wl,-N

Fortran benchmarks:

+Ofaster -Wl,-a,archive\_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity rx2660 (1.66GHz/18MB Dual-Core Intel Itanium)

**SPECfp2006 = 20.4**

**SPECfp\_base2006 = 19.9**

**CPU2006 license:** 03

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2007

**Hardware Availability:** Nov-2007

**Software Availability:** Sep-2007

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M  
-Wl,+pi,64M -Wl,-N
```

## Peak Compiler Invocation

C benchmarks:

```
/opt/ansic/bin/cc -Ae
```

C++ benchmarks:

```
/opt/aCC/bin/aCC -Aa
```

Fortran benchmarks:

```
/opt/fortran90/bin/f90
```

Benchmarks using both Fortran and C:

```
/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90
```

## Peak Portability Flags

453.povray: -DSPEC\_CPU\_NEED\_INVHYP  
481.wrf: -DNOUNDERSCORE +noppu

## Peak Optimization Flags

C benchmarks:

```
433.milc: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M  
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N
```

470.lbm: basepeak = yes

```
482.sphinx3: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M  
-Wl,+pi,64M +Onoparmsoverlap
```

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity rx2660 (1.66GHz/18MB Dual-Core Intel Itanium)

**SPECfp2006 = 20.4**

**SPECfp\_base2006 = 19.9**

**CPU2006 license:** 03

**Test date:** Sep-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2007

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2007

## Peak Optimization Flags (Continued)

450.soplex: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N

453.povray: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: +Ofaster -Wl,-a,archive\_shared -Wl,+pd,64M -Wl,+pi,64M  
+Odataprefetch=direct -Wl,-N

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
-Wl,-a,archive\_shared -Wl,+pd,64M -Wl,+pi,64M  
+Odataprefetch=direct -Wl,-N

465.tonto: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
-Wl,-a,archive\_shared -Wl,+pd,64M -Wl,+pi,64M  
+Odataprefetch=direct

Benchmarks using both Fortran and C:

435.gromacs: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M +Onoparmsoverlap

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.07.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.07.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.07.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.07.xml)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity rx2660 (1.66GHz/18MB Dual-Core Intel Itanium)

**SPECfp2006 =** 20.4

**SPECfp\_base2006 =** 19.9

**CPU2006 license:** 03

**Test date:** Sep-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2007

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.

Report generated on Tue Jul 22 14:19:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 November 2007.