



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx3600 (1.66GHz/18MB Dual-Core Intel Itanium)

SPECfp®2006 = 20.2

SPECfp_base2006 = 19.6

CPU2006 license: 03


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Nov-2007

Software Availability: Sep-2007

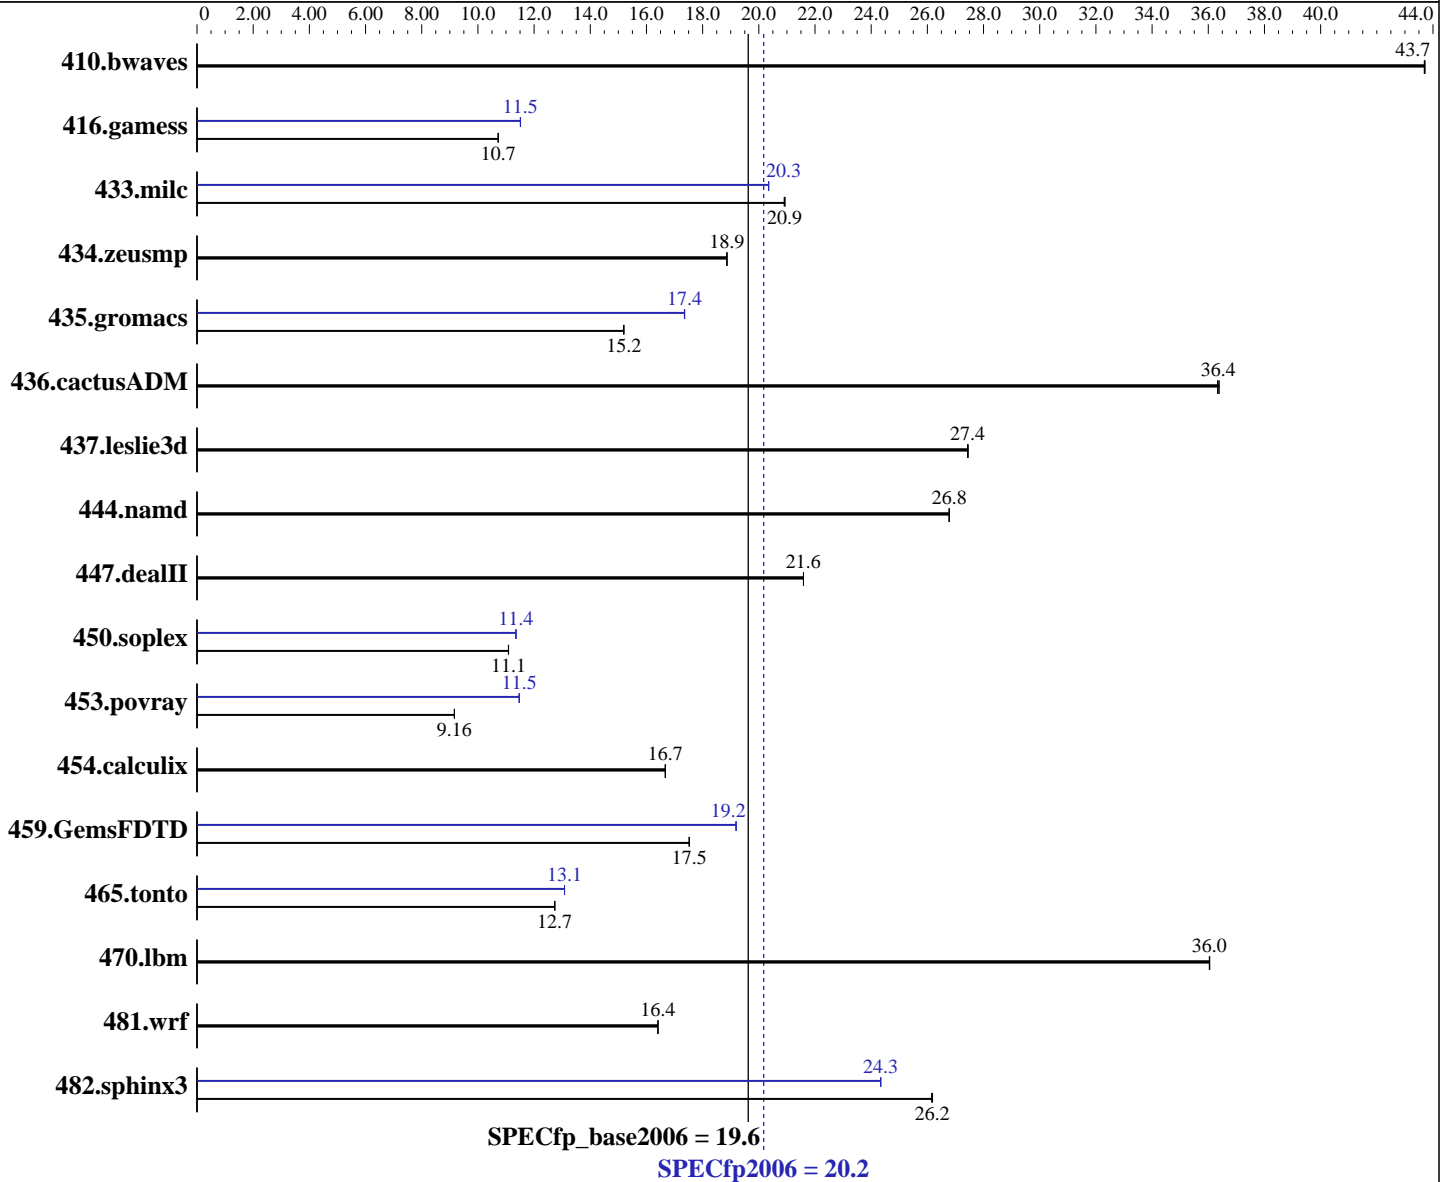

Hardware

CPU Name: Dual-Core Intel Itanium 9140M
 CPU Characteristics: 1.66GHz/18MB, 667MHz FSB
 CPU MHz: 1666
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1-2 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core

Software

Operating System: HPUX11i-MCOE B.11.31 (LR)
 Compiler: HP C/aC++ Developer's Bundle C.11.31.03
 HP Fortran90 Compiler B.11.31.03
 Auto Parallel: No
 File System: vxfs
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill Smartheap 8.1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx3600 (1.66GHz/18MB Dual-Core Intel Itanium)

SPECfp2006 = 20.2

SPECfp_base2006 = 19.6

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Nov-2007

Software Availability: Sep-2007

L3 Cache: 9 MB I+D on chip per core
Other Cache: None
Memory: 16 GB (8x2GB DIMMs, AD124A 8-DIMM memory carrier)
Disk Subsystem: 73GB 10K RPM SAS
Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	311	43.7	311	43.7	311	43.7	311	43.7	311	43.7	311	43.7
416.gamess	1826	10.7	1826	10.7	1826	10.7	1700	11.5	1701	11.5	1701	11.5
433.milc	439	20.9	439	20.9	439	20.9	451	20.3	451	20.4	451	20.3
434.zeusmp	482	18.9	482	18.9	483	18.9	482	18.9	482	18.9	483	18.9
435.gromacs	470	15.2	470	15.2	470	15.2	411	17.4	412	17.4	411	17.4
436.cactusADM	329	36.3	328	36.4	329	36.4	329	36.3	328	36.4	329	36.4
437.leslie3d	343	27.4	342	27.5	343	27.4	343	27.4	342	27.5	343	27.4
444.namd	300	26.8	299	26.8	300	26.8	300	26.8	299	26.8	300	26.8
447.dealII	530	21.6	530	21.6	530	21.6	530	21.6	530	21.6	530	21.6
450.soplex	752	11.1	752	11.1	752	11.1	734	11.4	734	11.4	735	11.4
453.povray	581	9.16	581	9.16	581	9.16	464	11.5	464	11.5	464	11.5
454.calculix	495	16.7	495	16.7	495	16.7	495	16.7	495	16.7	495	16.7
459.GemsFDTD	605	17.5	605	17.5	606	17.5	553	19.2	553	19.2	553	19.2
465.tonto	773	12.7	772	12.7	773	12.7	752	13.1	752	13.1	752	13.1
470.lbm	381	36.1	381	36.0	381	36.0	381	36.1	381	36.0	381	36.0
481.wrf	681	16.4	681	16.4	681	16.4	681	16.4	681	16.4	681	16.4
482.sphinx3	745	26.2	744	26.2	744	26.2	801	24.3	801	24.3	801	24.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

The system had the September 2007 HP-UX 11i v3 Mission Critical Operating Environment (MCOE) and compilers installed, along with the following patches:

```
PHSS_36349 linker + fdp cumulative patch
PHSS_36351 Math Library Cumulative Patch
PHSS_36352 Integrity Unwind Library
PHSS_36350 aC++ Runtime (A.06.15)
PHSS_36354 assembler patch
```

The following kernel tunables were set, in addition to the defaults set by the Mission Critical OE:

```
maxdsiz=3221225472
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx3600 (1.66GHz/18MB Dual-Core Intel Itanium)

SPECfp2006 = 20.2

SPECfp_base2006 = 19.6

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Nov-2007

Software Availability: Sep-2007

Operating System Notes (Continued)

maxssiz=401604608
maxrsessiz=41943040

Platform Notes

The "cpuconfig" EFI command was used prior to booting to deconfigure processors.

Although two cores were enabled during testing, the SPEC CPU2006 benchmarks used only one core.

The setboot command was used to disable hyperthreading.

Base Compiler Invocation

C benchmarks:

/opt/ansic/bin/cc -Ae

C++ benchmarks:

/opt/aCC/bin/aCC -Aa

Fortran benchmarks:

/opt/fortran90/bin/f90

Benchmarks using both Fortran and C:

/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90

Base Portability Flags

453.povray: -DSPEC_CPU_NEED_INVHYP

481.wrf: -DNOUNDERSCORE +noppu

Base Optimization Flags

C benchmarks:

+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

C++ benchmarks:

+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

Fortran benchmarks:

+Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx3600 (1.66GHz/18MB Dual-Core Intel Itanium)

SPECfp2006 = 20.2

SPECfp_base2006 = 19.6

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Nov-2007

Software Availability: Sep-2007

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

Peak Compiler Invocation

C benchmarks:

/opt/ansic/bin/cc -Ae

C++ benchmarks:

/opt/aCC/bin/aCC -Aa

Fortran benchmarks:

/opt/fortran90/bin/f90

Benchmarks using both Fortran and C:

/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90

Peak Portability Flags

453.povray: -DSPEC_CPU_NEED_INVHYP

481.wrf: -DNOUNDERSCORE +noppu

Peak Optimization Flags

C benchmarks:

433.milc: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N

470.lbm: basepeak = yes

482.sphinx3: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx3600 (1.66GHz/18MB Dual-Core Intel Itanium)

SPECfp2006 = 20.2

SPECfp_base2006 = 19.6

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Nov-2007

Software Availability: Sep-2007

Peak Optimization Flags (Continued)

450.soplex: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N

453.povray: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: +Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct -Wl,-N

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
-Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct -Wl,-N

465.tonto: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
-Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct

Benchmarks using both Fortran and C:

435.gromacs: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.07.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.07.xml



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx3600 (1.66GHz/18MB Dual-Core Intel Itanium)

SPECfp2006 = 20.2

SPECfp_base2006 = 19.6

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Nov-2007

Software Availability: Sep-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 14:19:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 November 2007.