



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 20.5

IBM BladeCenter HS21 (Intel Xeon X5365)

SPECfp_base2006 = 17.6

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2007

Hardware Availability: Sep-2007

Software Availability: Nov-2007

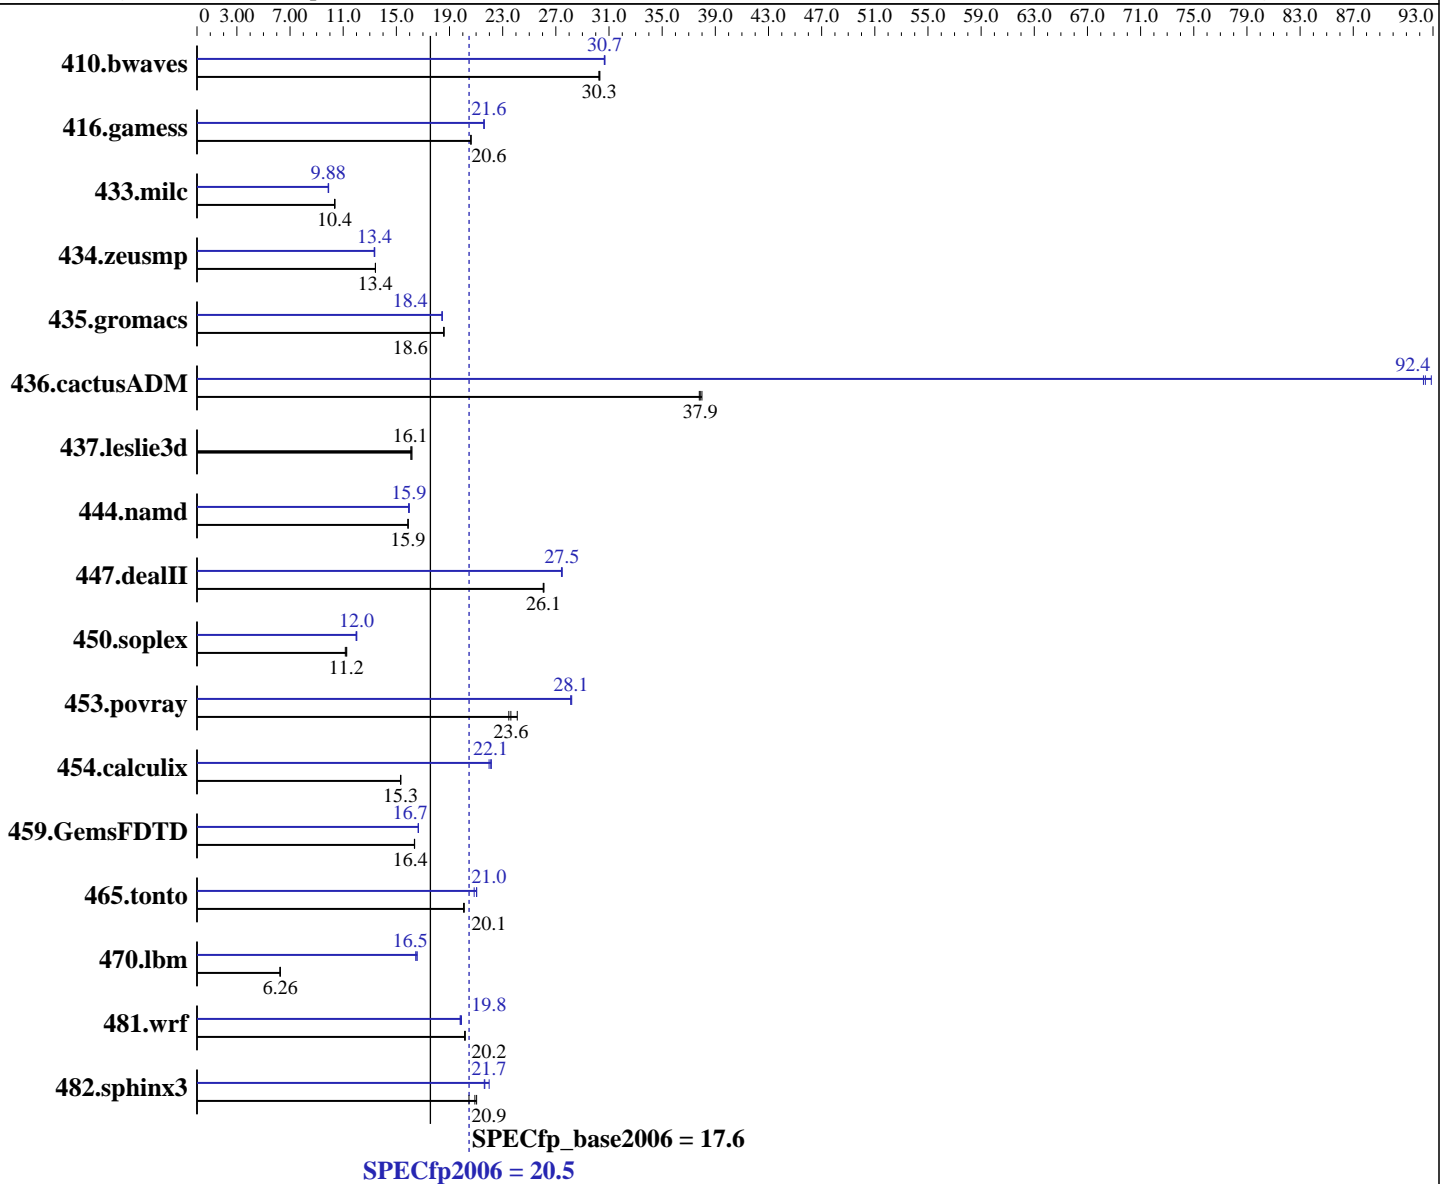

Hardware

CPU Name: Intel Xeon X5365
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: SLES 10 (x86_64), 2.6.16.21-0.8-smp
 Compiler: Intel C++ and Fortran Compiler for Linux version 10.1
 Build 20070824
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 20.5

IBM BladeCenter HS21 (Intel Xeon X5365)

SPECfp_base2006 = 17.6

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem: 1 x 36 GB SAS, 10000 RPM
Other Hardware: Memory and I/O Expansion Unit (P/N 42C1600)

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	449	30.2	448	30.3	449	30.3	443	30.7	443	30.6	443	30.7
416.gamess	950	20.6	950	20.6	950	20.6	906	21.6	907	21.6	907	21.6
433.milc	884	10.4	887	10.3	887	10.4	929	9.88	929	9.88	927	9.91
434.zeusmp	678	13.4	678	13.4	678	13.4	681	13.4	681	13.4	683	13.3
435.gromacs	385	18.6	384	18.6	384	18.6	387	18.5	387	18.4	387	18.4
436.cactusADM	316	37.8	315	38.0	316	37.9	129	92.3	129	92.9	129	92.4
437.leslie3d	584	16.1	581	16.2	583	16.1	584	16.1	581	16.2	583	16.1
444.namd	505	15.9	505	15.9	505	15.9	502	16.0	504	15.9	503	15.9
447.dealII	439	26.0	438	26.1	438	26.1	417	27.5	416	27.5	417	27.4
450.soplex	740	11.3	747	11.2	743	11.2	697	12.0	693	12.0	695	12.0
453.povray	225	23.6	227	23.5	221	24.1	189	28.1	189	28.1	189	28.2
454.calculix	538	15.3	539	15.3	538	15.3	373	22.1	372	22.1	375	22.0
459.GemsFDTD	648	16.4	649	16.4	648	16.4	637	16.7	637	16.7	637	16.7
465.tonto	490	20.1	490	20.1	489	20.1	472	20.9	468	21.0	468	21.0
470.lbm	2191	6.27	2201	6.24	2195	6.26	834	16.5	834	16.5	829	16.6
481.wrf	555	20.1	554	20.2	554	20.2	561	19.9	563	19.8	564	19.8
482.sphinx3	952	20.5	926	21.0	932	20.9	887	22.0	900	21.7	902	21.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 20.5

IBM BladeCenter HS21 (Intel Xeon X5365)

SPECfp_base2006 = 17.6

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -parallel

C++ benchmarks:

-fast -parallel

Fortran benchmarks:

-fast -parallel

Benchmarks using both Fortran and C:

-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):

/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 20.5

IBM BladeCenter HS21 (Intel Xeon X5365)

SPECfp_base2006 = 17.6

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Compiler Invocation (Continued)

C benchmarks (except as noted below) (continued):

-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icpc

-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib

-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -nofor_main

459.GemsFDTD: -DSPEC_CPU_LP64

465.tonto: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 20.5

IBM BladeCenter HS21 (Intel Xeon X5365)

SPECfp_base2006 = 17.6

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 20.5

IBM BladeCenter HS21 (Intel Xeon X5365)

SPECfp_base2006 = 17.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2007

Hardware Availability: Sep-2007

Software Availability: Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:45:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 November 2007.