



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon processor E5345)

SPECint®2006 = 16.9

SPECint_base2006 = 15.4

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2007

Hardware Availability: Jan-2007

Software Availability: Jun-2007

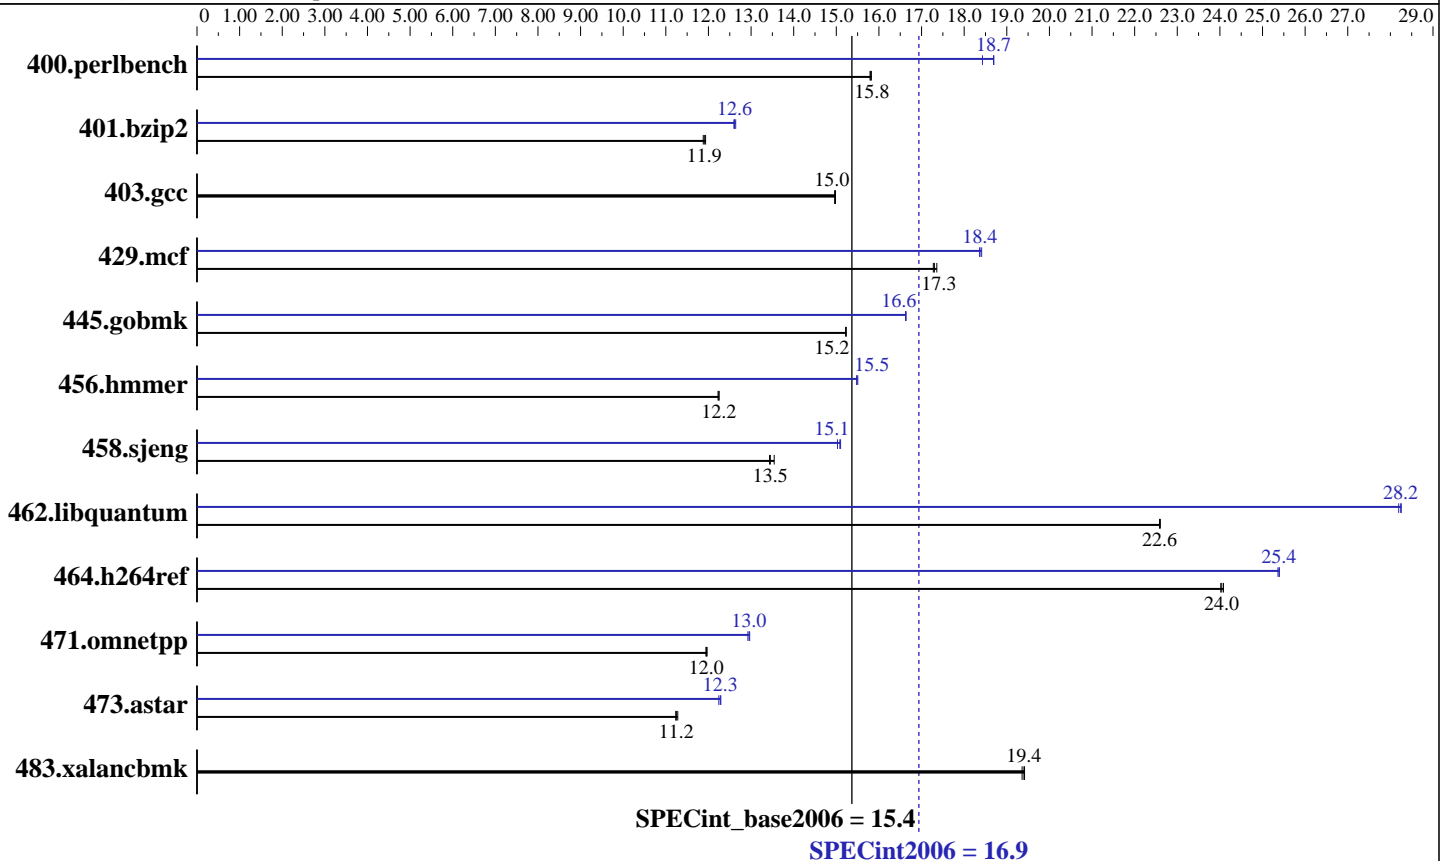

Hardware

CPU Name: Intel Xeon E5345
 CPU Characteristics: 2.33 GHz, 2x4 MB L2 shared, 1333 MHz bus
 CPU MHz: 2333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x146.5 GB SAS, 10000RPM
 Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp for x86_64
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 10.0 - Build 20070426 Package ID: l_cc_p_10.0.023
 Auto Parallel: No
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon processor E5345)

SPECint2006 = 16.9

SPECint_base2006 = 15.4

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2007

Hardware Availability: Jan-2007

Software Availability: Jun-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	618	15.8	619	15.8	617	15.8	530	18.4	523	18.7	523	18.7
401.bzip2	809	11.9	811	11.9	812	11.9	766	12.6	763	12.6	765	12.6
403.gcc	538	15.0	537	15.0	538	15.0	538	15.0	537	15.0	538	15.0
429.mcf	527	17.3	528	17.3	525	17.4	497	18.4	495	18.4	496	18.4
445.gobmk	689	15.2	689	15.2	689	15.2	631	16.6	631	16.6	631	16.6
456.hmmer	763	12.2	762	12.2	762	12.2	603	15.5	603	15.5	602	15.5
458.sjeng	893	13.5	901	13.4	899	13.5	801	15.1	805	15.0	802	15.1
462.libquantum	917	22.6	917	22.6	917	22.6	734	28.2	735	28.2	733	28.3
464.h264ref	919	24.1	920	24.0	921	24.0	871	25.4	873	25.4	872	25.4
471.omnetpp	523	11.9	522	12.0	523	12.0	484	12.9	482	13.0	482	13.0
473.astar	624	11.2	625	11.2	622	11.3	572	12.3	573	12.2	571	12.3
483.xalancbmk	356	19.4	356	19.4	355	19.4	356	19.4	356	19.4	355	19.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon processor E5345)

SPECint2006 = 16.9

SPECint_base2006 = 15.4

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2007

Hardware Availability: Jan-2007

Software Availability: Jun-2007

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include

456.hmmer: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon processor E5345)

SPECint2006 = 16.9

SPECint_base2006 = 15.4

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2007

Hardware Availability: Jan-2007

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast

403.gcc: basepeak = yes

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec_div -ansi-alias

456.hmmer: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -Ob0
-prefetch -opt-streaming-stores always

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec_div -ansi-alias -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmarheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-ic10-INT-ia32-intel64-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-ic10-INT-ia32-intel64-linux-flags.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon processor E5345)

SPECint2006 = 16.9

SPECint_base2006 = 15.4

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2007

Hardware Availability: Jan-2007

Software Availability: Jun-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:29:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.