



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®2006 = 23.0

Asus P5E3 Deluxe (Intel Core 2 Duo E6850)

SPECint\_base2006 = 21.3

CPU2006 license: 13


Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

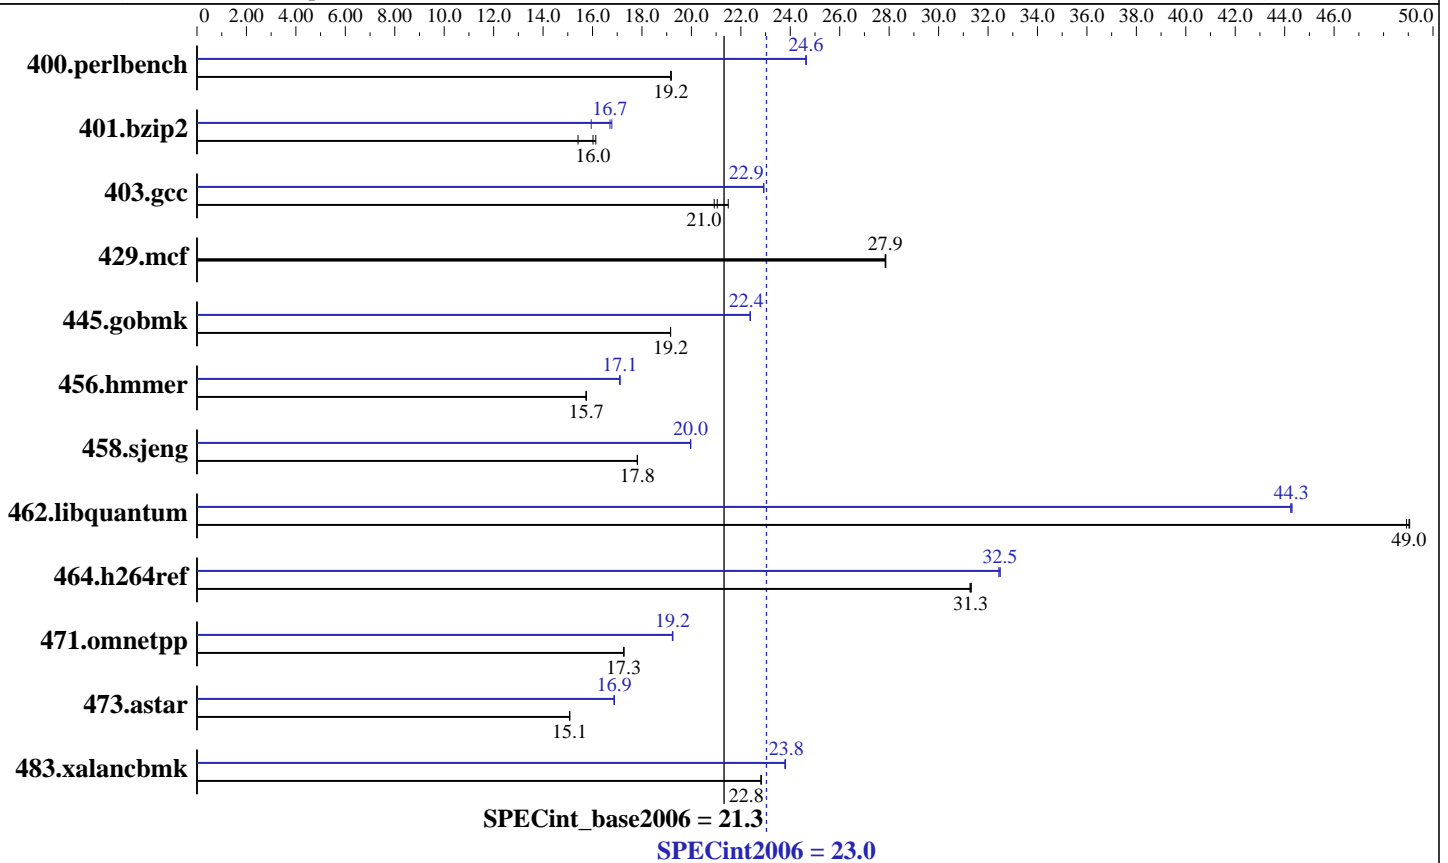

## Hardware

CPU Name: Intel Core 2 Duo E6850  
 CPU Characteristics: 3.00 GHz 1333 MHz FSB  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 2 GB (2x1GB Corsair TWIN3X2048-1333C9DHX DDR3-1333 CL9)  
 Disk Subsystem: Seagate 320GB NCQ SATA, 16MB cache, 7200 RPM  
 Other Hardware: None

## Software

Operating System: Windows Vista64 Ultimate  
 Compiler: Intel C++ Compiler for IA32 version 10.1  
 Build 20070913 Package ID: w\_cc\_p\_10.1.011  
 Microsoft Visual Studio 2005 SP1 (for libraries)  
 Auto Parallel: Yes  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.0

Asus P5E3 Deluxe (Intel Core 2 Duo E6850)

SPECint\_base2006 = 21.3

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	510	19.2	509	19.2	<u>509</u>	<u>19.2</u>	397	24.6	396	24.6	<u>396</u>	<u>24.6</u>
401.bzip2	<u>602</u>	<u>16.0</u>	626	15.4	598	16.1	605	15.9	<u>578</u>	<u>16.7</u>	575	16.8
403.gcc	<u>382</u>	<u>21.0</u>	375	21.5	385	20.9	351	22.9	<u>351</u>	<u>22.9</u>	351	22.9
429.mcf	328	27.8	327	27.9	<u>327</u>	<u>27.9</u>	328	27.8	327	27.9	<u>327</u>	<u>27.9</u>
445.gobmk	548	19.2	<u>548</u>	<u>19.2</u>	548	19.2	469	22.4	<u>469</u>	<u>22.4</u>	469	22.4
456.hammer	<u>593</u>	<u>15.7</u>	592	15.8	593	15.7	545	17.1	<u>545</u>	<u>17.1</u>	545	17.1
458.sjeng	679	17.8	679	17.8	<u>679</u>	<u>17.8</u>	606	20.0	606	20.0	<u>606</u>	<u>20.0</u>
462.libquantum	422	49.1	423	48.9	<u>423</u>	<u>49.0</u>	468	44.2	468	44.3	<u>468</u>	<u>44.3</u>
464.h264ref	708	31.3	<u>707</u>	<u>31.3</u>	707	31.3	682	32.4	<u>681</u>	<u>32.5</u>	681	32.5
471.omnetpp	362	17.3	362	17.3	<u>362</u>	<u>17.3</u>	325	19.2	325	19.2	<u>325</u>	<u>19.2</u>
473.astar	466	15.1	466	15.1	<u>466</u>	<u>15.1</u>	416	16.9	<u>416</u>	<u>16.9</u>	416	16.9
483.xalancbmk	<u>302</u>	<u>22.8</u>	302	22.8	302	22.8	290	23.8	290	23.8	<u>290</u>	<u>23.8</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply  
Product description located as of 11/2007:

<http://www.asus.com/products.aspx?l1=3&l2=11&l3=572&l4=0&model=1872&modelmenu=1>

The system bus runs at 1333 MHz

System was configured with Asus EN8800GTX discrete graphics card

Binaries were built on Windows Vista32

The following VS 2005 SP1 updates were applied: KB926601 and KB932232

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc8 -Qc99
```

C++ benchmarks:

```
icl -Qvc8
```

## Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.0

Asus P5E3 Deluxe (Intel Core 2 Duo E6850)

SPECint\_base2006 = 21.3

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

## Base Optimization Flags

C benchmarks:

-fast -Qparallel -Qpar-runtime-control -Qvec-guard-write /F512000000  
libguide40.lib

C++ benchmarks:

-fast -Qcxx\_features /F512000000 shlw32m.lib libguide40.lib  
-link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:

icl -Qvc8 -Qc99

C++ benchmarks:

icl -Qvc8

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qprefetch -Qparallel -Qpar-runtime-control /F512000000  
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

401.bzip2: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qprefetch  
/F512000000 libguide40.lib

403.gcc: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F512000000  
libguide40.lib

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.0

Asus P5E3 Deluxe (Intel Core 2 Duo E6850)

SPECint\_base2006 = 21.3

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -QxT -O2 -Qipo  
-Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll2  
-Qansi-alias -Qopt-multi-version-aggressive /F512000000  
libguide40.lib

458.sjeng: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll4  
/F512000000 libguide40.lib

462.libquantum: -fast -Qunroll4 -Ob0 -Qprefetch  
-Qopt-streaming-stores:always -Qparallel  
-Qpar-runtime-control /F512000000 libguide40.lib

464.h264ref: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll2  
-Qansi-alias /F512000000 libguide40.lib

C++ benchmarks:

471.omnetpp: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qopt-ra-region-strategy=block -Qcxx\_features /F512000000  
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

473.astar: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qopt-ra-region-strategy=routine -Qcxx\_features /F512000000  
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

483.xalancbmk: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qcxx\_features /F512000000 shlw32m.lib libguide40.lib  
-link /FORCE:MULTIPLE

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.09.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.09.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.0

Asus P5E3 Deluxe (Intel Core 2 Duo E6850)

SPECint\_base2006 = 21.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 14:34:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 November 2007.