



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo Q9550)

SPECfp®2006 = 20.0

SPECfp\_base2006 = 19.4

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Feb-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

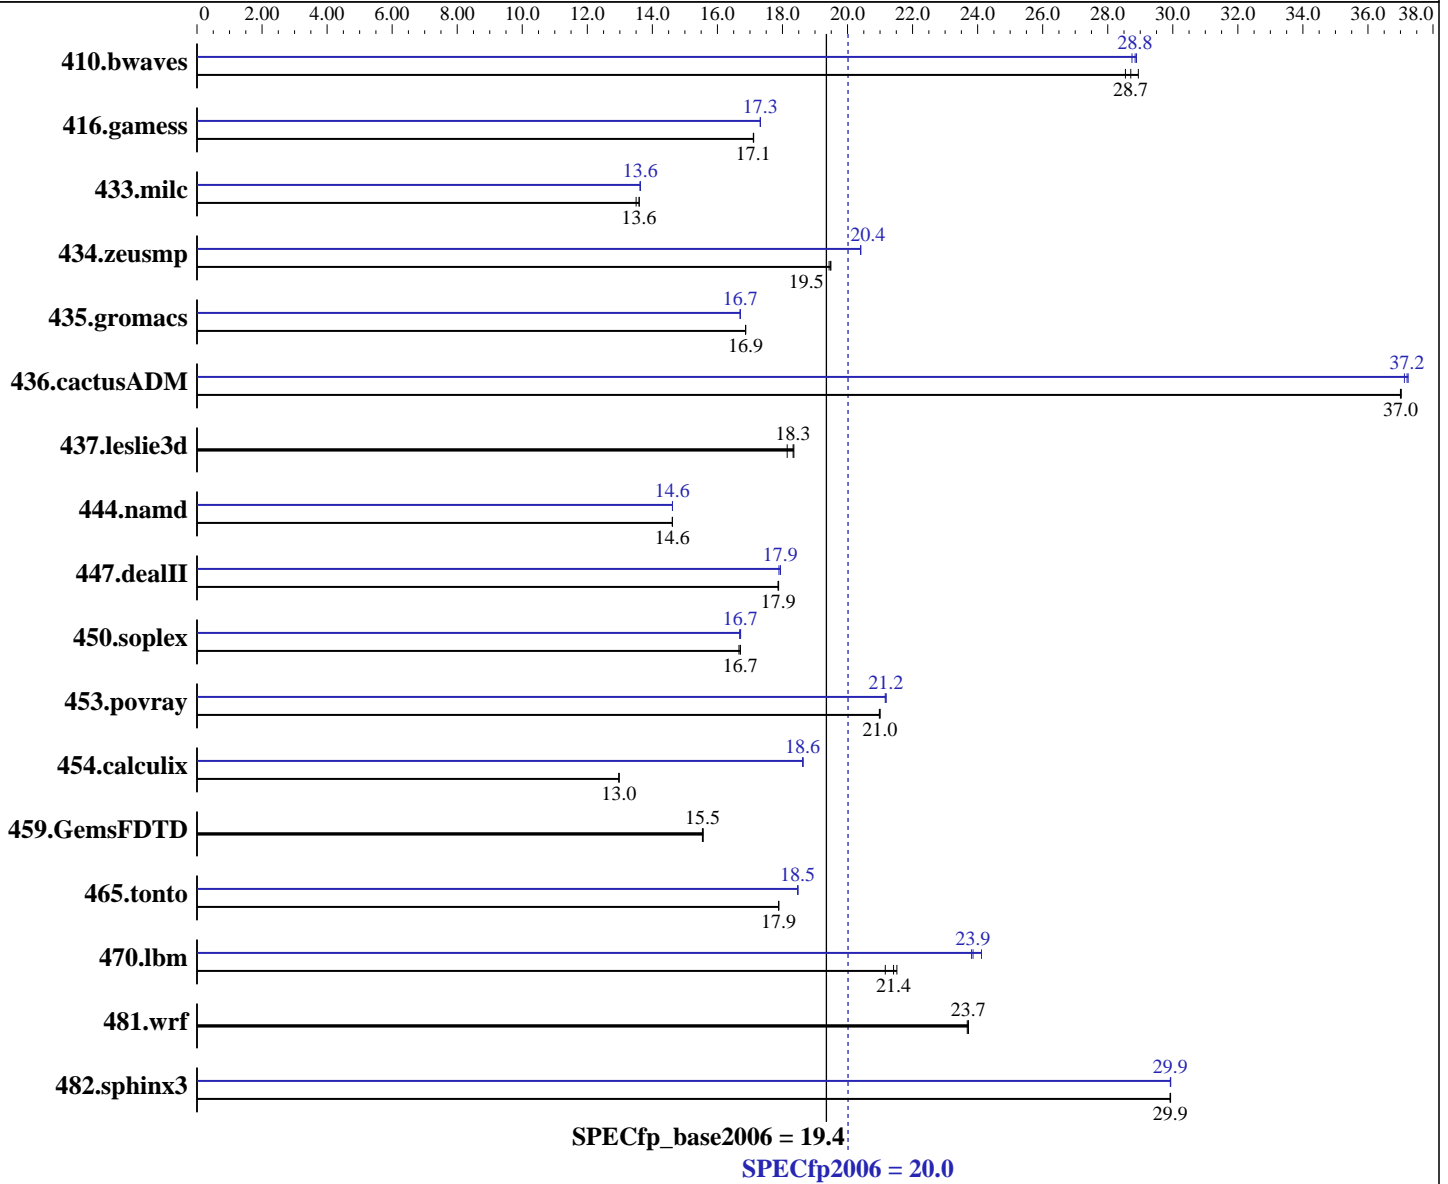

**Hardware**

CPU Name: Intel Core 2 Quad Q9550  
 CPU Characteristics: 2.83 GHz, 1333 FSB  
 CPU MHz: 2833  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

**Software**

Operating System: Windows Vista Ultimate (64-bit)  
 Compiler: Intel C++ Compiler for IA32 version 10.1  
 Build 20070913 Package ID: w\_cc\_p\_10.1.011  
 Intel Fortran Compiler for IA32 version 10.1  
 Build 20070913 Package ID: w\_fc\_p\_10.1.011  
 Microsoft Visual Studio 2005 SP1 (for libraries)

Auto Parallel: Yes  
 File System: NTFS  
 System State: Default

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo Q9550)

SPECfp2006 = **20.0**

SPECfp\_base2006 = **19.4**

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Feb-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 4 GB (4x1GB Micron DDR2-800 CL5)  
Disk Subsystem: Seagate 320GB NCQ SATA, 16MB cache, 7200 RPM  
Other Hardware: None

Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	476	28.5	<b>473</b>	<b>28.7</b>	470	28.9	471	28.9	473	28.7	<b>471</b>	<b>28.8</b>
416.gamess	1145	17.1	1144	17.1	<b>1144</b>	<b>17.1</b>	1131	17.3	<b>1131</b>	<b>17.3</b>	1130	17.3
433.milc	680	13.5	<b>675</b>	<b>13.6</b>	675	13.6	<b>674</b>	<b>13.6</b>	674	13.6	673	13.6
434.zeusmp	468	19.4	<b>467</b>	<b>19.5</b>	467	19.5	<b>446</b>	<b>20.4</b>	446	20.4	446	20.4
435.gromacs	<b>423</b>	<b>16.9</b>	423	16.9	423	16.9	<b>428</b>	<b>16.7</b>	428	16.7	427	16.7
436.cactusADM	<b>323</b>	<b>37.0</b>	323	37.0	323	37.0	321	37.2	<b>321</b>	<b>37.2</b>	322	37.1
437.leslie3d	518	18.1	512	18.4	<b>513</b>	<b>18.3</b>	518	18.1	512	18.4	<b>513</b>	<b>18.3</b>
444.namd	<b>549</b>	<b>14.6</b>	549	14.6	549	14.6	<b>549</b>	<b>14.6</b>	549	14.6	549	14.6
447.dealII	640	17.9	640	17.9	<b>640</b>	<b>17.9</b>	639	17.9	<b>638</b>	<b>17.9</b>	638	17.9
450.soplex	501	16.7	499	16.7	<b>499</b>	<b>16.7</b>	500	16.7	<b>499</b>	<b>16.7</b>	499	16.7
453.povray	254	21.0	<b>253</b>	<b>21.0</b>	253	21.0	251	21.2	251	21.2	<b>251</b>	<b>21.2</b>
454.calculix	636	13.0	636	13.0	<b>636</b>	<b>13.0</b>	443	18.6	443	18.6	<b>443</b>	<b>18.6</b>
459.GemsFDTD	<b>682</b>	<b>15.5</b>	683	15.5	682	15.6	<b>682</b>	<b>15.5</b>	683	15.5	682	15.6
465.tonto	550	17.9	550	17.9	<b>550</b>	<b>17.9</b>	533	18.5	533	18.5	<b>533</b>	<b>18.5</b>
470.lbm	649	21.2	<b>642</b>	<b>21.4</b>	639	21.5	<b>576</b>	<b>23.9</b>	577	23.8	570	24.1
481.wrf	471	23.7	472	23.7	<b>471</b>	<b>23.7</b>	471	23.7	472	23.7	<b>471</b>	<b>23.7</b>
482.sphinx3	651	29.9	<b>651</b>	<b>29.9</b>	651	29.9	651	29.9	<b>651</b>	<b>29.9</b>	651	29.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply  
Product description located as of 03/2008:

<http://www.intel.com/products/motherboard/DQ35JO/index.htm>

The system bus runs at 1333 MHz

System was configured with Asus EN8800GTX discrete graphics card

Binaries were built on Windows Vista Ultimate (32-bit)

The following VS 2005 SP1 updates were applied: KB926601 and KB932232

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc8 -Qc99
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Intel Corporation**

Intel Desktop Board DQ35JO (Intel Core 2 Duo Q9550)

**SPECfp2006 = 20.0**

**SPECfp\_base2006 = 19.4**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Feb-2008

**Hardware Availability:** Mar-2008

**Software Availability:** Nov-2007

## Base Compiler Invocation (Continued)

C++ benchmarks:

icl -Qvc8

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc8 -Qc99 ifort

## Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Base Optimization Flags

C benchmarks:

-fast -Qparallel /F1000000000 libguide40.lib

C++ benchmarks:

-fast -Qparallel -Qcxx\_features /F1000000000 shlw32m.lib  
libguide40.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

-fast -Qparallel /F1000000000 libguide40.lib

Benchmarks using both Fortran and C:

-fast -Qparallel /F1000000000 libguide40.lib

## Peak Compiler Invocation

C benchmarks:

icl -Qvc8 -Qc99

C++ benchmarks:

icl -Qvc8

Fortran benchmarks:

ifort

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Intel Corporation**

Intel Desktop Board DQ35JO (Intel Core 2 Duo Q9550)

**SPECfp2006 = 20.0**

**SPECfp\_base2006 = 19.4**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Feb-2008

**Hardware Availability:** Mar-2008

**Software Availability:** Nov-2007

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icl -Qvc8 -Qc99 ifort

## Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Peak Optimization Flags

C benchmarks:

433.milc: -fast -Qunroll2 -Oa /F1000000000 libguide40.lib

470.lbm: -fast -Qunroll2 -Qscalar-rep- -Qprefetch /F1000000000  
libguide40.lib

482.sphinx3: -fast -Qunroll2 /F1000000000 libguide40.lib

C++ benchmarks:

444.namd: -fast -Oa -Qcxx\_features /F1000000000 shlw32m.lib  
libguide40.lib -link /FORCE:MULTIPLE

447.dealII: -fast -Qunroll2 -Qprefetch -Qcxx\_features /F1000000000  
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

450.soplex: -fast -Qparallel -Qcxx\_features /F1000000000 shlw32m.lib  
libguide40.lib -link /FORCE:MULTIPLE

453.povray: -fast -Qunroll14 -Qcxx\_features /F1000000000 shlw32m.lib  
libguide40.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: -fast -Qparallel -Qprefetch /F1000000000 libguide40.lib

416.gamess: -fast -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep-  
/F1000000000 libguide40.lib

434.zeusmp: -QxT -O2 -Qprec-div- -Qunroll10 -Qscalar-rep- /F1000000000  
libguide40.lib

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo Q9550)

**SPECfp2006 = 20.0**

**SPECfp\_base2006 = 19.4**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Feb-2008

**Hardware Availability:** Mar-2008

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -fast -Qunroll4 -Qauto /F1000000000 libguide40.lib

Benchmarks using both Fortran and C:

435.gromacs: -fast -Oa -Qprefetch /F1000000000 libguide40.lib

436.cactusADM: -fast -Qunroll2 -Qparallel -Qprefetch /F1000000000  
libguide40.lib

454.calculix: -fast -Qunroll-aggressive /F1000000000 libguide40.lib

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-win32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-win32-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 15:33:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 March 2008.