



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/140Ba-10  
(Intel Xeon E7340)

SPECfp<sup>®</sup>2006 = 18.6

SPECfp\_base2006 = 16.3

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2008

Hardware Availability: Sep-2007

Software Availability: Nov-2007

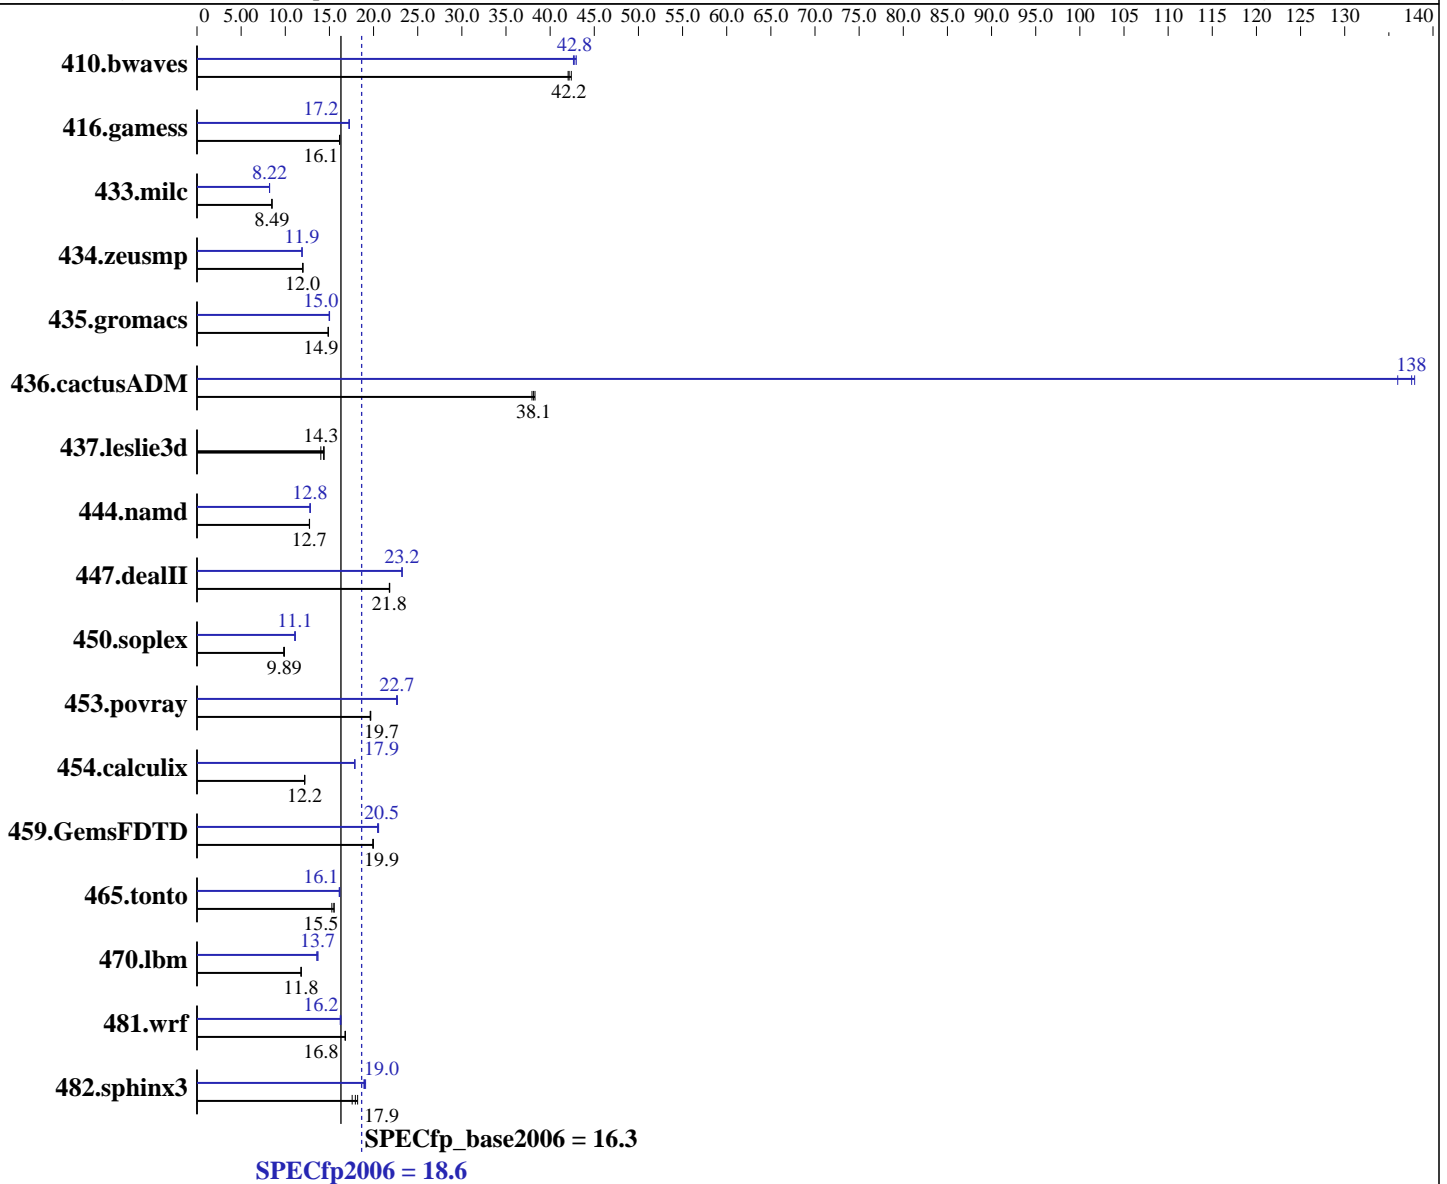

### Hardware

CPU Name: Intel Xeon E7340  
 CPU Characteristics: 2.40 GHz, 2x4 MB L2 shared, 1066 MHz bus  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 1,2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smpp  
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l\_cc\_p\_10.1.008, l\_fc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ext2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/140Ba-10  
(Intel Xeon E7340)

SPECfp2006 = 18.6

SPECfp\_base2006 = 16.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2008

Hardware Availability: Sep-2007

Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (16x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
Disk Subsystem: 1x73.2 GB SAS, 10000RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: binutils-2.17.tar.gz, Version 2.17

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	321	42.4	323	42.0	<u>322</u>	<u>42.2</u>	316	43.0	<u>318</u>	<u>42.8</u>	319	42.6
416.gamess	1211	16.2	1213	16.1	<u>1213</u>	<u>16.1</u>	1136	17.2	<u>1136</u>	<u>17.2</u>	1136	17.2
433.milc	1082	8.48	<u>1082</u>	<u>8.49</u>	1081	8.49	<u>1117</u>	<u>8.22</u>	1116	8.23	1118	8.21
434.zeusmp	759	12.0	759	12.0	<u>759</u>	<u>12.0</u>	765	11.9	765	11.9	<u>765</u>	<u>11.9</u>
435.gromacs	481	14.9	480	14.9	<u>480</u>	<u>14.9</u>	<u>476</u>	<u>15.0</u>	477	15.0	475	15.0
436.cactusADM	315	37.9	<u>313</u>	<u>38.1</u>	312	38.3	87.9	136	<u>86.9</u>	<u>138</u>	86.6	138
437.leslie3d	<u>656</u>	<u>14.3</u>	670	14.0	653	14.4	<u>656</u>	<u>14.3</u>	670	14.0	653	14.4
444.namd	630	12.7	629	12.8	<u>630</u>	<u>12.7</u>	<u>626</u>	<u>12.8</u>	627	12.8	625	12.8
447.dealII	525	21.8	<u>525</u>	<u>21.8</u>	524	21.8	493	23.2	<u>493</u>	<u>23.2</u>	493	23.2
450.soplex	<u>843</u>	<u>9.89</u>	849	9.82	842	9.90	<u>751</u>	<u>11.1</u>	753	11.1	749	11.1
453.povray	270	19.7	271	19.6	<u>271</u>	<u>19.7</u>	<u>235</u>	<u>22.7</u>	234	22.7	235	22.6
454.calculix	676	12.2	<u>676</u>	<u>12.2</u>	677	12.2	462	17.9	462	17.9	<u>462</u>	<u>17.9</u>
459.GemsFDTD	531	20.0	<u>532</u>	<u>19.9</u>	533	19.9	<u>517</u>	<u>20.5</u>	516	20.6	519	20.5
465.tonto	634	15.5	<u>634</u>	<u>15.5</u>	644	15.3	611	16.1	<u>609</u>	<u>16.1</u>	608	16.2
470.lbm	1164	11.8	1166	11.8	<u>1165</u>	<u>11.8</u>	1013	13.6	<u>1005</u>	<u>13.7</u>	1003	13.7
481.wrf	<u>665</u>	<u>16.8</u>	666	16.8	665	16.8	<u>688</u>	<u>16.2</u>	685	16.3	688	16.2
482.sphinx3	1109	17.6	<u>1087</u>	<u>17.9</u>	1071	18.2	1031	18.9	1021	19.1	<u>1027</u>	<u>19.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores

## General Notes

All benchmarks compiled in 64-bit mode except 450.soplex,  
470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/140Ba-10  
(Intel Xeon E7340)

**SPECfp2006 = 18.6**

**SPECfp\_base2006 = 16.3**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Mar-2008

**Hardware Availability:** Sep-2007

**Software Availability:** Nov-2007

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast -parallel

C++ benchmarks:

-fast -parallel

Fortran benchmarks:

-fast -parallel

Benchmarks using both Fortran and C:

-fast -parallel



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/140Ba-10  
(Intel Xeon E7340)

SPECfp2006 = 18.6

SPECfp\_base2006 = 16.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2008

Hardware Availability: Sep-2007

Software Availability: Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/140Ba-10  
(Intel Xeon E7340)

**SPECfp2006 = 18.6**

**SPECfp\_base2006 = 16.3**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Mar-2008

**Hardware Availability:** Sep-2007

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/140Ba-10  
(Intel Xeon E7340)

**SPECfp2006 = 18.6**

**SPECfp\_base2006 = 16.3**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Mar-2008  
**Hardware Availability:** Sep-2007  
**Software Availability:** Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 18:14:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 April 2008.