



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp[®]2006 = 14.3

BladeSymphony BS320 es (Intel Xeon L5320)

SPECfp_base2006 = 12.2

CPU2006 license: 872


Test date: Mar-2008

Test sponsor: HITACHI

Hardware Availability: Dec-2007

Tested by: HITACHI

Software Availability: Nov-2007

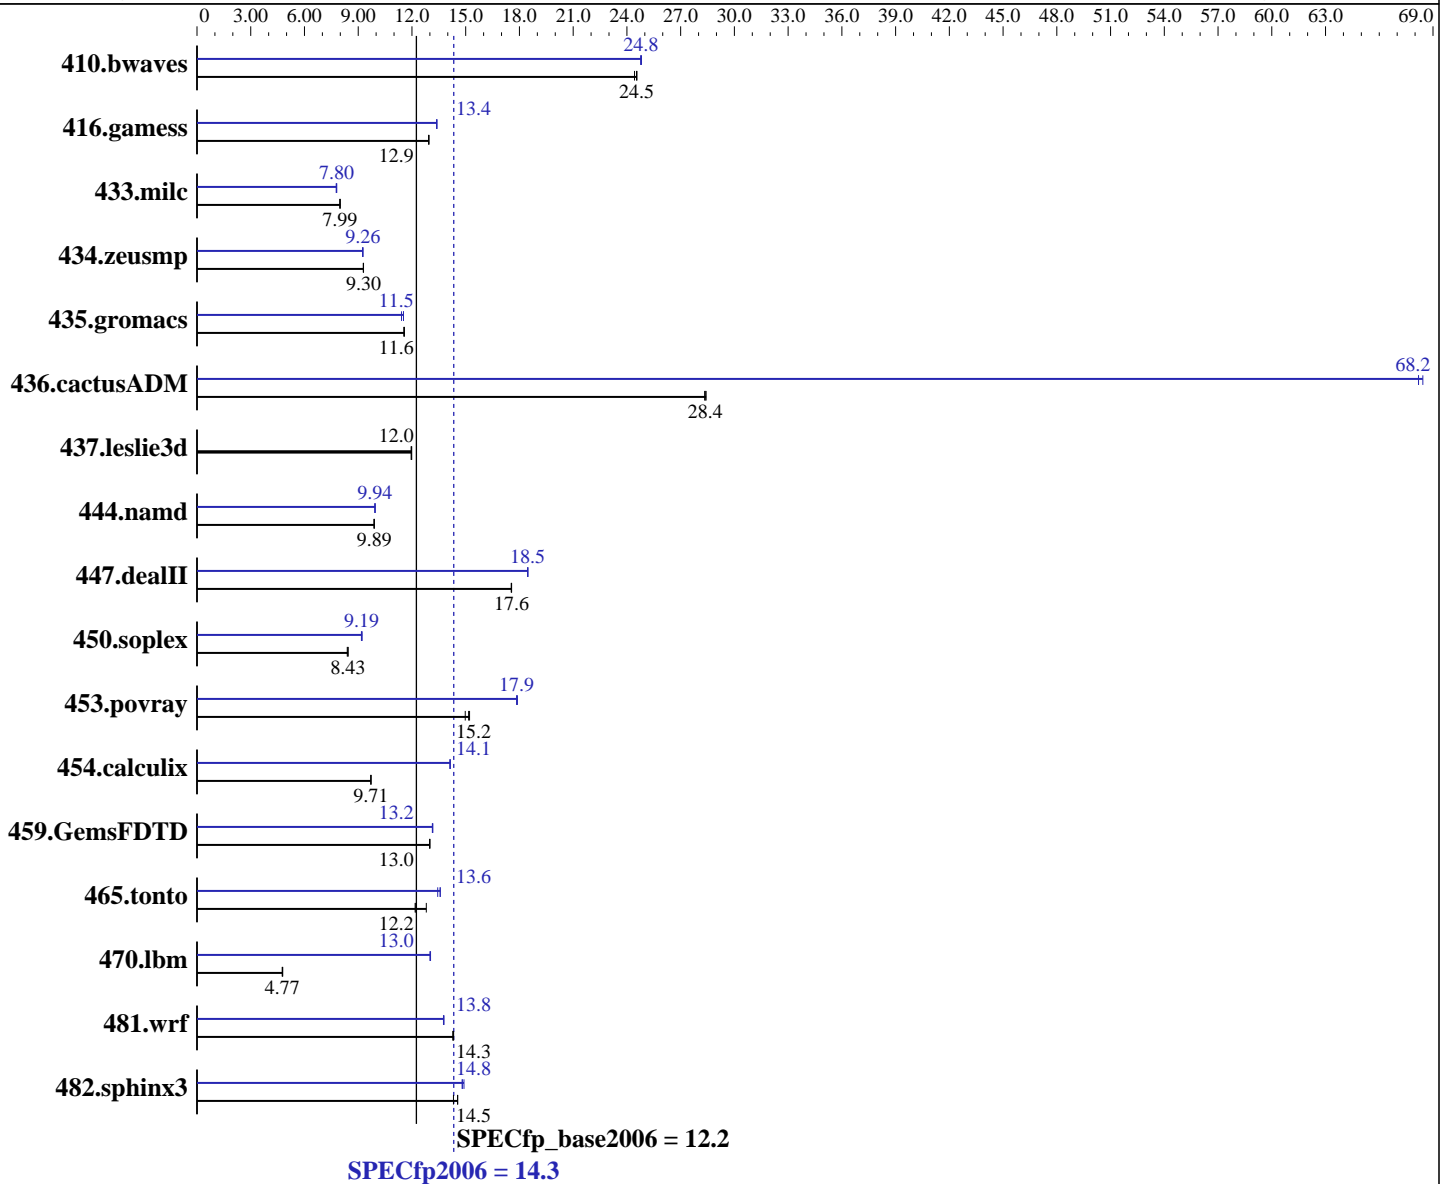

Hardware

CPU Name: Intel Xeon L5320
 CPU Characteristics: 1066MHz system bus
 CPU MHz: 1860
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.1 (Tikanga)
 Kernel 2.6.18-53.el5 on an x86_64
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux
 Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp2006 = 14.3

BladeSymphony BS320 es (Intel Xeon L5320)

SPECfp_base2006 = 12.2

CPU2006 license: 872

Test date: Mar-2008

Test sponsor: HITACHI

Hardware Availability: Dec-2007

Tested by: HITACHI

Software Availability: Nov-2007

L3 Cache: None
 Other Cache: None
 Memory: 16 GB(4 x 4 GB PC2-5300F CAS 5-5-5)
 Disk Subsystem: 1 x 147 GB 10000 rpm SAS
 Other Hardware: None

Auto Parallel: Yes
 File System: ext3
 System State: Multi-user run level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	553	24.6	556	24.4	554	24.5	548	24.8	549	24.8	548	24.8
416.gamess	1514	12.9	1513	12.9	1513	12.9	1463	13.4	1464	13.4	1462	13.4
433.milc	1149	7.99	1151	7.97	1148	7.99	1178	7.80	1177	7.80	1181	7.77
434.zeusmp	980	9.28	979	9.30	979	9.30	983	9.26	985	9.24	982	9.26
435.gromacs	618	11.6	617	11.6	618	11.6	625	11.4	619	11.5	619	11.5
436.cactusADM	422	28.3	420	28.4	421	28.4	175	68.4	175	68.2	175	68.2
437.leslie3d	786	12.0	784	12.0	786	12.0	786	12.0	784	12.0	786	12.0
444.namd	810	9.90	811	9.89	811	9.89	808	9.93	806	9.95	807	9.94
447.dealII	651	17.6	652	17.6	652	17.5	619	18.5	619	18.5	620	18.5
450.soplex	989	8.43	990	8.43	994	8.39	907	9.19	909	9.18	905	9.22
453.povray	350	15.2	355	15.0	351	15.2	297	17.9	298	17.9	298	17.8
454.calculix	850	9.71	850	9.71	850	9.71	584	14.1	584	14.1	584	14.1
459.GemsFDTD	816	13.0	817	13.0	817	13.0	806	13.2	807	13.2	808	13.1
465.tonto	808	12.2	769	12.8	806	12.2	725	13.6	725	13.6	732	13.4
470.lbm	2888	4.76	2881	4.77	2870	4.79	1056	13.0	1054	13.0	1056	13.0
481.wrf	782	14.3	781	14.3	780	14.3	812	13.8	810	13.8	812	13.8
482.sphinx3	1339	14.6	1340	14.5	1361	14.3	1308	14.9	1316	14.8	1316	14.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to physical,0

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp2006 = 14.3

BladeSymphony BS320 es (Intel Xeon L5320)

SPECfp_base2006 = 12.2

CPU2006 license: 872

Test date: Mar-2008

Test sponsor: HITACHI

Hardware Availability: Dec-2007

Tested by: HITACHI

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-fast -parallel

C++ benchmarks:

-fast -parallel

Fortran benchmarks:

-fast -parallel

Benchmarks using both Fortran and C:

-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):

```

/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp2006 = 14.3

BladeSymphony BS320 es (Intel Xeon L5320)

SPECfp_base2006 = 12.2

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Peak Compiler Invocation (Continued)

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof_gen(pass 1) -prof_use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp2006 = 14.3

BladeSymphony BS320 es (Intel Xeon L5320)

SPECfp_base2006 = 12.2

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -prof_gen(pass 1) -prof_use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof_gen(pass 1) -prof_use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof_gen(pass 1) -prof_use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.01.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp2006 = 14.3

BladeSymphony BS320 es (Intel Xeon L5320)

SPECfp_base2006 = 12.2

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 18:30:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.