



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 47.5

PowerEdge T105 (AMD Opteron 1354, 2.2 GHz)

SPECfp_rate_base2006 = 42.8

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2008

Hardware Availability: May-2008

Software Availability: Jun-2008

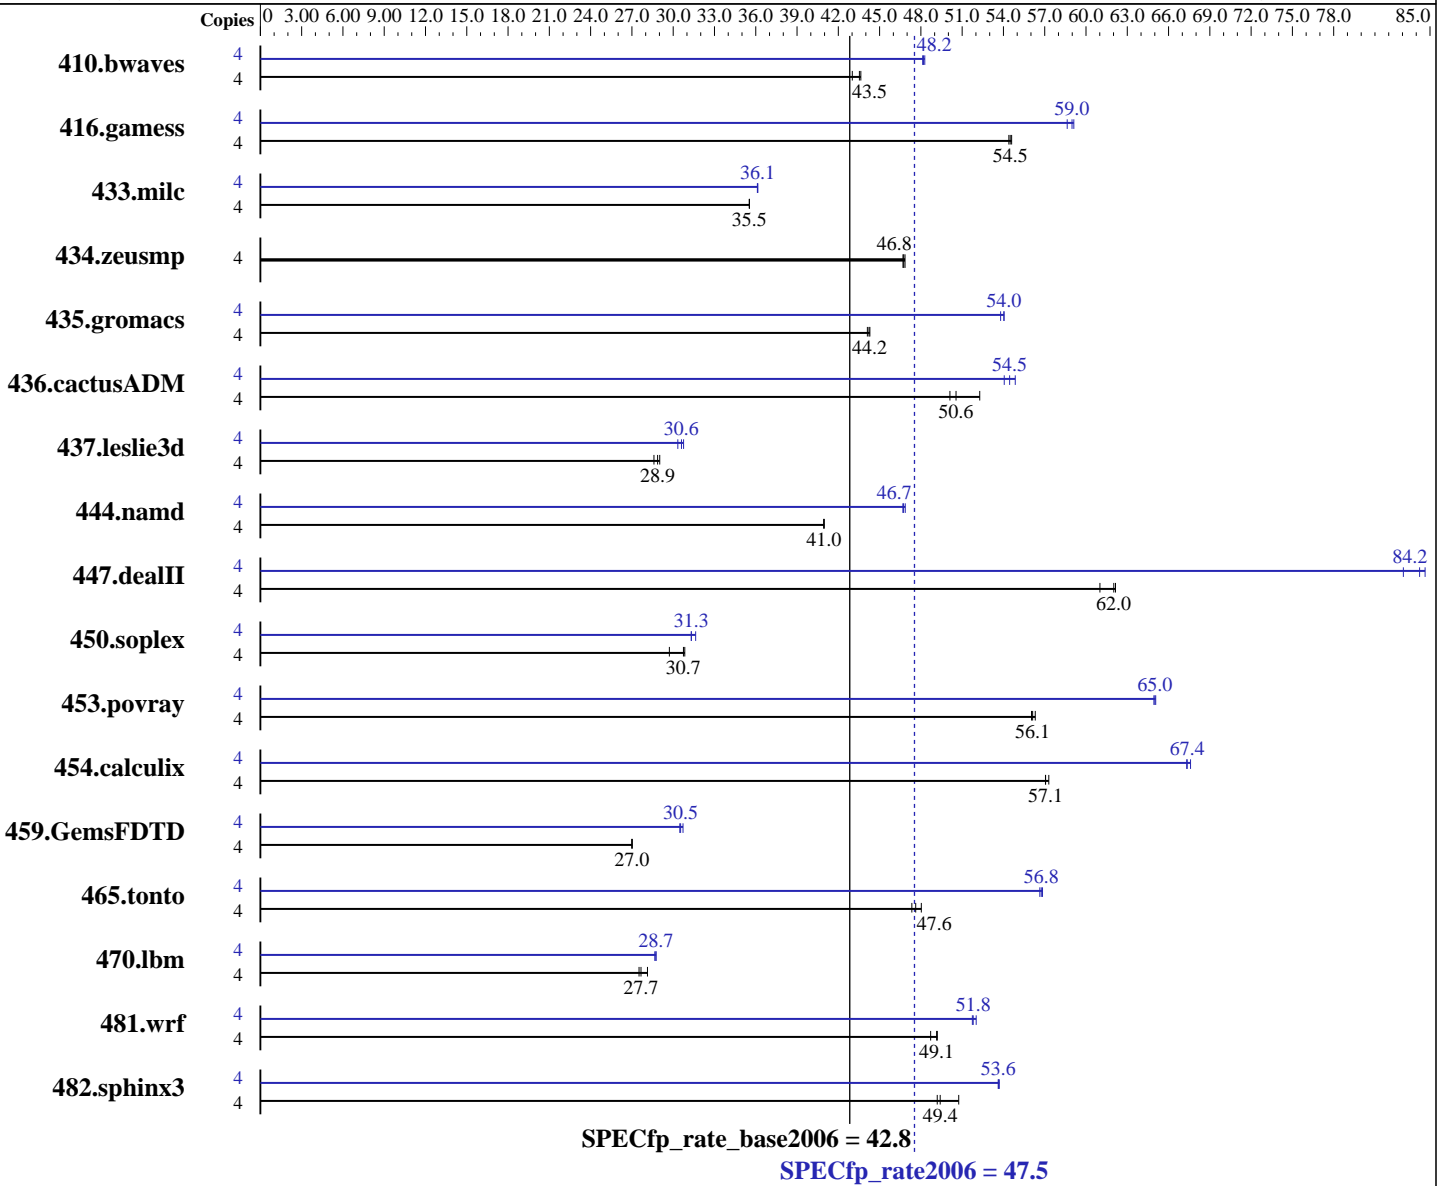

Hardware

CPU Name: AMD Opteron 1354
 CPU Characteristics: 2200
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 47.5

PowerEdge T105 (AMD Opteron 1354, 2.2 GHz)

SPECfp_rate_base2006 = 42.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: May-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (4 x 2GB 800 MHz DDR2)
Disk Subsystem: 2 x 250GB SATA, 7200 RPM (RAID-0)
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1264	43.0	1246	43.6	<u>1249</u>	<u>43.5</u>	4	<u>1128</u>	<u>48.2</u>	1126	48.3	1129	48.1
416.gamess	4	<u>1437</u>	<u>54.5</u>	1440	54.4	1435	54.6	4	<u>1328</u>	<u>59.0</u>	1325	59.1	1336	58.6
433.milc	4	1033	35.5	<u>1033</u>	<u>35.5</u>	1033	35.5	4	1016	36.1	<u>1016</u>	<u>36.1</u>	1017	36.1
434.zeusmp	4	777	46.8	779	46.7	<u>779</u>	<u>46.8</u>	4	777	46.8	779	46.7	<u>779</u>	<u>46.8</u>
435.gromacs	4	645	44.3	<u>646</u>	<u>44.2</u>	647	44.1	4	531	53.8	528	54.0	<u>529</u>	<u>54.0</u>
436.cactusADM	4	914	52.3	<u>946</u>	<u>50.6</u>	954	50.1	4	871	54.9	<u>878</u>	<u>54.5</u>	884	54.1
437.leslie3d	4	1296	29.0	1315	28.6	<u>1303</u>	<u>28.9</u>	4	1223	30.8	1239	30.3	<u>1229</u>	<u>30.6</u>
444.namd	4	783	40.9	783	41.0	<u>783</u>	<u>41.0</u>	4	<u>686</u>	<u>46.7</u>	687	46.7	685	46.9
447.dealII	4	<u>738</u>	<u>62.0</u>	736	62.1	750	61.0	4	<u>543</u>	<u>84.2</u>	541	84.6	551	83.1
450.soplex	4	1122	29.7	<u>1085</u>	<u>30.7</u>	1082	30.8	4	1065	31.3	<u>1065</u>	<u>31.3</u>	1055	31.6
453.povray	4	380	56.0	378	56.3	<u>379</u>	<u>56.1</u>	4	328	64.9	<u>327</u>	<u>65.0</u>	327	65.1
454.calculix	4	578	57.1	<u>578</u>	<u>57.1</u>	576	57.3	4	490	67.3	488	67.6	<u>490</u>	<u>67.4</u>
459.GemsFDTD	4	1571	27.0	1572	27.0	<u>1572</u>	<u>27.0</u>	4	1392	30.5	<u>1390</u>	<u>30.5</u>	1382	30.7
465.tonto	4	<u>826</u>	<u>47.6</u>	819	48.0	831	47.3	4	695	56.6	<u>694</u>	<u>56.8</u>	692	56.8
470.lbm	4	<u>1987</u>	<u>27.7</u>	1954	28.1	1997	27.5	4	1917	28.7	<u>1912</u>	<u>28.7</u>	1911	28.8
481.wrf	4	917	48.7	<u>909</u>	<u>49.1</u>	908	49.2	4	859	52.0	<u>863</u>	<u>51.8</u>	864	51.7
482.sphinx3	4	<u>1578</u>	<u>49.4</u>	1585	49.2	1536	50.8	4	<u>1453</u>	<u>53.6</u>	1452	53.7	1454	53.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
mount -t hugetlbfs nodev /mnt/hugepages
'ulimit -l 1228800' was used to set environment locked pages in memory limit
Set vm/nr_hugepages=600 in /etc/sysctl.conf
```

Base Compiler Invocation

C benchmarks:
pgcc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 47.5

PowerEdge T105 (AMD Opteron 1354, 2.2 GHz)

SPECfp_rate_base2006 = 42.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: May-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Msmartalloc=huge:150 -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:
-fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:
-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 47.5

PowerEdge T105 (AMD Opteron 1354, 2.2 GHz)

SPECfp_rate_base2006 = 42.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: May-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

470.lbm: pathcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pgf95

416.gamess: pathf95

459.GemsFDTD: pathf95

465.tonto: pathf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -Mnomain

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 47.5

PowerEdge T105 (AMD Opteron 1354, 2.2 GHz)

SPECfp_rate_base2006 = 42.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: May-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
-tp barcelona-64 -Bstatic_pgi

470.lbm: -march=barcelona -Ofast -CG:sse_cse_regs=0
-CG:locs_shallow_depth=1 -m3dnow

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge:150 -Mnodepchk -Mfprelaxed --zc_eh
-tp barcelona-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -TENV:frame_pointer=off
-LNO:prefetch=1 -OPT:malloc_alg=1 -CG:load_exe=0 -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast

```

Fortran benchmarks:

```

410.bwaves: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Msmartalloc
-Mprefetch=distance:12 -Mprefetch=nta -Mpre -Mfprelaxed

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 47.5

PowerEdge T105 (AMD Opteron 1354, 2.2 GHz)

SPECfp_rate_base2006 = 42.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: May-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

410.bwaves (continued):

-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3

-OPT:unroll_size=256

434.zeusmp: basepeak = yes

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)

-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse

-Mvect=fuse -Msmartalloc=huge:150 -Mprefetch=distance:8

-Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2

-LNO:prefetch_ahead=1 -CG:load_exe=0

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias

-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mfpapprox=rsqrt

-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)

-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse

-Msmartalloc=huge:150 -Mprefetch=t0 -Mpre -Mfprelaxed

-tp barcelona-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc

-Mprefetch=distance:8 -Mfprelaxed -tp barcelona-64

-Bstatic_pgi

Peak Other Flags

C benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

470.lbm: No flags used

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 47.5

PowerEdge T105 (AMD Opteron 1354, 2.2 GHz)

SPECfp_rate_base2006 = 42.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: May-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Peak Other Flags (Continued)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

436.cactusADM: No flags used

481.wrf: No flags used

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 13 11:35:59 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.