



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 90.5

PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

SPECfp_rate_base2006 = 82.7

CPU2006 license: 55


Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

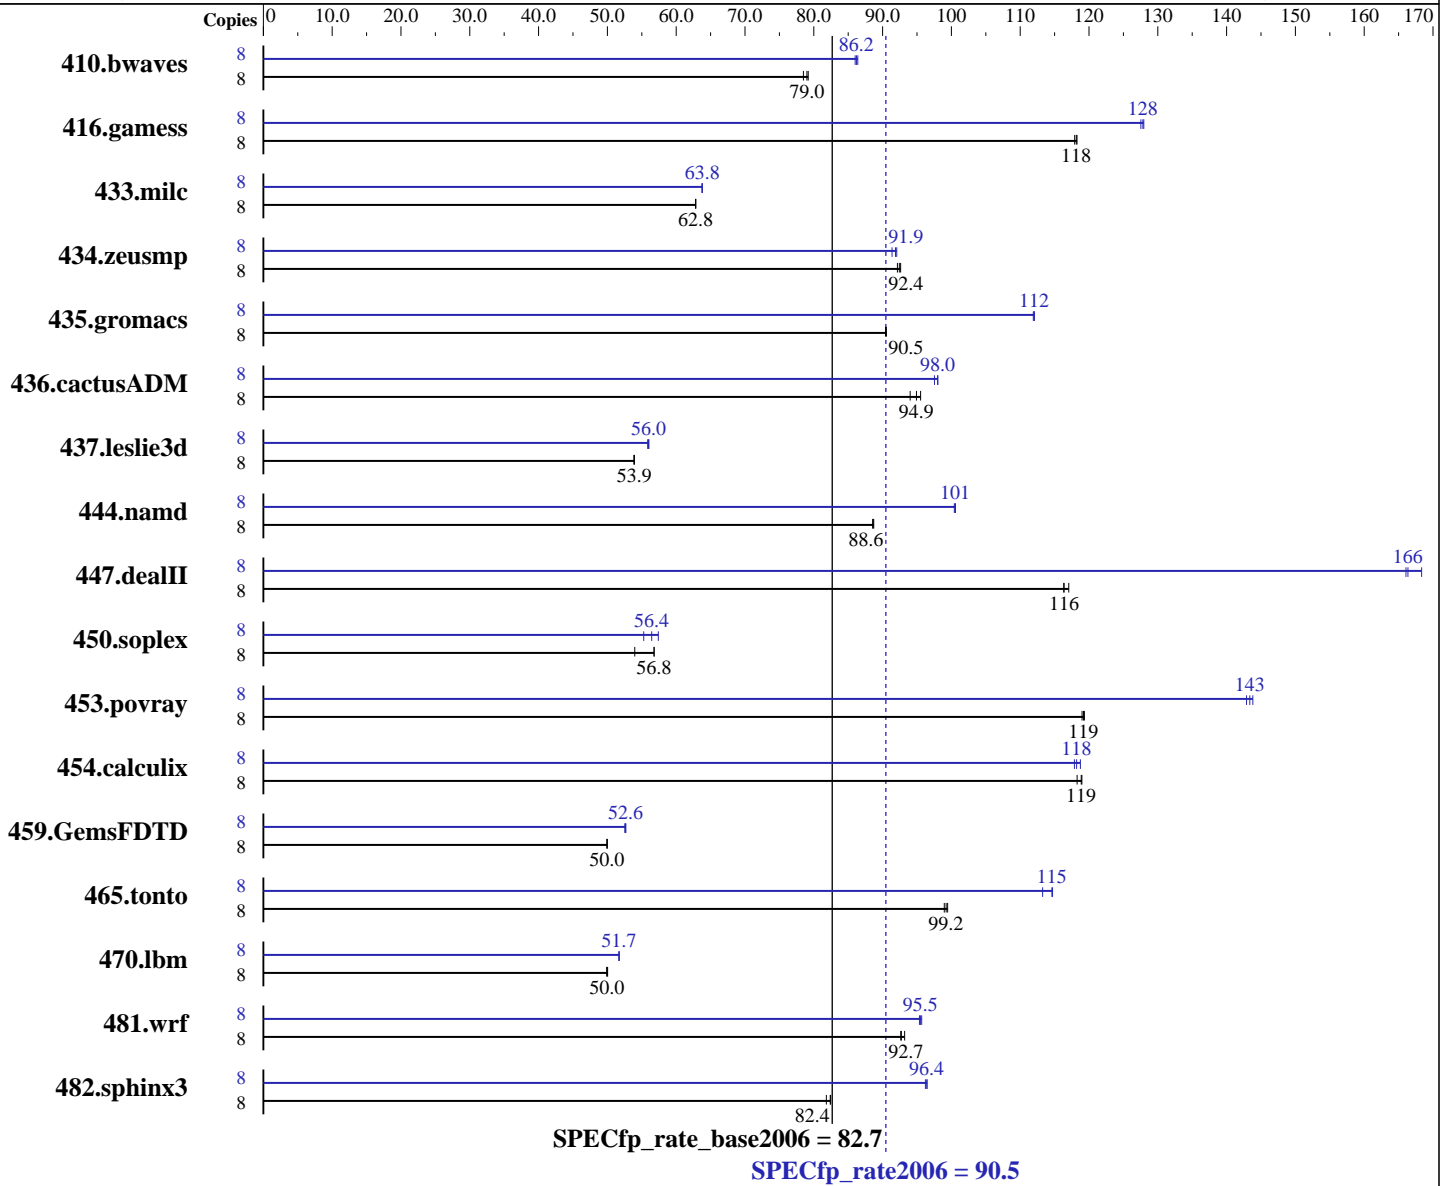

Hardware

CPU Name: AMD Opteron 2358 SE
 CPU Characteristics:
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 90.5

PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

SPECfp_rate_base2006 = 82.7

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4GB, DDR2-667, CL5)
Disk Subsystem: 1 x 73GB 2.5" SAS 10000 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1385	78.5	1373	79.2	1376	79.0	8	1258	86.4	1264	86.0	1261	86.2
416.gamess	8	1326	118	1325	118	1328	118	8	1225	128	1224	128	1228	128
433.milc	8	1169	62.8	1168	62.9	1169	62.8	8	1152	63.8	1151	63.8	1151	63.8
434.zeusmp	8	788	92.4	786	92.6	790	92.2	8	792	91.9	797	91.4	791	92.1
435.gromacs	8	632	90.4	631	90.5	631	90.5	8	510	112	510	112	510	112
436.cactusADM	8	1017	94.0	1007	94.9	1001	95.5	8	975	98.0	975	98.0	980	97.5
437.leslie3d	8	1396	53.9	1395	53.9	1395	53.9	8	1342	56.0	1346	55.9	1343	56.0
444.namd	8	724	88.6	723	88.7	724	88.6	8	638	101	639	100	638	101
447.dealII	8	787	116	782	117	786	116	8	551	166	544	168	550	166
450.soplex	8	1236	54.0	1175	56.8	1175	56.8	8	1207	55.3	1182	56.4	1162	57.4
453.povray	8	358	119	357	119	357	119	8	296	144	298	143	297	143
454.calculix	8	555	119	555	119	558	118	8	556	119	560	118	558	118
459.GemsFDTD	8	1699	50.0	1699	49.9	1699	50.0	8	1611	52.7	1616	52.5	1612	52.6
465.tonto	8	793	99.2	792	99.5	795	99.0	8	687	115	686	115	695	113
470.lbm	8	2203	49.9	2197	50.0	2200	50.0	8	2126	51.7	2126	51.7	2126	51.7
481.wrf	8	964	92.7	959	93.2	965	92.6	8	936	95.5	937	95.4	934	95.7
482.sphinx3	8	1906	81.8	1892	82.4	1891	82.4	8	1620	96.2	1617	96.4	1616	96.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
mount -t hugetlbfs nodev /mnt/hugepages
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
```

Base Compiler Invocation

C benchmarks:
pgcc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 90.5

PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

SPECfp_rate_base2006 = 82.7

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Base Compiler Invocation (Continued)

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 90.5

PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

SPECfp_rate_base2006 = 82.7

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Base Other Flags

C benchmarks:
-w -Mipa=jobs:4

C++ benchmarks:
-w -Mipa=jobs:4

Fortran benchmarks:
-w -Mipa=jobs:4

Benchmarks using both Fortran and C:
-w -Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):
pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):
pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):
pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):
pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -Mnomain

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 90.5

PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

SPECfp_rate_base2006 = 82.7

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
-tp barcelona-64 -Bstatic_pgi

```

```

470.lbm: -march=barcelona -Ofast -m3dnow

```

```

482.sphinx3: -march=barcelona -Ofast

```

C++ benchmarks:

```

444.namd: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fast -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -Mnodepchk -Munroll=n:4 -Munroll=m:8
-tp barcelona-64 -Bstatic_pgi

```

```

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions

```

```

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1

```

```

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0

```

Fortran benchmarks:

```

410.bwaves: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fastsse -Mfprelaxed -Msmartalloc
-Mprefetch=distance:12 -Mprefetch=nta -tp barcelona-64
-Bstatic_pgi

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 90.5

PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

SPECfp_rate_base2006 = 82.7

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll_size=256
-CG:load_exe=0 -OPT:malloc_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-OPT:malloc_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc_alg=1
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -OPT:malloc_alg=1 -m3dnow
-LANG:copyinout=off -IPA:callee_limit=5000

Peak Other Flags

C benchmarks:

433.milc: -w -Mipa=jobs:4

C++ benchmarks:

444.namd: -w -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -w -Mipa=jobs:4(pass 2)

434.zeusmp: -w -Mipa=jobs:4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 90.5

PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

SPECfp_rate_base2006 = 82.7

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -w -Mipa=jobs:4

454.calculix: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 13 11:36:26 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.