



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 76.0

PowerEdge 2970 (AMD Opteron 2346 HE, 1.8 GHz)

SPECfp_rate_base2006 = 69.3

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: Jun-2008

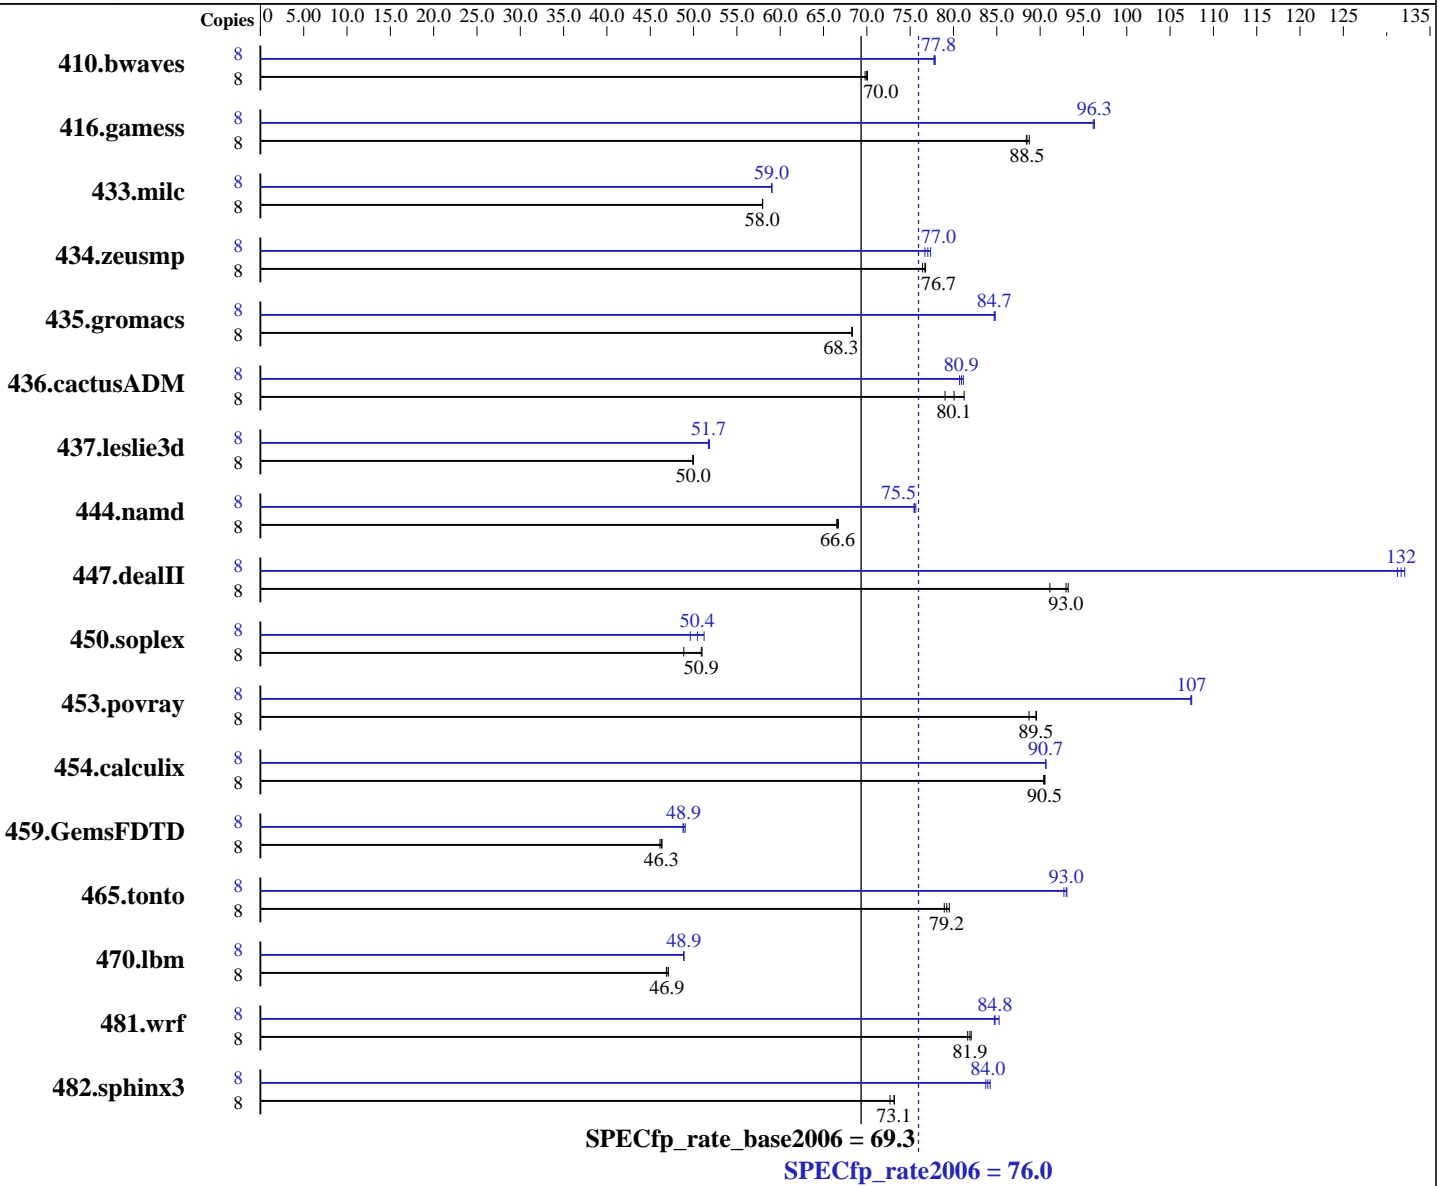

Hardware

CPU Name: AMD Opteron 2346 HE
 CPU Characteristics: 1800
 CPU MHz: Integrated
 FPU: 8 cores, 2 chips, 4 cores/chip
 CPU(s) enabled: 1,2 chips
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 512 KB I+D on chip per core
 Secondary Cache:

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 76.0

PowerEdge 2970 (AMD Opteron 2346 HE, 1.8 GHz)

SPECfp_rate_base2006 = 69.3

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4GB, DDR2-667, CL5)
Disk Subsystem: 1 x 73GB 2.5" SAS 10000 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1558	69.8	1552	70.1	1554	70.0	8	1397	77.8	1398	77.7	1396	77.9
416.gamess	8	1772	88.4	1770	88.5	1765	88.7	8	1627	96.3	1630	96.1	1627	96.3
433.milc	8	1267	58.0	1267	58.0	1267	57.9	8	1244	59.0	1244	59.0	1244	59.0
434.zeusmp	8	948	76.8	949	76.7	952	76.4	8	941	77.4	949	76.7	945	77.0
435.gromacs	8	837	68.3	836	68.3	836	68.3	8	674	84.7	674	84.7	673	84.8
436.cactusADM	8	1210	79.0	1177	81.2	1194	80.1	8	1181	80.9	1185	80.7	1178	81.1
437.leslie3d	8	1505	50.0	1504	50.0	1507	49.9	8	1454	51.7	1454	51.7	1451	51.8
444.namd	8	965	66.5	963	66.6	962	66.7	8	850	75.5	850	75.4	848	75.7
447.dealII	8	982	93.2	1004	91.1	984	93.0	8	693	132	695	132	697	131
450.soplex	8	1365	48.9	1311	50.9	1309	51.0	8	1345	49.6	1323	50.4	1303	51.2
453.povray	8	480	88.7	475	89.6	475	89.5	8	396	107	396	107	396	107
454.calculix	8	729	90.5	730	90.4	729	90.6	8	728	90.6	728	90.7	728	90.7
459.GemsFDTD	8	1840	46.1	1834	46.3	1831	46.4	8	1740	48.8	1737	48.9	1731	49.0
465.tonto	8	997	78.9	994	79.2	990	79.5	8	846	93.1	849	92.7	846	93.0
470.lbm	8	2346	46.9	2334	47.1	2343	46.9	8	2249	48.9	2249	48.9	2249	48.9
481.wrf	8	1091	81.9	1089	82.0	1095	81.6	8	1054	84.8	1055	84.7	1048	85.3
482.sphinx3	8	2145	72.7	2131	73.2	2132	73.1	8	1862	83.7	1857	84.0	1851	84.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
mount -t hugetlbfs nodev /mnt/hugepages
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
```

Base Compiler Invocation

C benchmarks:
pgcc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 76.0

PowerEdge 2970 (AMD Opteron 2346 HE, 1.8 GHz)

SPECfp_rate_base2006 = 69.3

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Base Compiler Invocation (Continued)

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 76.0

PowerEdge 2970 (AMD Opteron 2346 HE, 1.8 GHz)

SPECfp_rate_base2006 = 69.3

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Base Other Flags

C benchmarks:
-w -Mipa=jobs:4

C++ benchmarks:
-w -Mipa=jobs:4

Fortran benchmarks:
-w -Mipa=jobs:4

Benchmarks using both Fortran and C:
-w -Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):
pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):
pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):
pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):
pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 76.0

PowerEdge 2970 (AMD Opteron 2346 HE, 1.8 GHz)

SPECfp_rate_base2006 = 69.3

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
-tp barcelona-64 -Bstatic_pgi

470.lbm: -march=barcelona -Ofast -m3dnow

482.sphinx3: -march=barcelona -Ofast

```

C++ benchmarks:

```

444.namd: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fast -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -Mnodepchk -Munroll=n:4 -Munroll=m:8
-tp barcelona-64 -Bstatic_pgi

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0

```

Fortran benchmarks:

```

410.bwaves: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fastsse -Mfprelaxed -Msmartalloc
-Mprefetch=distance:12 -Mprefetch=nta -tp barcelona-64
-Bstatic_pgi

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 76.0

PowerEdge 2970 (AMD Opteron 2346 HE, 1.8 GHz)

SPECfp_rate_base2006 = 69.3

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll_size=256
-CG:load_exe=0 -OPT:malloc_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-OPT:malloc_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc_alg=1
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -OPT:malloc_alg=1 -m3dnow
-LANG:copyinout=off -IPA:callee_limit=5000

Peak Other Flags

C benchmarks:

433.milc: -w -Mipa=jobs:4

C++ benchmarks:

444.namd: -w -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -w -Mipa=jobs:4(pass 2)

434.zeusmp: -w -Mipa=jobs:4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 76.0

PowerEdge 2970 (AMD Opteron 2346 HE, 1.8 GHz)

SPECfp_rate_base2006 = 69.3

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -w -Mipa=jobs:4

454.calculix: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 13 11:37:02 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.