



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECfp<sup>®</sup>\_rate2006 = 66.3

### PowerEdge SC1435 (AMD Opteron 2344 HE, 1.7 GHz)

### SPECfp\_rate\_base2006 = 60.1

CPU2006 license: 55


Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

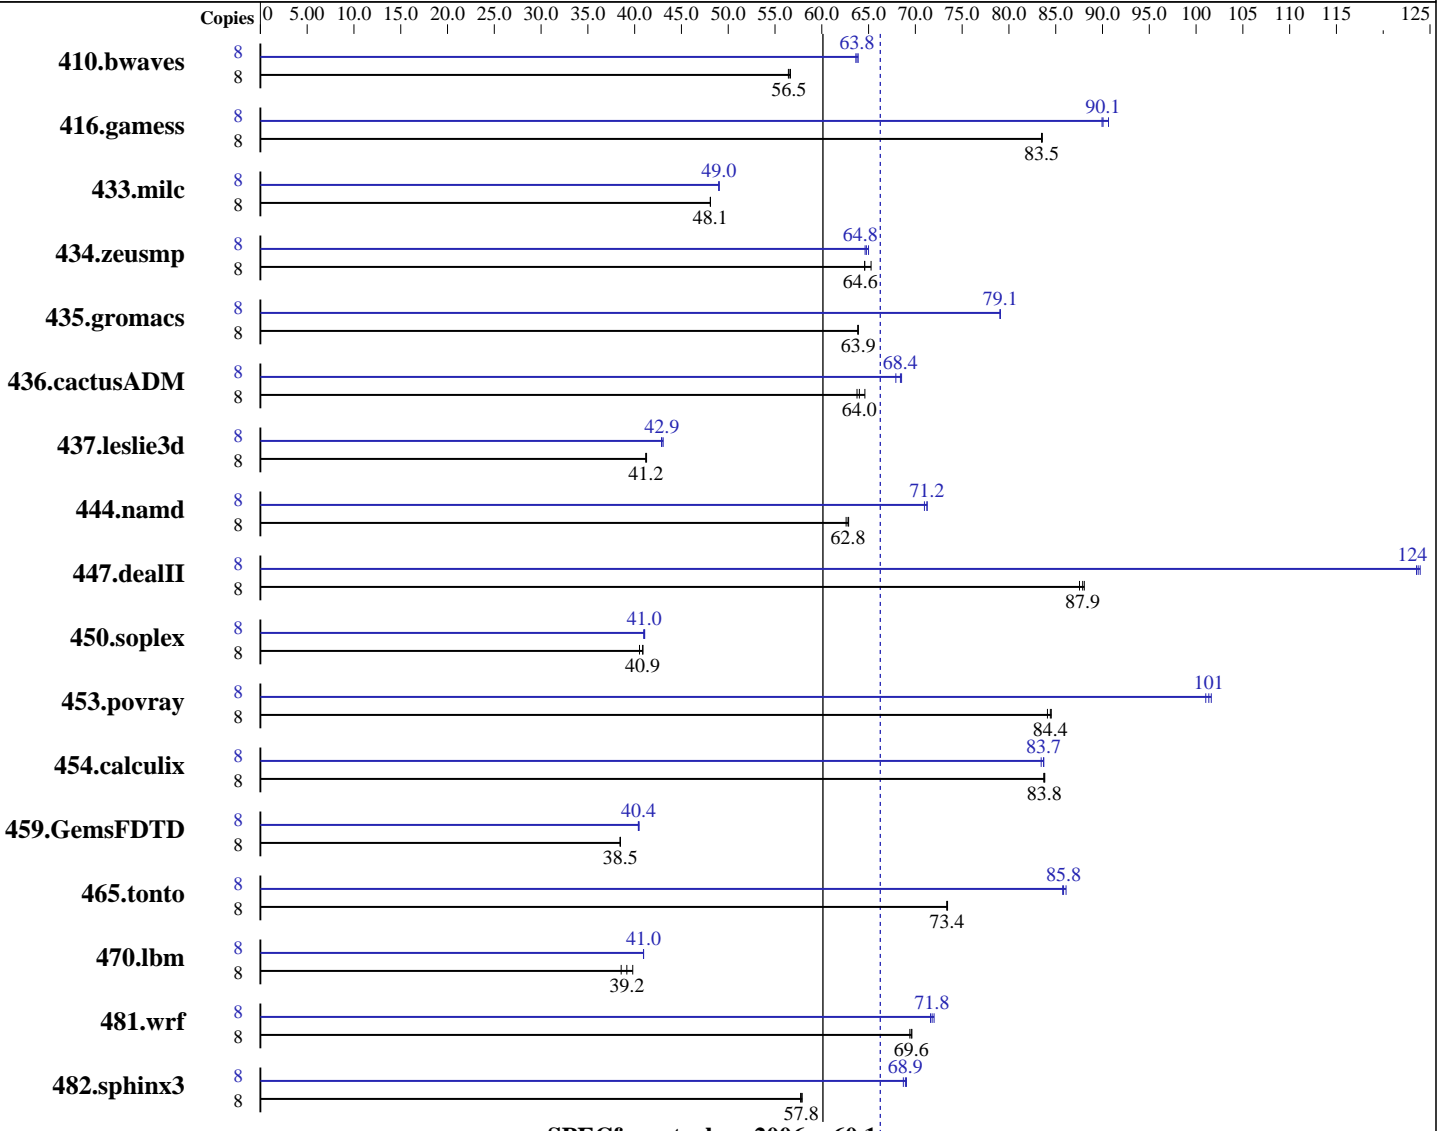

#### Hardware

CPU Name: AMD Opteron 2344 HE  
 CPU Characteristics:  
 CPU MHz: 1700  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

#### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 66.3

PowerEdge SC1435 (AMD Opteron 2344 HE, 1.7 GHz)

SPECfp\_rate\_base2006 = 60.1

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

L3 Cache: 2 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (8 x 2GB, DDR2-667 CL5)  
Disk Subsystem: 1 x 73GB SAS, 10000 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<u>1924</u>	<u>56.5</u>	1919	56.7	1927	56.4	8	1702	63.9	<u>1705</u>	<u>63.8</u>	1708	63.6
416.gamess	8	1876	83.5	<u>1876</u>	<u>83.5</u>	1874	83.6	8	<u>1739</u>	<u>90.1</u>	1728	90.6	1741	90.0
433.milc	8	1527	48.1	<u>1527</u>	<u>48.1</u>	1527	48.1	8	1499	49.0	1498	49.0	<u>1499</u>	<u>49.0</u>
434.zeusmp	8	1127	64.6	1115	65.3	<u>1127</u>	<u>64.6</u>	8	1126	64.6	<u>1124</u>	<u>64.8</u>	1120	65.0
435.gromacs	8	894	63.9	895	63.8	<u>894</u>	<u>63.9</u>	8	<u>722</u>	<u>79.1</u>	722	79.1	723	79.0
436.cactusADM	8	1480	64.6	1499	63.8	<u>1493</u>	<u>64.0</u>	8	<u>1398</u>	<u>68.4</u>	1408	67.9	1395	68.5
437.leslie3d	8	<u>1825</u>	<u>41.2</u>	1822	41.3	1825	41.2	8	1754	42.9	1747	43.0	<u>1753</u>	<u>42.9</u>
444.namd	8	1025	62.6	<u>1022</u>	<u>62.8</u>	1021	62.9	8	904	71.0	<u>901</u>	<u>71.2</u>	900	71.3
447.dealII	8	<u>1041</u>	<u>87.9</u>	1045	87.5	1039	88.1	8	<u>740</u>	<u>124</u>	738	124	741	124
450.soplex	8	1647	40.5	1632	40.9	<u>1633</u>	<u>40.9</u>	8	1629	41.0	<u>1626</u>	<u>41.0</u>	1624	41.1
453.povray	8	506	84.1	504	84.5	<u>504</u>	<u>84.4</u>	8	421	101	419	102	<u>420</u>	<u>101</u>
454.calculix	8	<u>788</u>	<u>83.8</u>	788	83.7	787	83.8	8	<u>789</u>	<u>83.7</u>	791	83.4	788	83.7
459.GemsFDTD	8	<u>2206</u>	<u>38.5</u>	2208	38.4	2206	38.5	8	2097	40.5	<u>2100</u>	<u>40.4</u>	2101	40.4
465.tonto	8	<u>1073</u>	<u>73.4</u>	1072	73.4	1073	73.4	8	918	85.7	<u>917</u>	<u>85.8</u>	914	86.1
470.lbm	8	2851	38.6	<u>2807</u>	<u>39.2</u>	2762	39.8	8	<u>2684</u>	<u>41.0</u>	2685	40.9	2684	41.0
481.wrf	8	<u>1285</u>	<u>69.6</u>	1287	69.4	1283	69.6	8	1248	71.6	<u>1245</u>	<u>71.8</u>	1241	72.0
482.sphinx3	8	2701	57.7	<u>2697</u>	<u>57.8</u>	2693	57.9	8	2258	69.0	2269	68.7	<u>2262</u>	<u>68.9</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
mount -t hugetlbfs nodev /mnt/hugepages
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
```

## Base Compiler Invocation

C benchmarks:  
pgcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 66.3

PowerEdge SC1435 (AMD Opteron 2344 HE, 1.7 GHz)

SPECfp\_rate\_base2006 = 60.1

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 66.3

PowerEdge SC1435 (AMD Opteron 2344 HE, 1.7 GHz)

SPECfp\_rate\_base2006 = 60.1

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Base Other Flags

C benchmarks:  
-w -Mipa=jobs:4

C++ benchmarks:  
-w -Mipa=jobs:4

Fortran benchmarks:  
-w -Mipa=jobs:4

Benchmarks using both Fortran and C:  
-w -Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):  
pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):  
pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):  
pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):  
pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 66.3

PowerEdge SC1435 (AMD Opteron 2344 HE, 1.7 GHz)

SPECfp\_rate\_base2006 = 60.1

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

### C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
-tp barcelona-64 -Bstatic_pgi

```

```

470.lbm: -march=barcelona -Ofast -m3dnow

```

```

482.sphinx3: -march=barcelona -Ofast

```

### C++ benchmarks:

```

444.namd: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fast -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -Mnodepchk -Munroll=n:4 -Munroll=m:8
-tp barcelona-64 -Bstatic_pgi

```

```

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions

```

```

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1

```

```

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0

```

### Fortran benchmarks:

```

410.bwaves: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fastsse -Mfprelaxed -Msmartalloc
-Mprefetch=distance:12 -Mprefetch=nta -tp barcelona-64
-Bstatic_pgi

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 66.3

PowerEdge SC1435 (AMD Opteron 2344 HE, 1.7 GHz)

SPECfp\_rate\_base2006 = 60.1

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast  
-Mipa=inline -tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll\_size=256  
-CG:load\_exe=0 -OPT:malloc\_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-OPT:malloc\_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc\_alg=1  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

436.cactusADM: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast  
-Mipa=inline -tp barcelona-64 -Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -OPT:malloc\_alg=1 -m3dnow  
-LANG:copyinout=off -IPA:callee\_limit=5000

## Peak Other Flags

C benchmarks:

433.milc: -w -Mipa=jobs:4

C++ benchmarks:

444.namd: -w -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -w -Mipa=jobs:4(pass 2)

434.zeusmp: -w -Mipa=jobs:4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 66.3

PowerEdge SC1435 (AMD Opteron 2344 HE, 1.7 GHz)

SPECfp\_rate\_base2006 = 60.1

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -w -Mipa=jobs:4

454.calculix: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Sep 13 11:37:10 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 August 2008.