



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 18.4

IBM System x3455 (AMD Opteron 2356)

SPECfp_base2006 = 17.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: May-2008

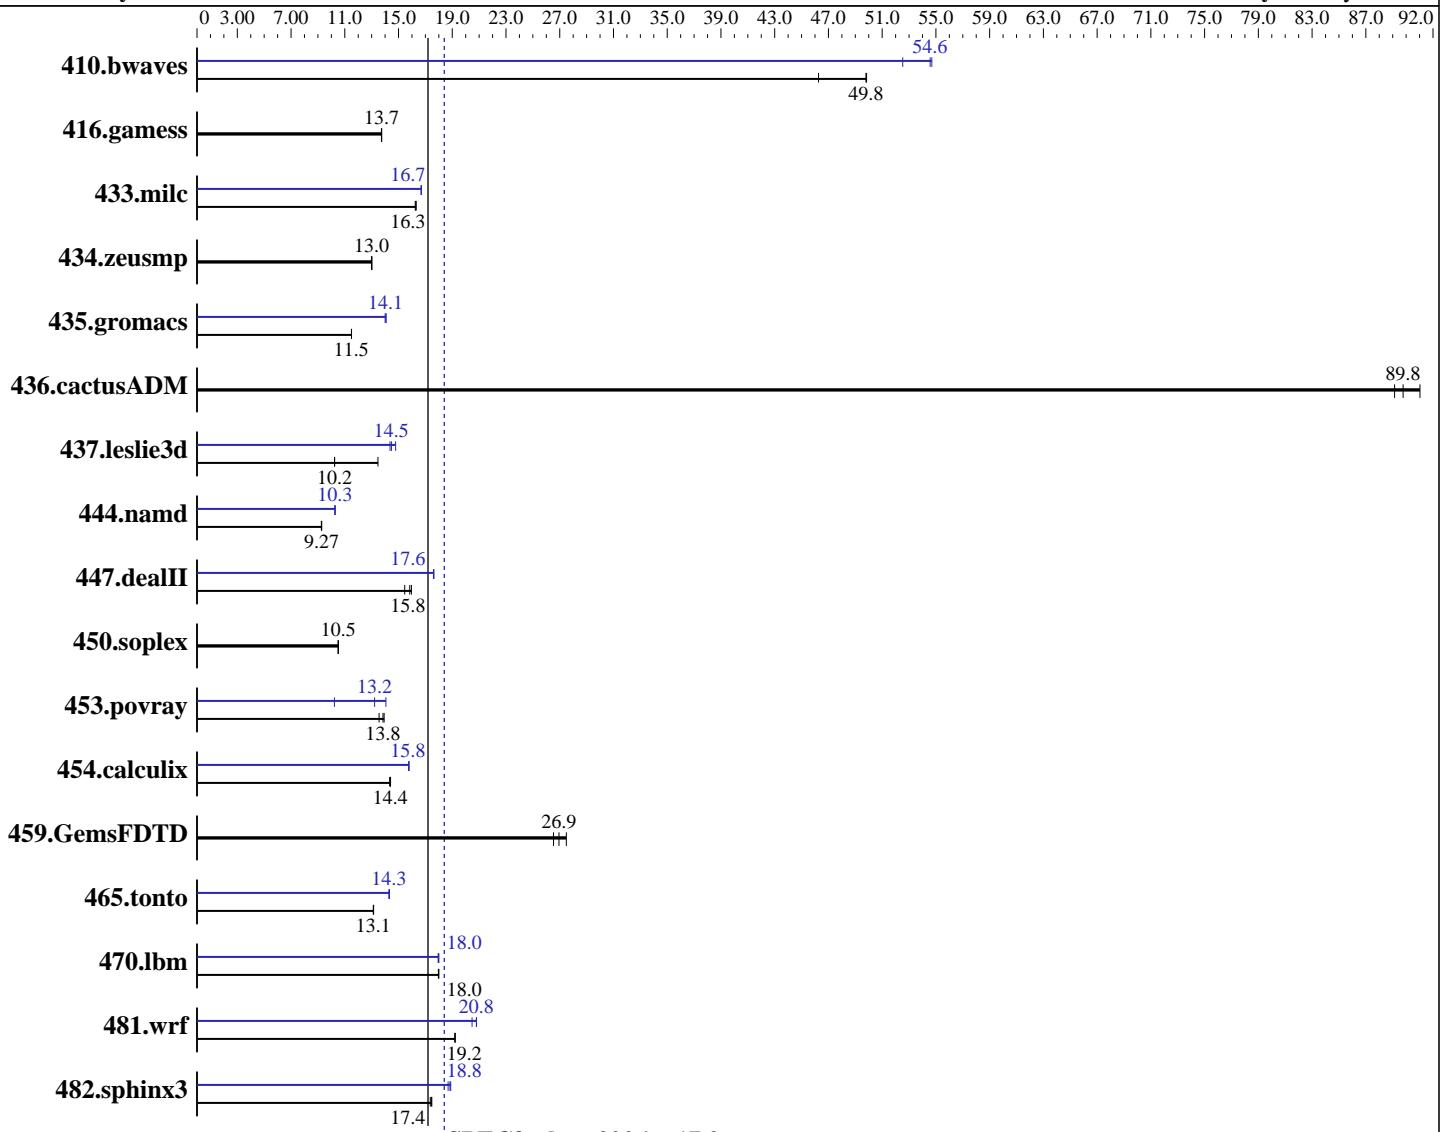

SPECfp_base2006 = 17.2

SPECfp2006 = 18.4

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18.50

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	18.4
IBM System x3455 (AMD Opteron 2356)	SPECfp_base2006 =	17.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: May-2008

L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB, DDR2-667 CL5 Reg Dual Rank)
Disk Subsystem:	1 x 160 GB SATA, 7200 RPM
Other Hardware:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	273	49.8	294	46.3	273	49.8	248	54.7	249	54.6	259	52.5
416.gamess	1426	13.7	1424	13.7	1425	13.7	1426	13.7	1424	13.7	1425	13.7
433.milc	565	16.2	563	16.3	563	16.3	550	16.7	550	16.7	549	16.7
434.zeusmp	700	13.0	701	13.0	699	13.0	700	13.0	701	13.0	699	13.0
435.gromacs	621	11.5	621	11.5	621	11.5	508	14.1	507	14.1	510	14.0
436.cactusADM	133	89.8	131	91.0	134	89.1	133	89.8	131	91.0	134	89.1
437.leslie3d	918	10.2	918	10.2	698	13.5	649	14.5	636	14.8	654	14.4
444.namd	867	9.26	865	9.27	864	9.29	780	10.3	781	10.3	781	10.3
447.dealII	740	15.5	722	15.8	717	16.0	649	17.6	650	17.6	649	17.6
450.soplex	793	10.5	794	10.5	793	10.5	793	10.5	794	10.5	793	10.5
453.povray	393	13.6	384	13.8	382	13.9	402	13.2	520	10.2	378	14.1
454.calculix	573	14.4	573	14.4	575	14.3	523	15.8	523	15.8	524	15.7
459.GemsFDTD	386	27.5	400	26.5	394	26.9	386	27.5	400	26.5	394	26.9
465.tonto	750	13.1	749	13.1	748	13.1	687	14.3	688	14.3	688	14.3
470.lbm	765	18.0	764	18.0	764	18.0	763	18.0	764	18.0	766	17.9
481.wrf	582	19.2	582	19.2	581	19.2	537	20.8	546	20.5	537	20.8
482.sphinx3	1115	17.5	1122	17.4	1117	17.4	1035	18.8	1032	18.9	1043	18.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

'numactl' was used to bind copies to the cores.

Environment stack size set to 'unlimited'.

'ulimit -l 2097152' was used to set environment locked pages in memory quantity.

NCPUS set to number of cores.

PGI_HUGE_PAGES set to 896.

Set vm/nr_hugepages=7168 in /etc/sysctl.conf

mount -t hugetlbfs nodev /mnt/hugepages

powersave -f was used to set the CPU frequency to its maximum.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	18.4
IBM System x3455 (AMD Opteron 2356)	SPECfp_base2006 =	17.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:
 pgcc

C++ benchmarks:
 pgcpp

Fortran benchmarks:
 pgf95

Benchmarks using both Fortran and C:
 pgcc pgf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
 -fastsse -Msmartralloc=huge:896 -Mconcur -Mfprelaxed -Mipa=fast
 -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
 -fastsse -Msmartralloc=huge:896 -Mfprelaxed -Mconcur --zc_eh
 -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:
 -fastsse -Mfprelaxed -Msmartralloc=huge:896 -Mconcur -Mipa=fast
 -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	18.4
IBM System x3455 (AMD Opteron 2356)	SPECfp_base2006 =	17.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-fastsse -Msmartralloc=huge:896 -Mconcur -Mfprelaxed -Mipa=fast  
-Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-Mipa=jobs:8
```

C++ benchmarks:

```
-Mipa=jobs:8
```

Fortran benchmarks:

```
-Mipa=jobs:8
```

Benchmarks using both Fortran and C:

```
-Mipa=jobs:8
```

Peak Compiler Invocation

C benchmarks:

```
pgcc
```

C++ benchmarks:

```
pgcpp
```

Fortran benchmarks:

```
pgf95
```

Benchmarks using both Fortran and C:

```
pgcc pgf95
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -Mnomain  
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
450.soplex: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 18.4

IBM System x3455 (AMD Opteron 2356)

SPECfp_base2006 = 17.2

CPU2006 license: 11

Test date: Jul-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: May-2008

Peak Portability Flags (Continued)

```

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:896 -Msafeptr -Mconcur
           -Mfprelaxed -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
           -Mipa=shape -tp barcelona-64 -Bstatic_pgi

470.lbm: -fastsse -Msmartalloc=huge:896 -Mprefetch=t0 -Mloop32
           -Mfprelaxed -Mipa=fast -Mipa=inline -tp barcelona-64
           -Bstatic_pgi

482.sphinx3: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
              -Mipa=inline(pass 2) -fastsse -Mfprelaxed -Msmartalloc
              -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
           -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
           -Msmartalloc=huge:896 -Mnodepchk -Mfprelaxed --zc_eh
           -tp barcelona-64 -Bstatic_pgi

447.dealII: -fastsse -alias=ansi -Msmartalloc=huge:896 -Mprefetch=t0
            -Mvect -Mfprelaxed --zc_eh -Mipa=fast -Mipa=inline
            -tp barcelona-32 -Bstatic_pgi

450.soplex: basepeak = yes

453.povray: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
            -Mipa=fast(pass 2) -Mipa=inlinenopfo:3(pass 2)
            -Mipa=staticfunc(pass 2) -fastsse -Msmartalloc=huge:896
            -Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

```

Fortran benchmarks:

```

410.bwaves: -fastsse -Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
            -Mconcur -Mloop32 -Mpre -Mfprelaxed -Mipa=fast
            -Mipa=inline -tp barcelona-64 -Bstatic_pgi

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 18.4

IBM System x3455 (AMD Opteron 2356)

SPECfp_base2006 = 17.2

CPU2006 license: 11

Test date: Jul-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: May-2008

Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mconcur=noaltcode(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -fastsse -Mvect=fuse
 -Msmartralloc=huge:896 -Mprefetch=distance:8 -Mprefetch=t0
 -Mfrelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: basepeak = yes

465.tonto: -fastsse -O4 -Mvect=noaltcode -Msmartralloc=huge:896
 -Mprefetch=distance:8 -Mprefetch=t0 -Mfrelaxed -Mipa=fast
 -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

435.gromacs: -fastsse -Msmartralloc=huge:896 -Mfrelaxed -Mconcur
 -Mfpapprox=rsqrt -Mipa=fast -Mipa=inline -tp barcelona-64
 -Bstatic_pgi

436.cactusADM: basepeak = yes

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
 -Msmartralloc=huge:896 -Mloop32 -Mprefetch=t0 -Mpre
 -Mfrelaxed -tp barcelona-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartralloc
 -Mprefetch=distance:8 -Mconcur=noaltcode -Mfrelaxed
 -tp barcelona-64 -Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:8(pass 2)

C++ benchmarks:

-Mipa=jobs:8(pass 2)

Fortran benchmarks:

-Mipa=jobs:8

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:8(pass 2)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 18.4

IBM System x3455 (AMD Opteron 2356)

SPECfp_base2006 = 17.2

CPU2006 license: 11

Test date: Jul-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: May-2008

Peak Other Flags (Continued)

481.wrf: No flags used

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/pgi72_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 19:22:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 August 2008.