



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]2006 = 16.3

IBM BladeCenter LS22 (AMD Opteron 2347 HE)

SPECfp_base2006 = 15.4

CPU2006 license: 11


Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

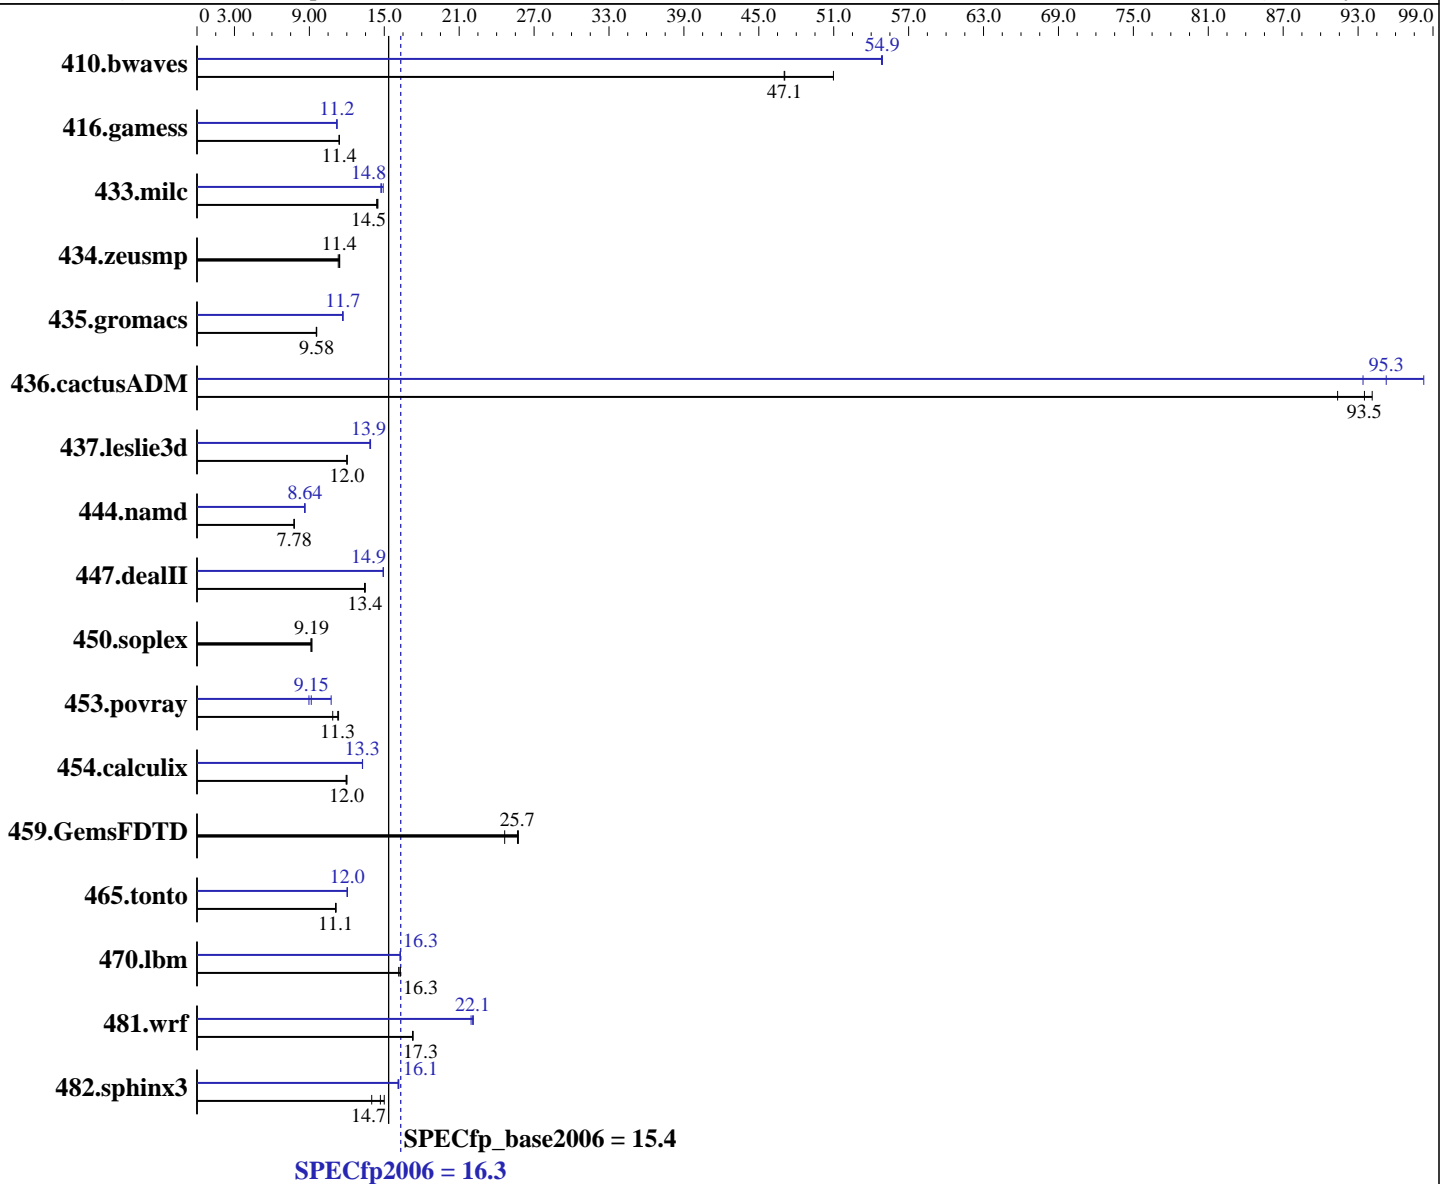

Hardware

CPU Name: AMD Opteron 2347 HE
 CPU Characteristics:
 CPU MHz: 1900
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18.50

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.3

IBM BladeCenter LS22 (AMD Opteron 2347 HE)

SPECfp_base2006 = 15.4

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB DDR2-6400 ECC)
Disk Subsystem: 1 x 36 GB SAS, 10000 RPM
Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	289	47.0	<u>289</u>	<u>47.1</u>	267	51.0	248	54.9	248	54.8	<u>248</u>	<u>54.9</u>
416.gamess	1719	11.4	1718	11.4	<u>1718</u>	<u>11.4</u>	1749	11.2	1746	11.2	<u>1747</u>	<u>11.2</u>
433.milc	638	14.4	<u>635</u>	<u>14.5</u>	634	14.5	615	14.9	<u>622</u>	<u>14.8</u>	623	14.7
434.zeusmp	<u>798</u>	<u>11.4</u>	796	11.4	804	11.3	<u>798</u>	<u>11.4</u>	796	11.4	804	11.3
435.gromacs	<u>746</u>	<u>9.58</u>	745	9.59	747	9.55	610	11.7	612	11.7	<u>611</u>	<u>11.7</u>
436.cactusADM	131	91.4	<u>128</u>	<u>93.5</u>	127	94.1	122	98.3	<u>125</u>	<u>95.3</u>	128	93.4
437.leslie3d	782	12.0	782	12.0	<u>782</u>	<u>12.0</u>	<u>678</u>	<u>13.9</u>	676	13.9	678	13.9
444.namd	1030	7.79	1031	7.78	<u>1030</u>	<u>7.78</u>	930	8.62	<u>929</u>	<u>8.64</u>	927	8.65
447.dealII	849	13.5	853	13.4	<u>851</u>	<u>13.4</u>	<u>766</u>	<u>14.9</u>	766	14.9	767	14.9
450.soplex	907	9.20	914	9.12	<u>908</u>	<u>9.19</u>	907	9.20	914	9.12	<u>908</u>	<u>9.19</u>
453.povray	469	11.3	489	10.9	<u>472</u>	<u>11.3</u>	<u>581</u>	<u>9.15</u>	495	10.7	593	8.97
454.calculix	687	12.0	<u>688</u>	<u>12.0</u>	691	11.9	622	13.3	623	13.2	<u>622</u>	<u>13.3</u>
459.GemsFDTD	412	25.7	431	24.6	<u>413</u>	<u>25.7</u>	412	25.7	431	24.6	<u>413</u>	<u>25.7</u>
465.tonto	<u>886</u>	<u>11.1</u>	886	11.1	883	11.1	817	12.0	818	12.0	<u>817</u>	<u>12.0</u>
470.lbm	844	16.3	851	16.2	<u>844</u>	<u>16.3</u>	845	16.3	<u>843</u>	<u>16.3</u>	843	16.3
481.wrf	647	17.3	<u>646</u>	<u>17.3</u>	646	17.3	509	22.0	<u>506</u>	<u>22.1</u>	505	22.1
482.sphinx3	1300	15.0	<u>1327</u>	<u>14.7</u>	1393	14.0	1211	16.1	<u>1207</u>	<u>16.1</u>	1206	16.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

'numactl' was used to bind copies to the cores.
Environment stack size set to 'unlimited'.
'ulimit -l 2097152' was used to set environment locked pages in memory quantity.
NCPUS set to number of cores.
PGI_HUGE_PAGES set to 896.
Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs none /mnt/hugepages
Processor Performance States Disabled in BIOS
Memory ChipKill Disabled in BIOS



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.3

IBM BladeCenter LS22 (AMD Opteron 2347 HE)

SPECfp_base2006 = 15.4

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge:896 -Mconcur -Mfprelaxed -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur --zc_eh
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Mfprelaxed -Msmartalloc=huge:896 -Mconcur -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.3

IBM BladeCenter LS22 (AMD Opteron 2347 HE)

SPECfp_base2006 = 15.4

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge:896 -Mconcur -Mfprelaxed -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:8

C++ benchmarks:

-Mipa=jobs:8

Fortran benchmarks:

-Mipa=jobs:8

Benchmarks using both Fortran and C:

-Mipa=jobs:8

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.3

IBM BladeCenter LS22 (AMD Opteron 2347 HE)

SPECfp_base2006 = 15.4

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -fastsse -Msmartalloc=huge:896 -Msafeptr -Mconcur
 -Mfprelaxed -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
 -Mipa=shape -tp barcelona-64 -Bstatic_pgi

470.lbm: -fastsse -Msmartalloc=huge:896 -Mprefetch=t0 -Mloop32
 -Mfprelaxed -Mipa=fast -Mipa=inline -tp barcelona-64
 -Bstatic_pgi

482.sphinx3: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -fastsse -Mfprelaxed -Msmartalloc
 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
 -Msmartalloc=huge:896 -Mnodepchk -Mfprelaxed --zc_eh
 -tp barcelona-64 -Bstatic_pgi

447.dealIII: -fastsse -alias=ansi -Msmartalloc=huge:896 -Mprefetch=t0
 -Mno vect -Mfprelaxed --zc_eh -Mipa=fast -Mipa=inline
 -tp barcelona-32 -Bstatic_pgi

450.soplex: basepeak = yes

453.povray: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inlinenopfo:3(pass 2)
 -Mipa=staticfunc(pass 2) -fastsse -Msmartalloc=huge:896
 -Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
 -Mconcur -Mloop32 -Mpre -Mfprelaxed -Mipa=fast
 -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.3

IBM BladeCenter LS22 (AMD Opteron 2347 HE)

SPECfp_base2006 = 15.4

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

Peak Optimization Flags (Continued)

416.gamess: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Mvect=noaltcode
-Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

434.zeusmp: basepeak = yes

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mconcur=noaltcode(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Mvect=fuse
-Msmartalloc=huge:896 -Mprefetch=distance:8 -Mprefetch=t0
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: basepeak = yes

465.tonto: -fastsse -O4 -Mvect=noaltcode -Msmartalloc=huge:896
-Mprefetch=distance:8 -Mprefetch=t0 -Mfprelaxed -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

435.gromacs: -fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur
-Mfpapprox=rsqrt -Mipa=fast -Mipa=inline -tp barcelona-64
-Bstatic_pgi

436.cactusADM: -fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur -Mdse
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Msmartalloc=huge:896 -Mloop32 -Mprefetch=t0 -Mpre
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc
-Mprefetch=distance:8 -Mconcur=noaltcode -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs : 8(pass 2)

C++ benchmarks:

-Mipa=jobs : 8(pass 2)

Fortran benchmarks:

-Mipa=jobs : 8

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.3

IBM BladeCenter LS22 (AMD Opteron 2347 HE)

SPECfp_base2006 = 15.4

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

Peak Other Flags (Continued)

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:8(pass 2)

481.wrf: No flags used

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/pgi72_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 19:07:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 September 2008.