



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®2006 = 26.4

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECfp_base2006 = 25.2

CPU2006 license: 3


Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

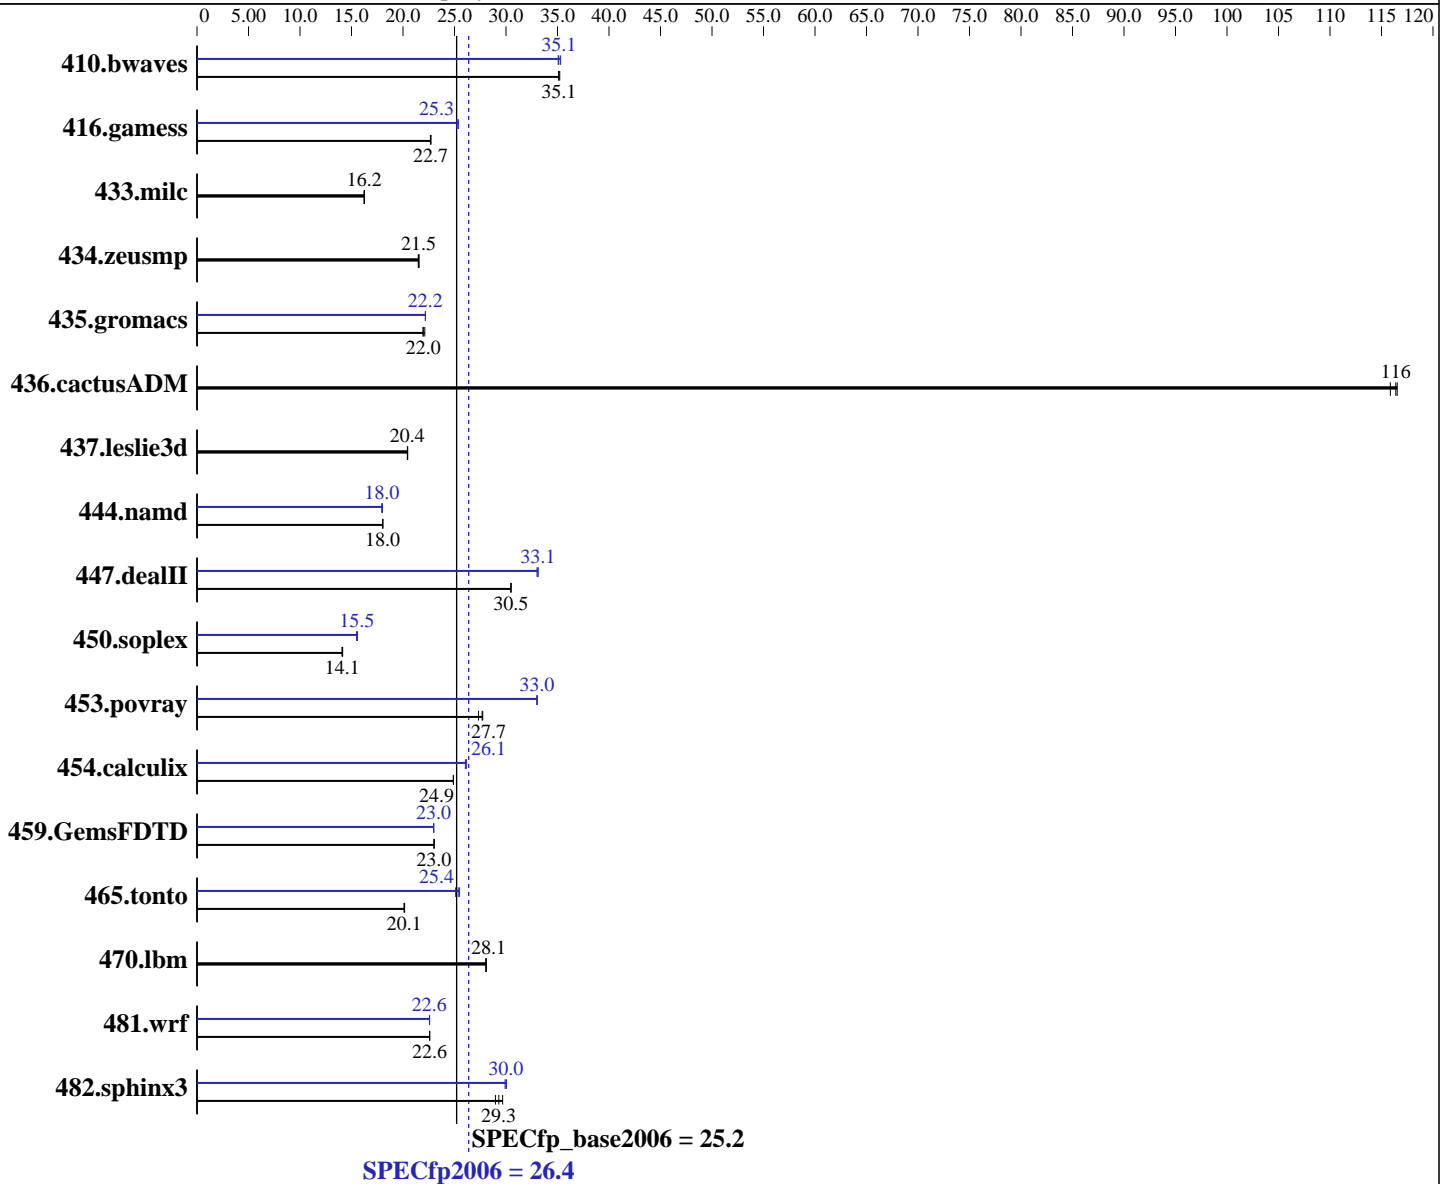

Hardware

CPU Name: Intel Xeon X5470
 CPU Characteristics: 3.33 GHz, 2x6 MB L2 shared, 1333 MHz system bus
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smpp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = **26.4**

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECfp_base2006 = **25.2**

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem: 1x146 GB 10 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	387	35.1	387	35.1	386	35.2	385	35.3	387	35.1	388	35.1
416.gamess	863	22.7	864	22.7	862	22.7	772	25.3	776	25.2	772	25.4
433.milc	566	16.2	565	16.2	565	16.2	566	16.2	565	16.2	565	16.2
434.zeusmp	422	21.6	423	21.5	424	21.5	422	21.6	423	21.5	424	21.5
435.gromacs	325	22.0	325	21.9	323	22.1	322	22.2	322	22.2	322	22.2
436.cactusADM	103	116	103	116	103	117	103	116	103	116	103	117
437.leslie3d	459	20.5	460	20.4	460	20.4	459	20.5	460	20.4	460	20.4
444.namd	445	18.0	445	18.0	445	18.0	447	18.0	446	18.0	447	18.0
447.dealII	375	30.5	375	30.5	375	30.5	346	33.1	346	33.1	347	33.0
450.soplex	590	14.1	592	14.1	591	14.1	535	15.6	538	15.5	537	15.5
453.povray	192	27.7	195	27.3	192	27.7	161	33.0	161	33.0	161	33.0
454.calculix	331	24.9	331	24.9	332	24.9	316	26.1	316	26.1	317	26.1
459.GemsFDTD	461	23.0	461	23.0	461	23.0	462	23.0	462	23.0	462	23.0
465.tonto	488	20.2	489	20.1	489	20.1	388	25.4	386	25.5	392	25.1
470.lbm	490	28.0	490	28.1	489	28.1	490	28.0	490	28.1	489	28.1
481.wrf	495	22.6	495	22.6	494	22.6	495	22.6	495	22.6	495	22.6
482.sphinx3	657	29.7	665	29.3	673	29.0	649	30.0	650	30.0	652	29.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

General Notes

All benchmarks compiled in 64-bit mode except 450.soplex, and 482.sphinx3, at peak, are compiled in 32-bit mode
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 26.4

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECfp_base2006 = 25.2

CPU2006 license: 3

Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECfp2006 = 26.4

SPECfp_base2006 = 25.2

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
             -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
             -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
            -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
            -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 26.4

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECfp_base2006 = 25.2

CPU2006 license: 3

Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch
-parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECfp2006 = 26.4

SPECfp_base2006 = 25.2

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.20090713.html>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.20090713.xml>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:52:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 October 2008.