



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp®2006 = 26.3

PRIMERGY RX300 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_base2006 = 25.1

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

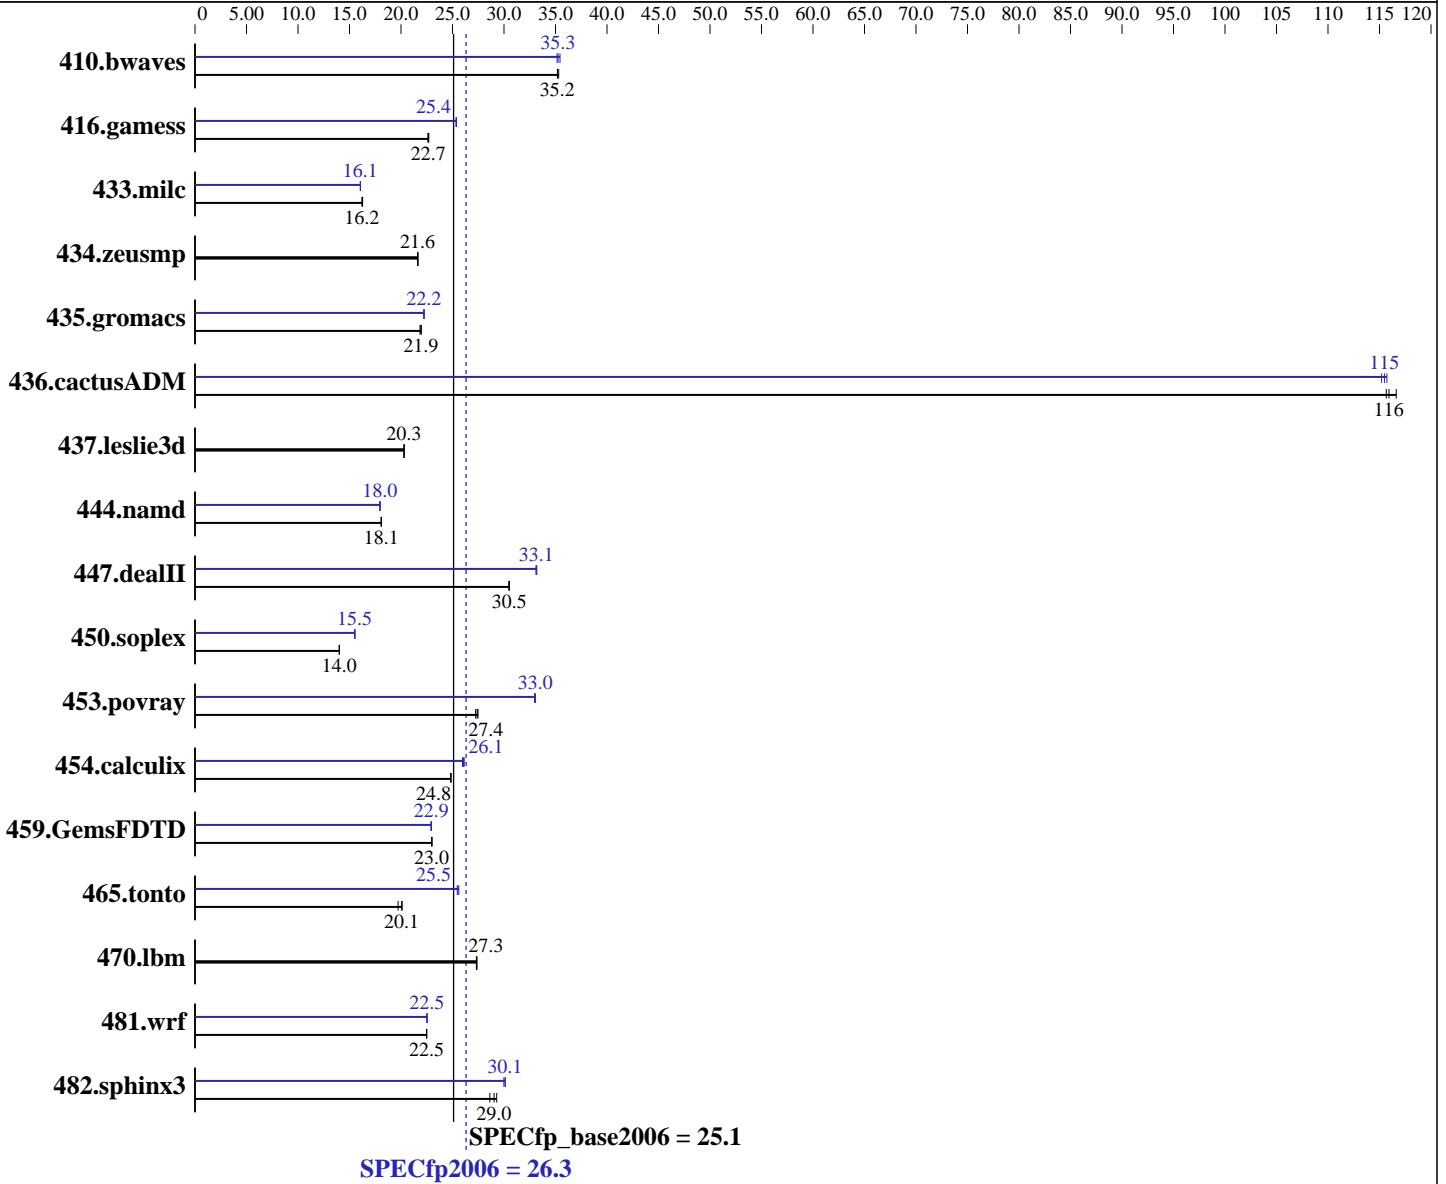

Hardware

CPU Name: Intel Xeon X5470
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cc_b_11.0.042, l_fc_b_11.0.042
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = **26.3**

PRIMERGY RX300 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_base2006 = **25.1**

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x SATA, 160 GB, 7200 rpm
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	386	35.2	385	35.3	386	35.2	383	35.4	387	35.1	385	35.3
416.gamess	866	22.6	864	22.7	863	22.7	772	25.4	771	25.4	772	25.4
433.milc	566	16.2	566	16.2	564	16.3	572	16.1	571	16.1	572	16.1
434.zeusmp	421	21.6	420	21.6	421	21.6	421	21.6	420	21.6	421	21.6
435.gromacs	325	22.0	326	21.9	327	21.8	321	22.3	322	22.2	321	22.2
436.cactusADM	102	117	103	116	103	116	103	116	103	115	104	115
437.leslie3d	463	20.3	463	20.3	463	20.3	463	20.3	463	20.3	463	20.3
444.namd	443	18.1	444	18.1	443	18.1	446	18.0	446	18.0	447	17.9
447.dealII	375	30.5	375	30.5	375	30.5	345	33.2	346	33.1	345	33.1
450.soplex	595	14.0	595	14.0	596	14.0	537	15.5	537	15.5	537	15.5
453.povray	194	27.5	195	27.2	194	27.4	161	33.0	161	33.0	161	33.0
454.calculix	332	24.8	332	24.9	332	24.8	318	26.0	316	26.1	316	26.1
459.GemsFDTD	461	23.0	462	23.0	461	23.0	463	22.9	463	22.9	463	22.9
465.tonto	489	20.1	499	19.7	490	20.1	384	25.6	386	25.5	386	25.5
470.lbm	503	27.3	503	27.3	502	27.4	503	27.3	503	27.3	502	27.4
481.wrf	496	22.5	497	22.5	497	22.5	496	22.5	496	22.5	496	22.5
482.sphinx3	681	28.6	671	29.0	665	29.3	647	30.1	647	30.1	650	30.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

All binaries were built with 64-bit mode except:
450.soplex and 482.sphinx3 in peak were built with 32-bit mode.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default)
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 26.3

PRIMERGY RX300 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_base2006 = 25.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

Platform Notes

BIOS configuration:

Hardware Prefetch = Enable, Adjacent Sector Prefetch = Enable

Memory Throttling = Enable

General Notes

For information about Fujitsu Siemens Computers please see:

<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 26.3

PRIMERGY RX300 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_base2006 = 25.1

CPU2006 license: 22

Test date: Sep-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 26.3

PRIMERGY RX300 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_base2006 = 25.1

CPU2006 license: 22

Test date: Sep-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 26.3

PRIMERGY RX300 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_base2006 = 25.1

CPU2006 license: 22

Test date: Sep-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.11.html>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.08.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.11.xml>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.08.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:16:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 October 2008.