



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp®2006 = 25.3

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp\_base2006 = 24.5

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2008

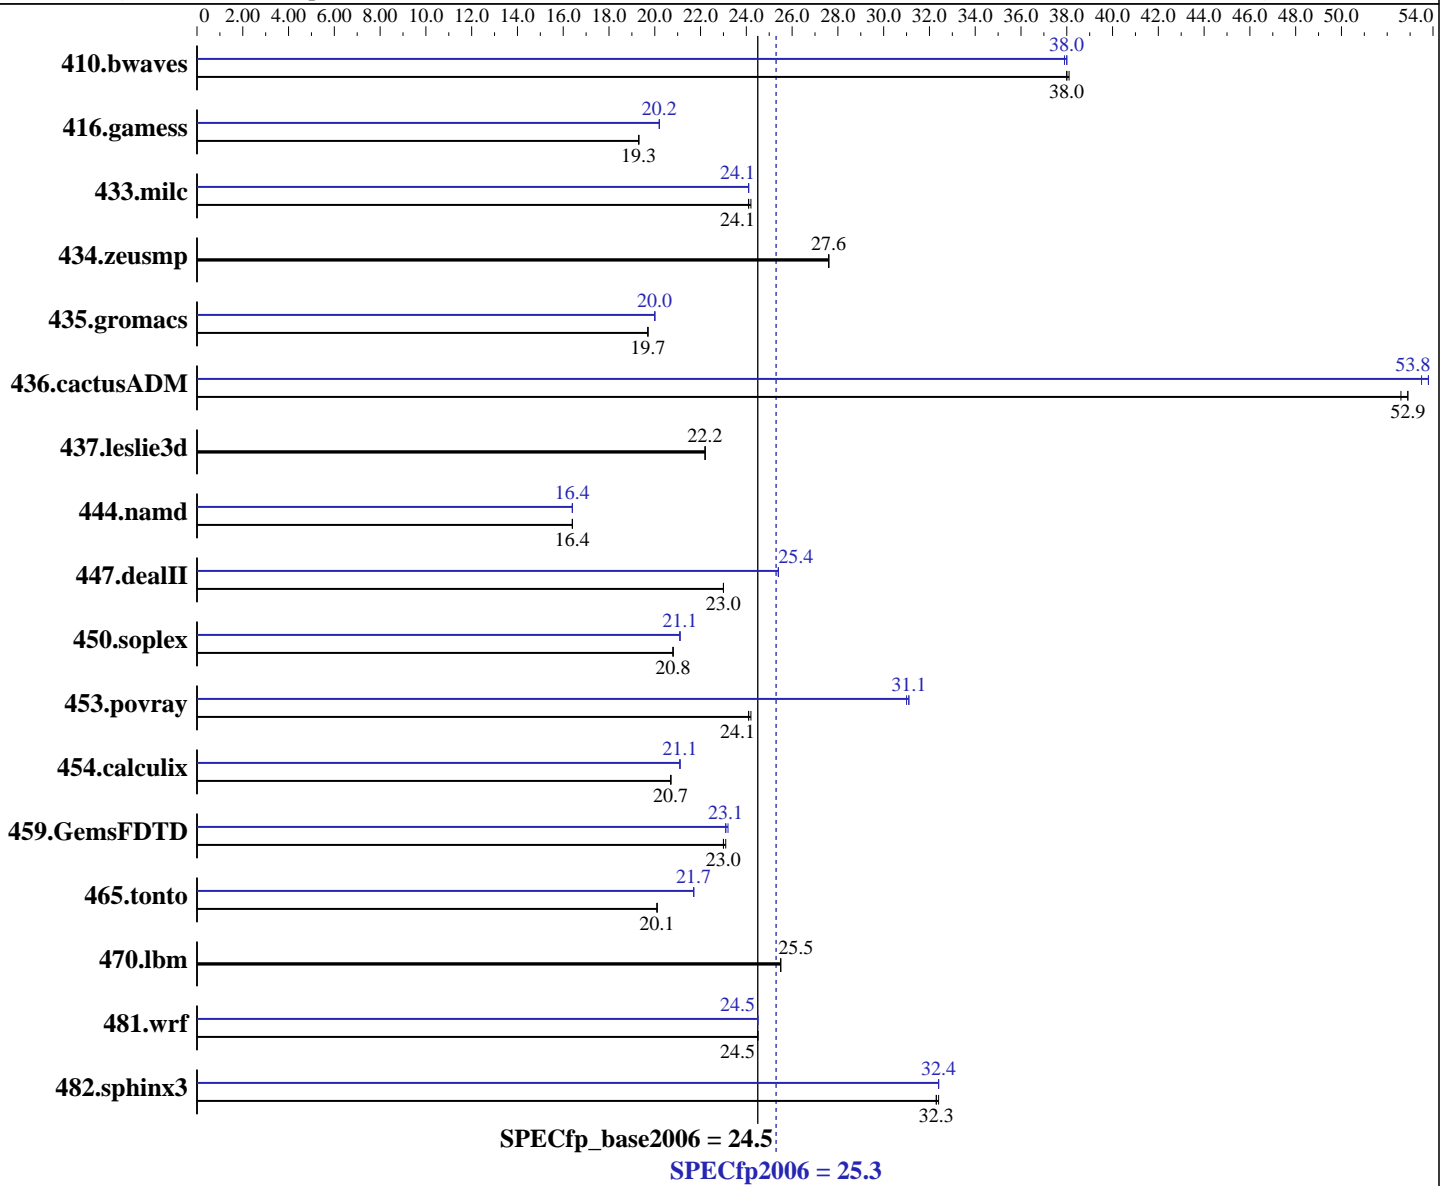

### Hardware

CPU Name: Intel Core 2 Extreme QX9770  
 CPU Characteristics:  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)  
 Compiler: Intel C++ Compiler Professional 11.0 for IA32  
 Build 20080930 Package ID: w\_cproc\_p\_11.0.054  
 Intel Visual Fortran Compiler Professional 11.0 for IA32  
 Build 20080930 Package ID: w\_cprof\_p\_11.0.054  
 Microsoft Visual Studio 2008 (for libraries)  
 Auto Parallel: Yes  
 File System: NTFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp2006 = **25.3**

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp\_base2006 = **24.5**

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Oct-2008  
Hardware Availability: Apr-2008  
Software Availability: Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 4 GB (4 x 1GB Corsair CM3X1024-1333C9DHX DDR3-1333 CL9)  
Disk Subsystem: 80 GB Intel X-25M SATA Solid-State Drive  
Other Hardware: None

System State: Default  
Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	358	38.0	357	38.1	<b>357</b>	<b>38.0</b>	359	37.9	357	38.0	<b>358</b>	<b>38.0</b>
416.gamess	1012	19.3	1013	19.3	<b>1012</b>	<b>19.3</b>	968	20.2	968	20.2	<b>968</b>	<b>20.2</b>
433.milc	380	24.2	<b>380</b>	<b>24.1</b>	380	24.1	381	24.1	<b>381</b>	<b>24.1</b>	381	24.1
434.zeusmp	330	27.6	330	27.6	<b>330</b>	<b>27.6</b>	330	27.6	330	27.6	<b>330</b>	<b>27.6</b>
435.gromacs	362	19.7	<b>363</b>	<b>19.7</b>	363	19.7	358	20.0	358	20.0	<b>358</b>	<b>20.0</b>
436.cactusADM	<b>226</b>	<b>52.9</b>	227	52.6	226	52.9	222	53.8	223	53.5	<b>222</b>	<b>53.8</b>
437.leslie3d	<b>423</b>	<b>22.2</b>	423	22.2	423	22.2	<b>423</b>	<b>22.2</b>	423	22.2	423	22.2
444.namd	488	16.4	<b>488</b>	<b>16.4</b>	488	16.4	488	16.4	<b>488</b>	<b>16.4</b>	488	16.4
447.dealII	<b>497</b>	<b>23.0</b>	497	23.0	497	23.0	450	25.4	450	25.4	<b>450</b>	<b>25.4</b>
450.soplex	<b>401</b>	<b>20.8</b>	401	20.8	401	20.8	<b>396</b>	<b>21.1</b>	396	21.1	395	21.1
453.povray	220	24.2	<b>221</b>	<b>24.1</b>	221	24.1	172	31.0	171	31.1	<b>171</b>	<b>31.1</b>
454.calculix	399	20.7	<b>399</b>	<b>20.7</b>	399	20.7	391	21.1	391	21.1	<b>391</b>	<b>21.1</b>
459.GemsFDTD	460	23.1	<b>461</b>	<b>23.0</b>	461	23.0	459	23.1	458	23.2	<b>459</b>	<b>23.1</b>
465.tonto	<b>490</b>	<b>20.1</b>	490	20.1	490	20.1	454	21.7	454	21.7	<b>454</b>	<b>21.7</b>
470.lbm	538	25.5	538	25.5	<b>538</b>	<b>25.5</b>	538	25.5	538	25.5	<b>538</b>	<b>25.5</b>
481.wrf	456	24.5	<b>455</b>	<b>24.5</b>	455	24.5	456	24.5	<b>455</b>	<b>24.5</b>	455	24.5
482.sphinx3	602	32.4	<b>603</b>	<b>32.3</b>	603	32.3	<b>601</b>	<b>32.4</b>	601	32.4	601	32.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply  
The system bus runs at 1600 MHz  
System was configured with nVidia GTX 280 discrete graphics card  
Binaries were built on Windows Vista Ultimate (32-bit)  
OMP\_NUM\_THREADS set to number of logical processors as seen by the OS  
KMP\_AFFINITY set to physical,0

## Base Compiler Invocation

C benchmarks:  
icl -Qvc9 -Qc99

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp2006 = 25.3

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp\_base2006 = 24.5

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Oct-2008  
Hardware Availability: Apr-2008  
Software Availability: Nov-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icl -Qvc9  
  
Fortran benchmarks:  
ifort  
  
Benchmarks using both Fortran and C:  
icl -Qvc9 -Qc99 ifort

## Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Base Optimization Flags

C benchmarks:  
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch  
/F1000000000  
  
C++ benchmarks:  
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch  
-Qcxx-features /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE  
  
Fortran benchmarks:  
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch  
/F1000000000  
  
Benchmarks using both Fortran and C:  
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch  
/F1000000000

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc9 -Qc99  
  
C++ benchmarks:  
icl -Qvc9

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp2006 = 25.3

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp\_base2006 = 24.5

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Oct-2008  
Hardware Availability: Apr-2008  
Software Availability: Nov-2008

## Peak Compiler Invocation (Continued)

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icl -Qvc9 -Qc99 ifort

## Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Peak Optimization Flags

C benchmarks:

433.milc: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: basepeak = yes

482.sphinx3: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE

447.dealII: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch  
-Qansi-alias -Qscalar-rep- /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE

450.soplex: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE

453.povray: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000  
shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
(Test Sponsor: Intel Corporation)

**SPECfp2006 = 25.3**

**Asus P5E3 Premium (Intel Core 2 Extreme QX9770)**

**SPECfp\_base2006 = 24.5**

**CPU2006 license:** 13  
**Test sponsor:** Intel Corporation  
**Tested by:** Intel Corporation

**Test date:** Oct-2008  
**Hardware Availability:** Apr-2008  
**Software Availability:** Nov-2008

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel /F1000000000

416.gamess: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch -Qparallel /F1000000000

465.tonto: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel /F1000000000

454.calculix: -QxSSE4.1 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel /F1000000000

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.html>

<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.xml>

<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
(Test Sponsor: Intel Corporation)

**SPECfp2006 = 25.3**

**Asus P5E3 Premium (Intel Core 2 Extreme QX9770)**

**SPECfp\_base2006 = 24.5**

**CPU2006 license:** 13  
**Test sponsor:** Intel Corporation  
**Tested by:** Intel Corporation

**Test date:** Oct-2008  
**Hardware Availability:** Apr-2008  
**Software Availability:** Nov-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 20:13:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 November 2008.