SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

Asus P6T Deluxe (Intel Core i7-965 Extreme Edition)

SPECfp®2006 = 33.6

SPECfp_base2006 = 31.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

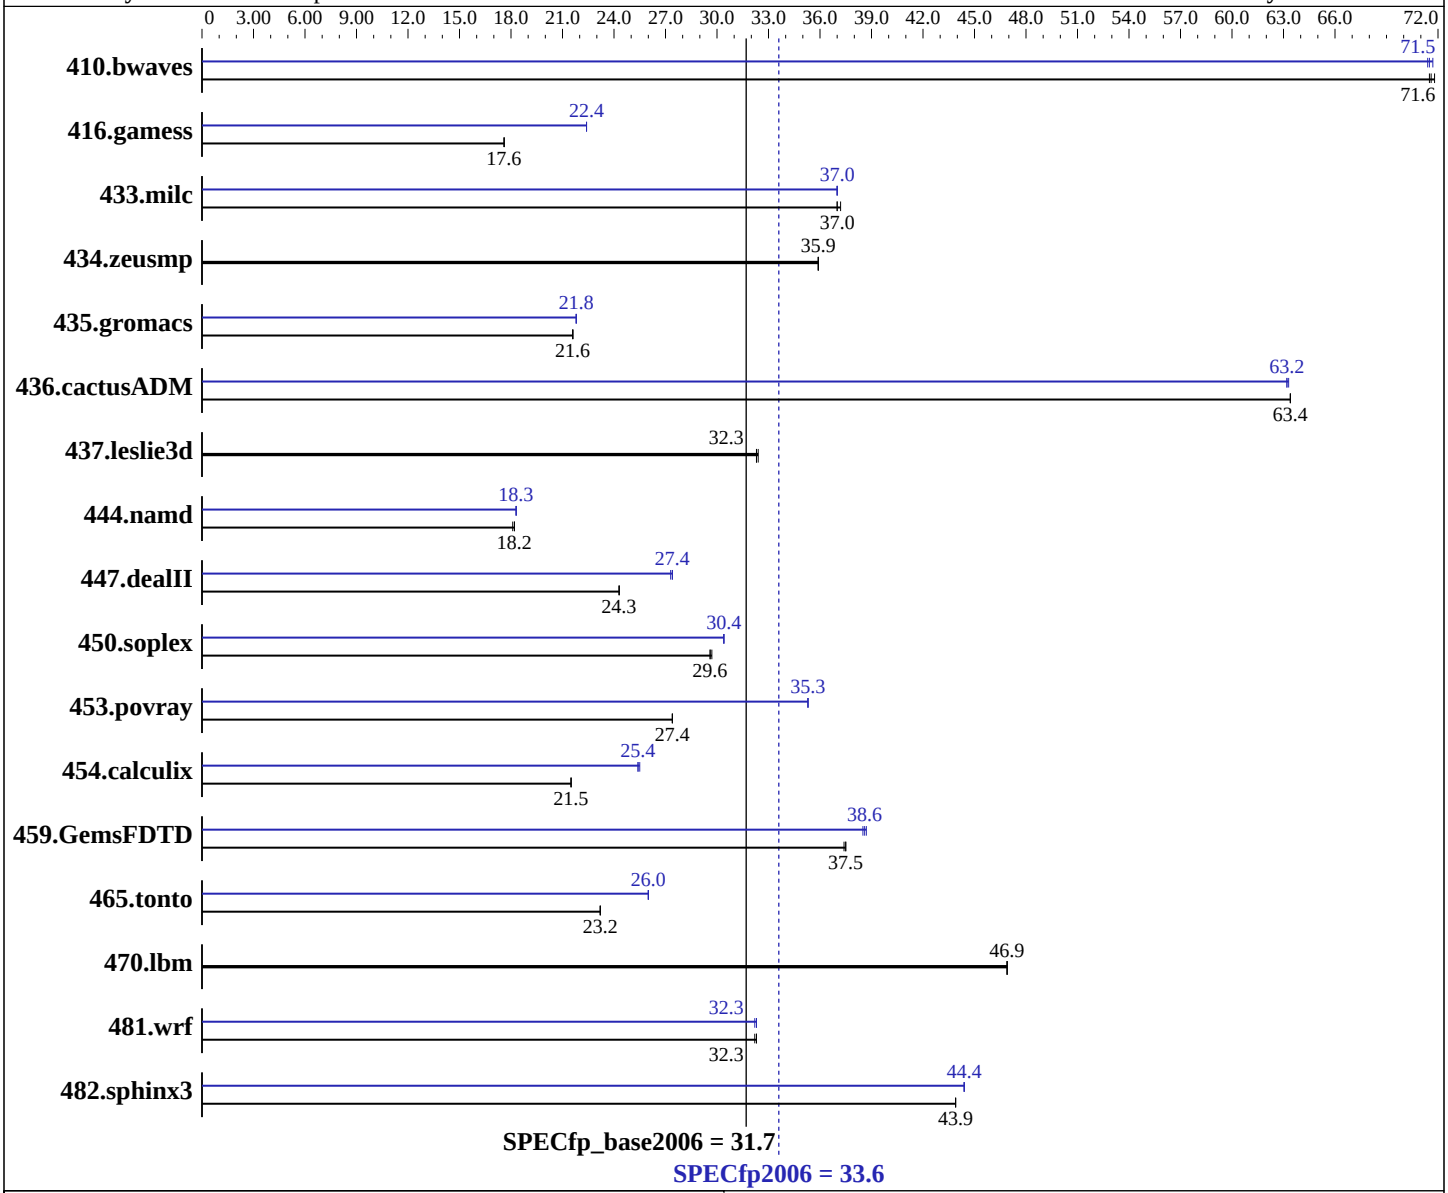

Hardware

CPU Name:	Intel Core i7-965 Extreme Edition
CPU Characteristics:	Intel Turbo Boost Technology up to 3.46 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cproc_p_11.0.054 Intel Visual Fortran Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cprof_p_11.0.054 Microsoft Visual Studio 2008 (for libraries)
Auto Parallel:	Yes
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

Asus P6T Deluxe (Intel Core i7-965 Extreme Edition)

SPECfp2006 = 33.6

SPECfp_base2006 = 31.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 12 GB (6 x 2GB Samsung M378B5673DZ1-CF8 DDR3-1066 CL7)
Disk Subsystem: 80 GB Intel X-25M SATA Solid-State Drive
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: SmartHeap Library Version 8.1 from http://www.microquill.com/

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	189	71.8	**190**	**71.6**	190	71.5	**190**	**71.5**	190	71.4	190	71.7
416.gamess	**1115**	**17.6**	1116	17.6	1114	17.6	874	22.4	**875**	**22.4**	875	22.4
433.milc	**248**	**37.0**	247	37.2	248	37.0	**248**	**37.0**	248	37.0	248	37.0
434.zeusmp	254	35.9	254	35.9	**254**	**35.9**	254	35.9	254	35.9	**254**	**35.9**
435.gromacs	331	21.6	331	21.6	**331**	**21.6**	328	21.8	**328**	**21.8**	328	21.8
436.cactusADM	188	63.4	**188**	**63.4**	188	63.4	189	63.2	189	63.3	**189**	**63.2**
437.leslie3d	**291**	**32.3**	291	32.4	291	32.3	**291**	**32.3**	291	32.4	291	32.3
444.namd	442	18.1	442	18.2	**442**	**18.2**	438	18.3	439	18.3	**439**	**18.3**
447.dealII	471	24.3	471	24.3	**471**	**24.3**	419	27.3	**418**	**27.4**	417	27.4
450.soplex	281	29.7	282	29.6	**281**	**29.6**	**274**	**30.4**	274	30.4	274	30.4
453.povray	194	27.4	**194**	**27.4**	194	27.4	**151**	**35.3**	151	35.3	151	35.3
454.calculix	383	21.5	**384**	**21.5**	384	21.5	**324**	**25.4**	324	25.5	324	25.4
459.GemsFDTD	**283**	**37.5**	283	37.4	283	37.5	**275**	**38.6**	276	38.5	275	38.7
465.tonto	424	23.2	**424**	**23.2**	424	23.2	**378**	**26.0**	378	26.0	378	26.0
470.lbm	293	46.9	293	46.9	**293**	**46.9**	293	46.9	293	46.9	**293**	**46.9**
481.wrf	**346**	**32.3**	347	32.2	346	32.3	346	32.3	346	32.2	**346**	**32.3**
482.sphinx3	**444**	**43.9**	444	43.9	444	43.9	439	44.4	439	44.4	**439**	**44.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
System was configured with nVidia GTX 280 discrete graphics card
Binaries were built on Windows Vista Ultimate (32-bit)
OMP_NUM_THREADS set to number of logical processors as seen by the OS
KMP_AFFINITY set to physical,0
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qc99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qcxx-features /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99

C++ benchmarks:
icl -Qvc9

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: basepeak = yes

482.sphinx3: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

447.dealII: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qansi-alias -Qscalar-rep- /F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel /F1000000000

416.gamess: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch -Qparallel /F1000000000

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel /F1000000000

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel /F1000000000

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.html
http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.xml
http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:10:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2008.