



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T860 E1  
(Intel Xeon X5470, 3.33 GHz)

SPECfp<sup>®</sup>2006 = 26.2

SPECfp\_base2006 = 25.0

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Nov-2008

Hardware Availability: Oct-2008

Software Availability: Nov-2008

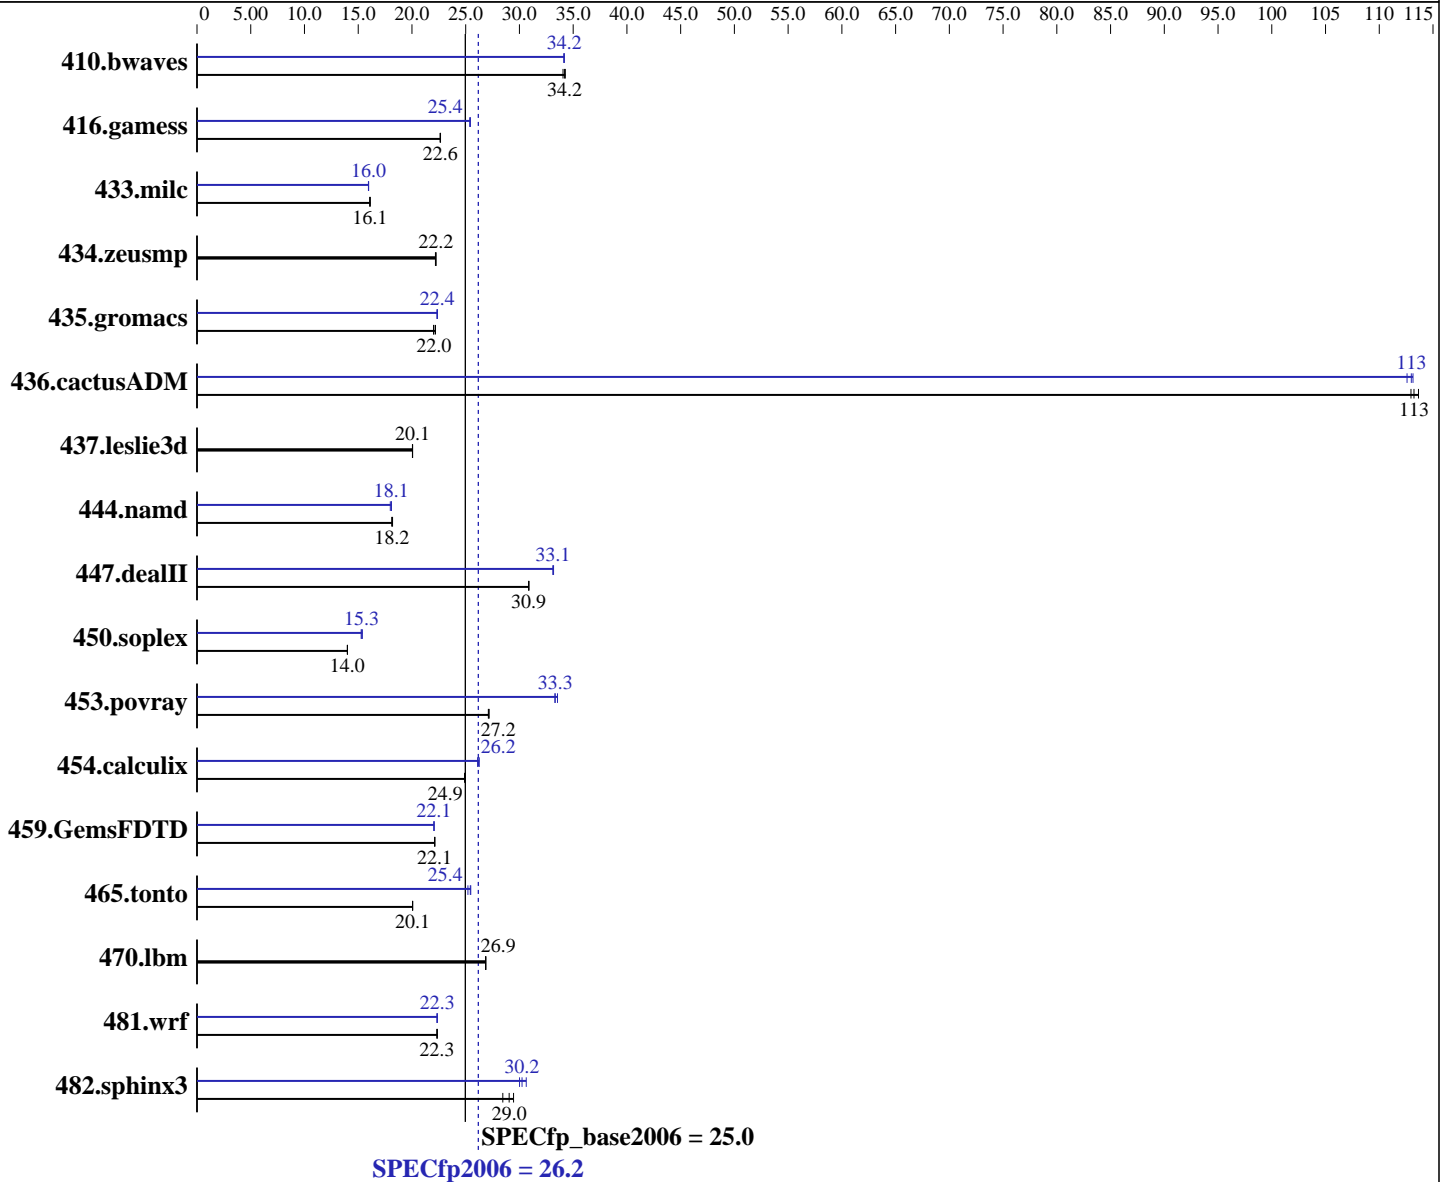

### Hardware

CPU Name: Intel Xeon X5470  
 CPU Characteristics: 3.33 GHz, 2x6 MB L2 shared, 1333 MHz system bus  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smpp  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.044, l\_fproc\_b\_11.0.044  
 Auto Parallel: Yes  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T860 E1  
(Intel Xeon X5470, 3.33 GHz)

SPECfp2006 = 26.2

SPECfp\_base2006 = 25.0

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Nov-2008  
Hardware Availability: Oct-2008  
Software Availability: Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
Disk Subsystem: 1x73.2 GB SAS, 15000RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	399	34.1	<b><u>397</u></b>	<b><u>34.2</u></b>	397	34.3	398	34.1	398	34.2	<b><u>398</u></b>	<b><u>34.2</u></b>
416.gamess	866	22.6	<b><u>864</u></b>	<b><u>22.6</u></b>	864	22.7	<b><u>770</u></b>	<b><u>25.4</u></b>	771	25.4	770	25.4
433.milc	569	16.1	571	16.1	<b><u>571</u></b>	<b><u>16.1</u></b>	575	16.0	<b><u>575</u></b>	<b><u>16.0</u></b>	576	16.0
434.zeusmp	409	22.2	410	22.2	<b><u>409</u></b>	<b><u>22.2</u></b>	409	22.2	410	22.2	<b><u>409</u></b>	<b><u>22.2</u></b>
435.gromacs	324	22.0	<b><u>324</u></b>	<b><u>22.0</u></b>	322	22.2	320	22.3	319	22.4	<b><u>319</u></b>	<b><u>22.4</u></b>
436.cactusADM	106	113	<b><u>106</u></b>	<b><u>113</u></b>	105	114	106	113	106	113	<b><u>106</u></b>	<b><u>113</u></b>
437.leslie3d	469	20.1	<b><u>469</u></b>	<b><u>20.1</u></b>	469	20.0	469	20.1	<b><u>469</u></b>	<b><u>20.1</u></b>	469	20.0
444.namd	443	18.1	<b><u>442</u></b>	<b><u>18.2</u></b>	441	18.2	443	18.1	446	18.0	<b><u>444</u></b>	<b><u>18.1</u></b>
447.dealII	371	30.9	371	30.9	<b><u>371</u></b>	<b><u>30.9</u></b>	<b><u>345</u></b>	<b><u>33.1</u></b>	345	33.2	345	33.1
450.soplex	<b><u>596</u></b>	<b><u>14.0</u></b>	596	14.0	596	14.0	546	15.3	<b><u>544</u></b>	<b><u>15.3</u></b>	542	15.4
453.povray	196	27.2	196	27.1	<b><u>196</u></b>	<b><u>27.2</u></b>	160	33.3	159	33.5	<b><u>160</u></b>	<b><u>33.3</u></b>
454.calculix	<b><u>331</u></b>	<b><u>24.9</u></b>	331	24.9	331	24.9	314	26.3	<b><u>315</u></b>	<b><u>26.2</u></b>	316	26.1
459.GemsFDTD	<b><u>480</u></b>	<b><u>22.1</u></b>	480	22.1	480	22.1	481	22.0	<b><u>481</u></b>	<b><u>22.1</u></b>	481	22.1
465.tonto	490	20.1	<b><u>491</u></b>	<b><u>20.1</u></b>	491	20.1	390	25.2	<b><u>387</u></b>	<b><u>25.4</u></b>	386	25.5
470.lbm	512	26.8	<b><u>512</u></b>	<b><u>26.9</u></b>	511	26.9	512	26.8	<b><u>512</u></b>	<b><u>26.9</u></b>	511	26.9
481.wrf	500	22.3	<b><u>500</u></b>	<b><u>22.3</u></b>	500	22.4	500	22.4	500	22.3	<b><u>500</u></b>	<b><u>22.3</u></b>
482.sphinx3	685	28.5	662	29.5	<b><u>671</u></b>	<b><u>29.0</u></b>	636	30.6	<b><u>644</u></b>	<b><u>30.2</u></b>	649	30.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 200M

## Platform Notes

Bios settings:  
Hardware Prefetcher: Enabled  
Adjacent Cache Line Prefetch: Enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T860 E1  
(Intel Xeon X5470, 3.33 GHz)

SPECfp2006 = 26.2

SPECfp\_base2006 = 25.0

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Nov-2008

Hardware Availability: Oct-2008

Software Availability: Nov-2008

## General Notes

The NEC Express5800/120Lj(Intel Xeon X5470) and the Bull NovaScale T860 E1(Intel Xeon X5470, 3.33 GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/120Lj(Intel Xeon X5470) model.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T860 E1  
(Intel Xeon X5470, 3.33 GHz)

SPECfp2006 = 26.2

SPECfp\_base2006 = 25.0

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Nov-2008

Hardware Availability: Oct-2008

Software Availability: Nov-2008

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/044/bin/ia32/icc  
-L/opt/intel/Compiler/11.0/044/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/044/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/044/bin/ia32/icpc  
-L/opt/intel/Compiler/11.0/044/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/044/ipp/ia32/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T860 E1  
(Intel Xeon X5470, 3.33 GHz)

SPECfp2006 = 26.2

SPECfp\_base2006 = 25.0

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** NEC Corporation

**Test date:** Nov-2008  
**Hardware Availability:** Oct-2008  
**Software Availability:** Nov-2008

## Peak Optimization Flags

### C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-  
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -ansi-alias  
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch  
-parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T860 E1  
(Intel Xeon X5470, 3.33 GHz)

SPECfp2006 = 26.2

SPECfp\_base2006 = 25.0

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Nov-2008

Hardware Availability: Oct-2008

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -opt-prefetch -parallel  
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 22:51:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 January 2009.