



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS


NovaScale R480 E1  
(Intel Xeon E7310, 1.60 GHz)

SPECfp®\_rate2006 = 86.5

SPECfp\_rate\_base2006 = 83.6

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Dec-2008  
Hardware Availability: Nov-2008  
Software Availability: Nov-2008

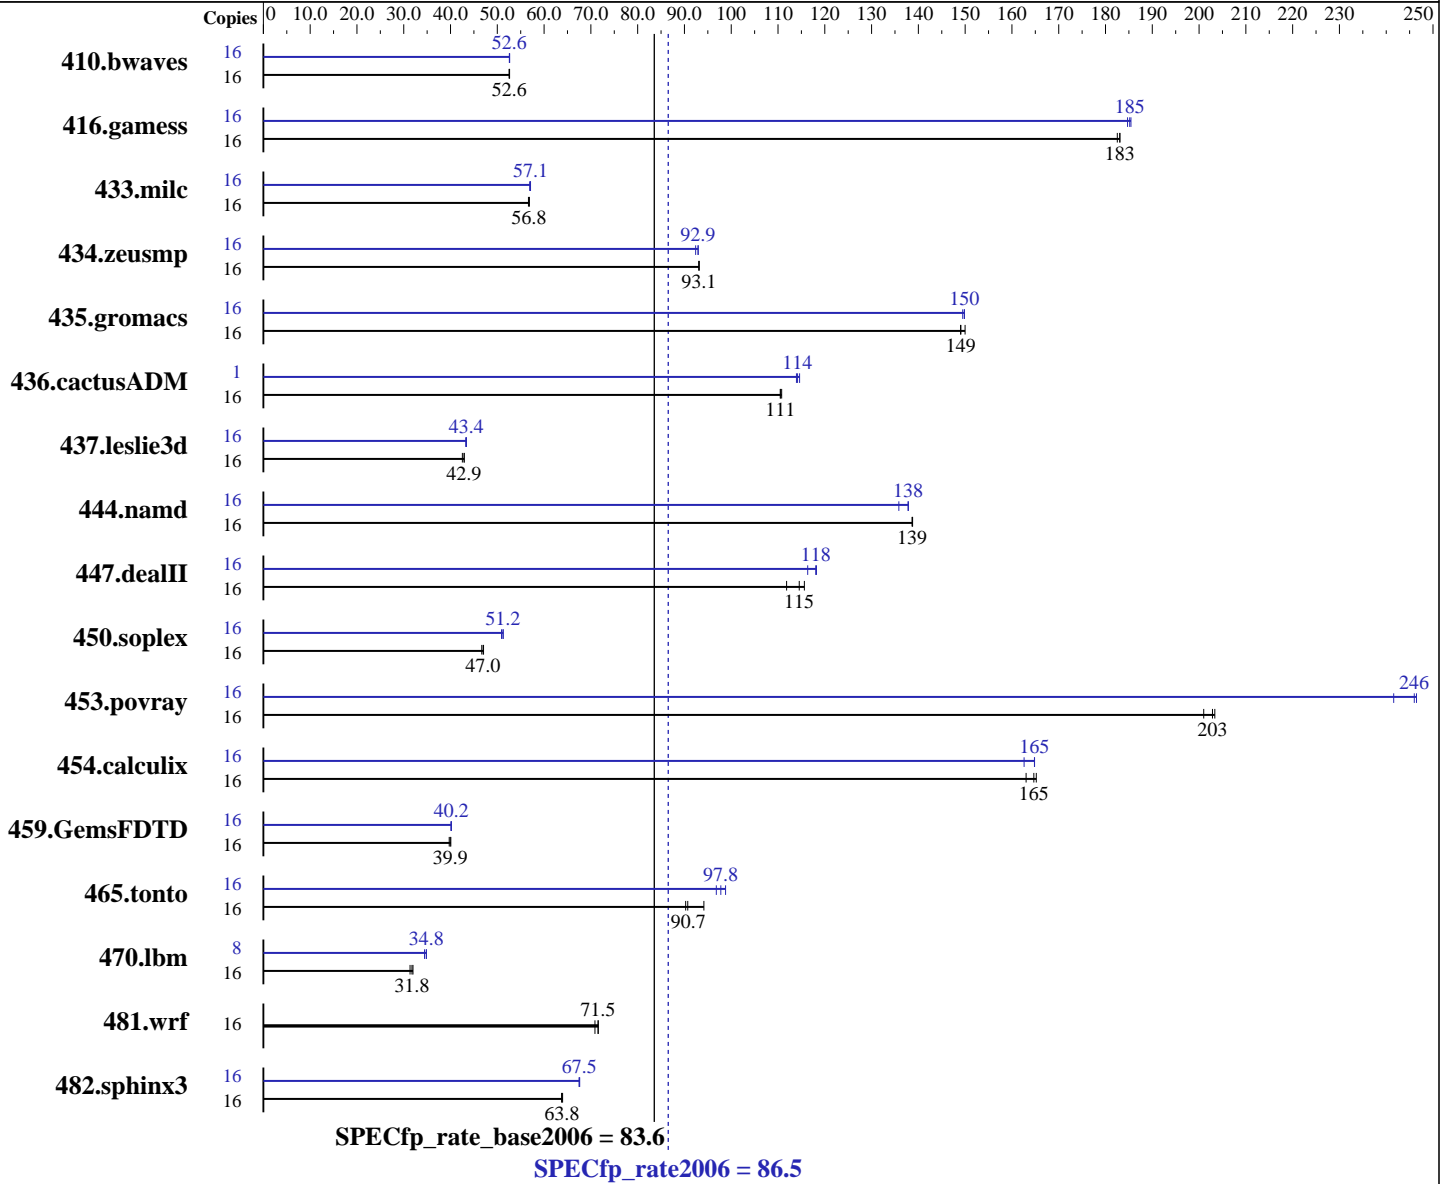

### Hardware

CPU Name: Intel Xeon E7310  
CPU Characteristics: 1066 MHz system bus  
CPU MHz: 1600  
FPU: Integrated  
CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
CPU(s) orderable: 1,2,3,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20081105 Package ID: l\_cproc\_p\_11.0.074, l\_cprof\_p\_11.0.074  
Auto Parallel: Yes  
File System: ext2  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R480 E1  
(Intel Xeon E7310, 1.60 GHz)

SPECfp\_rate2006 = 86.5

SPECfp\_rate\_base2006 = 83.6

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Dec-2008  
Hardware Availability: Nov-2008  
Software Availability: Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 32 GB (16x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
Disk Subsystem: 1x73.2 GB SAS, 15000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>4137</b>	<b>52.6</b>	4139	52.5	4132	52.6	16	<b>4134</b>	<b>52.6</b>	4130	52.6	4135	52.6
416.gamess	16	1711	183	<b>1712</b>	<b>183</b>	1716	183	16	1696	185	<b>1692</b>	<b>185</b>	1689	185
433.milc	16	2592	56.7	<b>2586</b>	<b>56.8</b>	2584	56.8	16	2581	56.9	<b>2573</b>	<b>57.1</b>	2572	57.1
434.zeusmp	16	1564	93.1	1564	93.1	<b>1564</b>	<b>93.1</b>	16	<b>1567</b>	<b>92.9</b>	1566	92.9	1576	92.4
435.gromacs	16	762	150	<b>766</b>	<b>149</b>	767	149	16	762	150	764	149	<b>762</b>	<b>150</b>
436.cactusADM	16	<b>1729</b>	<b>111</b>	1731	110	1726	111	1	<b>105</b>	<b>114</b>	104	115	105	114
437.leslie3d	16	3536	42.5	<b>3505</b>	<b>42.9</b>	3504	42.9	16	3477	43.3	<b>3466</b>	<b>43.4</b>	3465	43.4
444.namd	16	925	139	925	139	<b>925</b>	<b>139</b>	16	<b>931</b>	<b>138</b>	931	138	945	136
447.dealII	16	<b>1598</b>	<b>115</b>	1583	116	1637	112	16	1573	116	1548	118	<b>1550</b>	<b>118</b>
450.soplex	16	2859	46.7	<b>2841</b>	<b>47.0</b>	2836	47.1	16	2622	50.9	2603	51.3	<b>2606</b>	<b>51.2</b>
453.povray	16	419	203	423	201	<b>420</b>	<b>203</b>	16	345	246	<b>346</b>	<b>246</b>	352	242
454.calculix	16	810	163	<b>802</b>	<b>165</b>	799	165	16	<b>801</b>	<b>165</b>	812	163	801	165
459.GemsFDTD	16	4274	39.7	<b>4251</b>	<b>39.9</b>	4237	40.1	16	4235	40.1	4223	40.2	<b>4225</b>	<b>40.2</b>
465.tonto	16	1672	94.2	1744	90.3	<b>1736</b>	<b>90.7</b>	16	1594	98.8	1626	96.8	<b>1610</b>	<b>97.8</b>
470.lbm	16	7012	31.4	<b>6923</b>	<b>31.8</b>	6875	32.0	8	3191	34.4	<b>3156</b>	<b>34.8</b>	3156	34.8
481.wrf	16	2522	70.9	<b>2499</b>	<b>71.5</b>	2497	71.6	16	2522	70.9	<b>2499</b>	<b>71.5</b>	2497	71.6
482.sphinx3	16	4876	64.0	4892	63.7	<b>4885</b>	<b>63.8</b>	16	4620	67.5	<b>4618</b>	<b>67.5</b>	4612	67.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind processes to cores except  
for 436.cactusADM peak

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 64M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R480 E1  
(Intel Xeon E7310, 1.60 GHz)

SPECfp\_rate2006 = 86.5

SPECfp\_rate\_base2006 = 83.6

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Dec-2008  
Hardware Availability: Nov-2008  
Software Availability: Nov-2008

### Platform Notes

Bios settings:  
Hardware Prefetcher: Disabled  
Adjacent Cache Line Prefetch: Disabled  
FSB High Bandwidth Optimization: Enabled

### General Notes

The NEC Express5800/R140a-4(Intel Xeon E7310) and the Bull NovaScale R480 E1(Intel Xeon E7310, 1.60 GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/R140a-4(Intel Xeon E7310) model.

### Base Compiler Invocation

C benchmarks:  
icc  
  
C++ benchmarks:  
icpc  
  
Fortran benchmarks:  
ifort  
  
Benchmarks using both Fortran and C:  
icc ifort

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R480 E1  
(Intel Xeon E7310, 1.60 GHz)

SPECfp\_rate2006 = 86.5

SPECfp\_rate\_base2006 = 83.6

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Dec-2008  
Hardware Availability: Nov-2008  
Software Availability: Nov-2008

## Base Optimization Flags

C benchmarks:  
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:  
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:  
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

482.sphinx3: /opt/intel/Compiler/11.0/074/bin/ia32/icc  
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

C++ benchmarks (except as noted below):  
icpc

450.soplex: /opt/intel/Compiler/11.0/074/bin/ia32/icpc  
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

Fortran benchmarks (except as noted below):  
ifort

437.leslie3d: /opt/intel/Compiler/11.0/074/bin/ia32/ifort  
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

Benchmarks using both Fortran and C:  
icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R480 E1  
(Intel Xeon E7310, 1.60 GHz)

SPECfp\_rate2006 = 86.5

SPECfp\_rate\_base2006 = 83.6

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Dec-2008  
Hardware Availability: Nov-2008  
Software Availability: Nov-2008

## Peak Portability Flags (Continued)

```
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

### C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias
470.lbm: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32
482.sphinx3: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2
```

### C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32
447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-
450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-malloc-options=3
453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias
```

### Fortran benchmarks:

```
410.bwaves: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-
434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R480 E1  
(Intel Xeon E7310, 1.60 GHz)

SPECfp\_rate2006 = 86.5

SPECfp\_rate\_base2006 = 83.6

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Dec-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -opt-prefetch -parallel  
-auto-ilp32

454.calculix: -xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.20090710.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.20090710.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 22:25:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 January 2009.