



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECfp®\_rate2006 = 118

ProLiant DL585 G5  
(2.8 GHz AMD Opteron 8386 SE)

### SPECfp\_rate\_base2006 = 107

CPU2006 license: 3


Test date: Jan-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2009

Tested by: Hewlett-Packard Company

Software Availability: Dec-2008

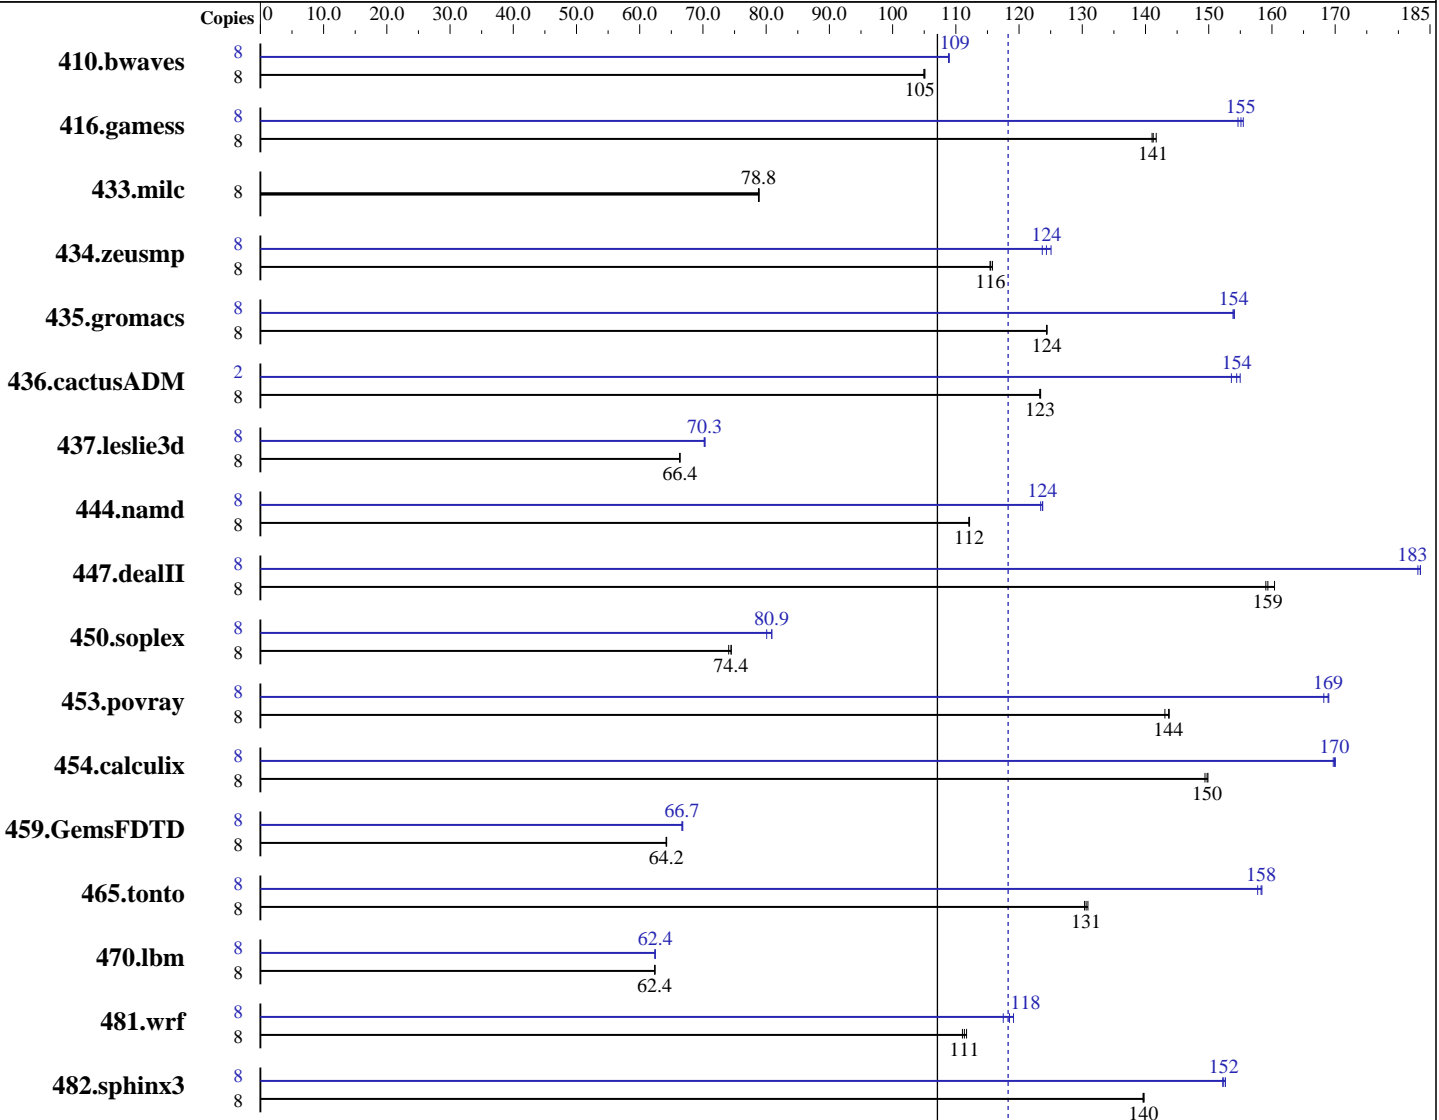

SPECfp\_rate\_base2006 = 107

SPECfp\_rate2006 = 118

### Hardware

CPU Name: AMD Opteron 8386 SE  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 5.2, Kernel 2.6.18-92.el5  
 Compiler: PGI Server Complete Version 8.0  
 PathScale Compiler Suite Version 3.2  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 118

ProLiant DL585 G5  
(2.8 GHz AMD Opteron 8386 SE)

SPECfp\_rate\_base2006 = 107

CPU2006 license: 3

Test date: Jan-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2009

Tested by: Hewlett-Packard Company

Software Availability: Dec-2008

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (8x4 GB, PC2-6400P CL5)  
Disk Subsystem: 1x146 GB 15 K SAS  
Other Hardware: None

Other Software: binutils 2.18  
32-bit and 64-bit libhugetlbfs libraries

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1035	105	<b><u>1035</u></b>	<b><u>105</u></b>	1036	105	8	998	109	999	109	<b><u>998</u></b>	<b><u>109</u></b>
416.gamess	8	1105	142	1111	141	<b><u>1109</u></b>	<b><u>141</u></b>	8	1008	155	<b><u>1010</u></b>	<b><u>155</u></b>	1013	155
433.milc	8	<b><u>932</u></b>	<b><u>78.8</u></b>	931	78.9	932	78.8	8	<b><u>932</u></b>	<b><u>78.8</u></b>	931	78.9	932	78.8
434.zeusmp	8	<b><u>630</u></b>	<b><u>116</u></b>	631	115	629	116	8	<b><u>586</u></b>	<b><u>124</u></b>	589	124	582	125
435.gromacs	8	459	124	459	124	<b><u>459</u></b>	<b><u>124</u></b>	8	<b><u>371</u></b>	<b><u>154</u></b>	371	154	371	154
436.cactusADM	8	775	123	776	123	<b><u>775</u></b>	<b><u>123</u></b>	2	<b><u>155</u></b>	<b><u>154</u></b>	156	154	154	155
437.leslie3d	8	1133	66.4	1133	66.3	<b><u>1133</u></b>	<b><u>66.4</u></b>	8	1071	70.2	1069	70.3	<b><u>1070</u></b>	<b><u>70.3</u></b>
444.namd	8	573	112	<b><u>572</u></b>	<b><u>112</u></b>	572	112	8	520	123	<b><u>519</u></b>	<b><u>124</u></b>	518	124
447.dealII	8	575	159	<b><u>574</u></b>	<b><u>159</u></b>	571	160	8	500	183	<b><u>499</u></b>	<b><u>183</u></b>	499	183
450.soplex	8	901	74.1	<b><u>896</u></b>	<b><u>74.4</u></b>	896	74.5	8	833	80.1	825	80.9	<b><u>825</u></b>	<b><u>80.9</u></b>
453.povray	8	<b><u>296</u></b>	<b><u>144</u></b>	296	144	297	143	8	253	168	<b><u>252</u></b>	<b><u>169</u></b>	252	169
454.calculix	8	<b><u>441</u></b>	<b><u>150</u></b>	440	150	442	149	8	<b><u>388</u></b>	<b><u>170</u></b>	389	170	388	170
459.GemsFDTD	8	1323	64.2	1321	64.3	<b><u>1322</u></b>	<b><u>64.2</u></b>	8	<b><u>1272</u></b>	<b><u>66.7</u></b>	1270	66.8	1273	66.7
465.tonto	8	<b><u>603</u></b>	<b><u>131</u></b>	601	131	604	130	8	<b><u>497</u></b>	<b><u>158</u></b>	497	158	499	158
470.lbm	8	<b><u>1762</u></b>	<b><u>62.4</u></b>	1761	62.4	1762	62.4	8	1762	62.4	<b><u>1760</u></b>	<b><u>62.4</u></b>	1760	62.5
481.wrf	8	805	111	800	112	<b><u>802</u></b>	<b><u>111</u></b>	8	750	119	<b><u>754</u></b>	<b><u>118</u></b>	760	118
482.sphinx3	8	1117	140	<b><u>1116</u></b>	<b><u>140</u></b>	1115	140	8	1021	153	<b><u>1023</u></b>	<b><u>152</u></b>	1024	152

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

Environment stack size set to 'unlimited'  
Max locked memory set to 2097152  
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.  
PGI\_HUGE\_PAGES set to 896.  
Total number of huge pages available is 7168.  
NCPUS set to number of cores



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 118**

ProLiant DL585 G5  
(2.8 GHz AMD Opteron 8386 SE)

**SPECfp\_rate\_base2006 = 107**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jan-2009  
**Hardware Availability:** Jan-2009  
**Software Availability:** Dec-2008

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_MORECORE = "yes"  
NCPUS = "4"

## Base Compiler Invocation

C benchmarks:  
pgcc  
  
C++ benchmarks:  
pgcpp  
  
Fortran benchmarks:  
pgf95  
  
Benchmarks using both Fortran and C:  
pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 118**

ProLiant DL585 G5  
(2.8 GHz AMD Opteron 8386 SE)

**SPECfp\_rate\_base2006 = 107**

**CPU2006 license:** 3

**Test date:** Jan-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2008

## Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 118**

ProLiant DL585 G5  
(2.8 GHz AMD Opteron 8386 SE)

**SPECfp\_rate\_base2006 = 107**

**CPU2006 license:** 3

**Test date:** Jan-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2008

## Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64

436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

454.calculix: -DSPEC\_CPU\_LP64 -Mnomain

459.GemsFDTD: -DSPEC\_CPU\_LP64

465.tonto: -DSPEC\_CPU\_LP64

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore

482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge

-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)

-Mipa=fast(pass 2) -Mipa=inline(pass 2)

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 118**

ProLiant DL585 G5  
(2.8 GHz AMD Opteron 8386 SE)

**SPECfp\_rate\_base2006 = 107**

**CPU2006 license:** 3

**Test date:** Jan-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2008

## Peak Optimization Flags (Continued)

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse  
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepch  
-Mfprelaxed --zc\_eh -tp barcelona-64 -Bstatic\_pgi

447.deallI: -march=barcelona -Ofast -INLINE:aggressive=on -LNO:opt=0  
-OPT:alias=disjoint -fno-exceptions -m32

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3  
-INLINE:aggressive=on -OPT:IEEE\_arith=3  
-OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on  
-OPT:malloc\_alg=1 -CG:load\_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc  
-Mprefetch=nta -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed  
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge  
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse  
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0  
-Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:prefer\_lru\_reg=off  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 118**

ProLiant DL585 G5  
(2.8 GHz AMD Opteron 8386 SE)

**SPECfp\_rate\_base2006 = 107**

**CPU2006 license:** 3

**Test date:** Jan-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2008

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur  
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge  
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64  
-Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-OPT:malloc\_alg=1 -m3dnow  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 118**

ProLiant DL585 G5  
(2.8 GHz AMD Opteron 8386 SE)

**SPECfp\_rate\_base2006 = 107**

**CPU2006 license:** 3

**Test date:** Jan-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2008

## Peak Other Flags (Continued)

481.wrf: No flags used

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.00.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.html)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.00.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.xml)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 22:38:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 February 2009.