



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R140a-4
(Intel Xeon E7440)

SPECint®2006 = 22.6

SPECint_base2006 = 19.7

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: Bull SAS

Test date: Jan-2009

Hardware Availability: Nov-2008

Software Availability: Nov-2008

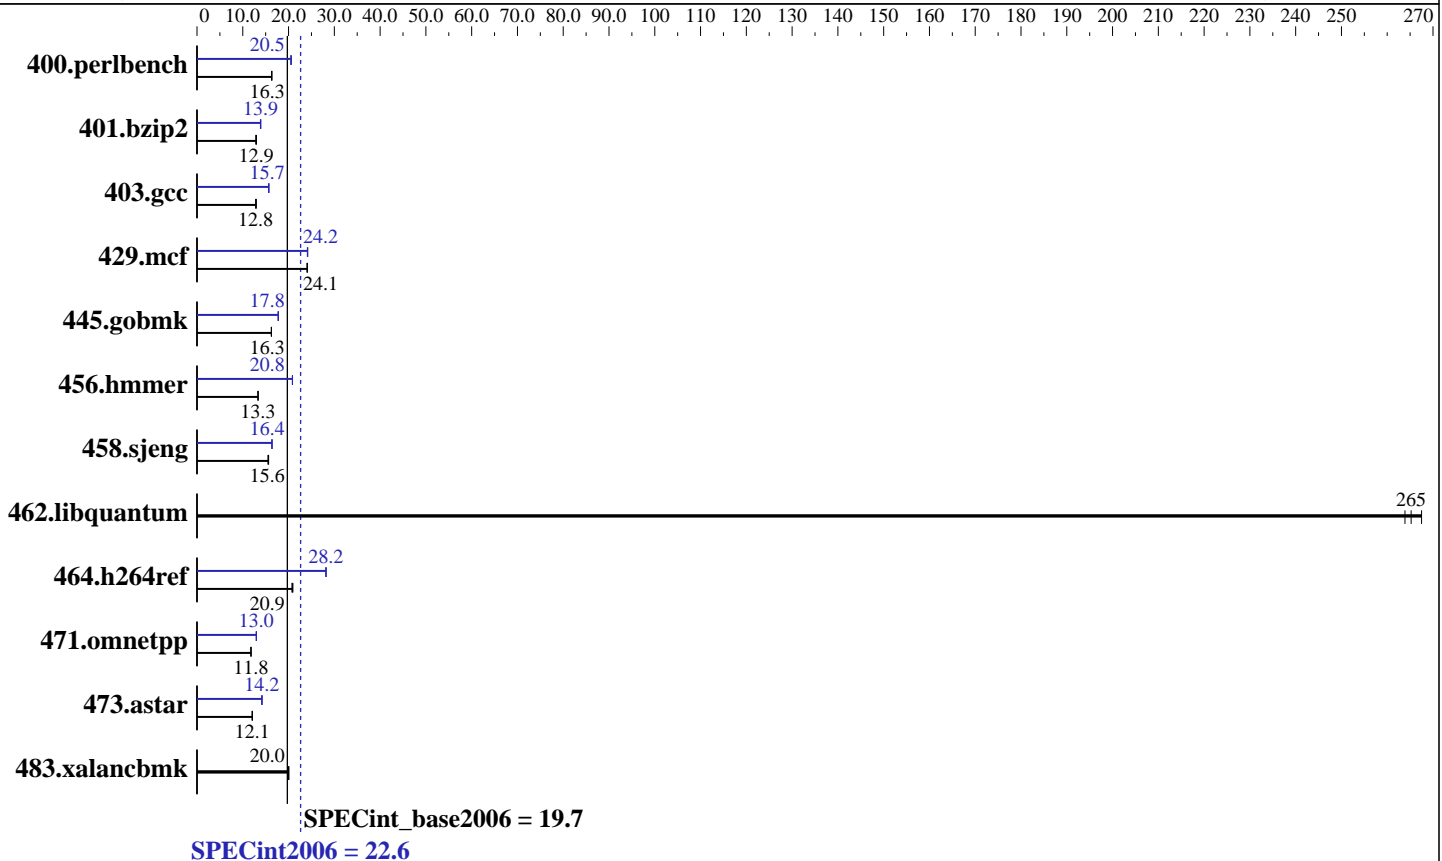

Hardware

CPU Name: Intel Xeon E7440
 CPU Characteristics: 1066 MHz system bus
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip, 3 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (16 x 2GB DDR2-667 FBDIMM)
 Disk Subsystem: 1x146 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2,
Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux
Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R140a-4
(Intel Xeon E7440)

SPECint2006 = **22.6**

SPECint_base2006 = **19.7**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: Bull SAS

Test date: Jan-2009

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	597	16.4	<u>599</u>	<u>16.3</u>	599	16.3	477	20.5	474	20.6	<u>476</u>	<u>20.5</u>
401.bzip2	751	12.8	<u>745</u>	<u>12.9</u>	744	13.0	<u>694</u>	<u>13.9</u>	692	13.9	697	13.9
403.gcc	<u>627</u>	<u>12.8</u>	627	12.8	621	13.0	<u>514</u>	<u>15.7</u>	512	15.7	514	15.7
429.mcf	379	24.0	378	24.1	<u>379</u>	<u>24.1</u>	<u>377</u>	<u>24.2</u>	378	24.1	377	24.2
445.gobmk	645	16.3	<u>645</u>	<u>16.3</u>	646	16.2	591	17.7	<u>591</u>	<u>17.8</u>	591	17.8
456.hammer	701	13.3	<u>700</u>	<u>13.3</u>	699	13.4	447	20.9	<u>447</u>	<u>20.8</u>	448	20.8
458.sjeng	<u>774</u>	<u>15.6</u>	774	15.6	781	15.5	<u>738</u>	<u>16.4</u>	738	16.4	740	16.4
462.libquantum	<u>78.1</u>	<u>265</u>	77.5	268	78.5	264	<u>78.1</u>	<u>265</u>	77.5	268	78.5	264
464.h264ref	<u>1060</u>	<u>20.9</u>	1057	20.9	1067	20.7	785	28.2	<u>785</u>	<u>28.2</u>	786	28.2
471.omnetpp	531	11.8	529	11.8	<u>530</u>	<u>11.8</u>	<u>482</u>	<u>13.0</u>	482	13.0	483	13.0
473.astar	581	12.1	582	12.1	<u>581</u>	<u>12.1</u>	<u>495</u>	<u>14.2</u>	496	14.1	493	14.2
483.xalancbmk	345	20.0	344	20.0	<u>345</u>	<u>20.0</u>	345	20.0	344	20.0	<u>345</u>	<u>20.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0

Platform Notes

BIOS Settings:
Adjacent Cache Line Prefetch = Enabled
Hardware Prefetcher = Enabled

General Notes

The NEC Express5800/R140a-4(Intel Xeon E7440) and the Bull NovaScale R480 E1(Intel Xeon E7440, 2.40 GHz) models are electronically equivalent. The results have been measured on a Bull NovaScale R480 E1(Intel Xeon E7440, 2.40 GHz) model.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R140a-4
(Intel Xeon E7440)

SPECint2006 = 22.6

SPECint_base2006 = 19.7

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: Bull SAS

Test date: Jan-2009

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 22.6

Express5800/R140a-4
(Intel Xeon E7440)

SPECint_base2006 = 19.7

CPU2006 license: 9006

Test date: Jan-2009

Test sponsor: NEC Corporation

Hardware Availability: Nov-2008

Tested by: Bull SAS

Software Availability: Nov-2008

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R140a-4
(Intel Xeon E7440)

SPECint2006 = 22.6

SPECint_base2006 = 19.7

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: Bull SAS

Test date: Jan-2009

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.01.html>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.01.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:35:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 February 2009.