



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix 4700 Density System (Itanium Processor 9140M 1.66GHz/18M)

SPECfp[®]_rate2006 = Not Run

SPECfp_rate_base2006 = 10600

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Jan-2009

Hardware Availability: Nov-2007

Software Availability: Nov-2008

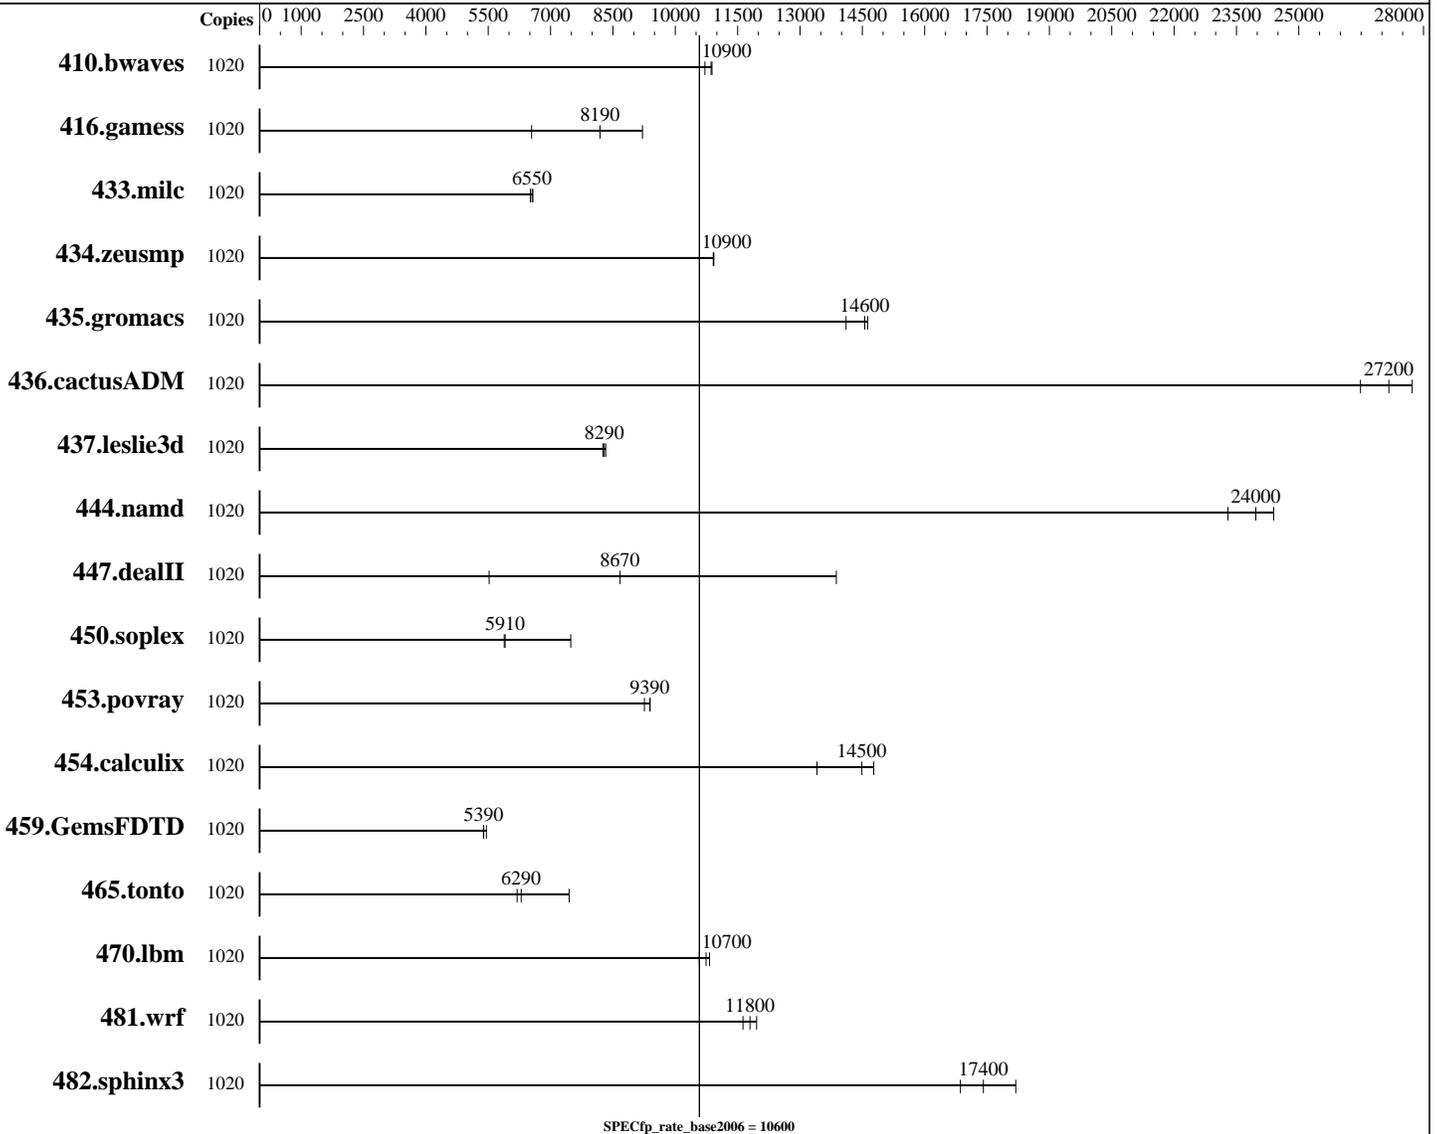

Hardware

CPU Name: Dual-Core Intel Itanium 9140M
 CPU Characteristics: 667MHz FSB
 CPU MHz: 1669
 FPU: Integrated
 CPU(s) enabled: 1024 cores, 512 chips, 2 cores/chip
 CPU(s) orderable: 8 to 512 blades with 2 chips per blade
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (ia64) SP1, Kernel 2.6.16.54-0.2.8.PTF.403865.0-default
 Compiler: Intel Fortran Compiler for Linux 11.1 (Build 20081105)
 Intel C++ Compiler for Linux 11.1 (Build 20081105)
 Auto Parallel: No
 File System: xfs
 System State: Multi-user, run level 3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix 4700 Density System (Itanium Processor 9140M 1.66GHz/18M)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 10600

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jan-2009

Hardware Availability: Nov-2007

Software Availability: Nov-2008

L3 Cache: 9 MB I+D on chip per core
Other Cache: None
Memory: 2 TB (8*1GB DDR2-400 DIMMS per 4 core module)
Disk Subsystem: 23 TB RAID5
160 x 146 GB FC (Seagate Cheetah 15k rpm)
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other Software: SGI ProPack 5 Service Pack 5

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	1020	1274	10900	<u>1276</u>	<u>10900</u>	1294	10700							
416.gamess	1020	<u>2439</u>	<u>8190</u>	3052	6540	2168	9210							
433.milc	1020	1424	6570	<u>1429</u>	<u>6550</u>	1438	6510							
434.zeusmp	1020	851	10900	849	10900	<u>850</u>	<u>10900</u>							
435.gromacs	1020	516	14100	<u>500</u>	<u>14600</u>	498	14600							
436.cactusADM	1020	460	26500	440	27700	<u>449</u>	<u>27200</u>							
437.leslie3d	1020	1161	8260	<u>1157</u>	<u>8290</u>	1152	8330							
444.namd	1020	351	23300	<u>341</u>	<u>24000</u>	335	24400							
447.dealII	1020	841	13900	2113	5520	<u>1346</u>	<u>8670</u>							
450.soplex	1020	<u>1440</u>	<u>5910</u>	1445	5890	1136	7490							
453.povray	1020	578	9390	586	9260	<u>578</u>	<u>9390</u>							
454.calculix	1020	570	14800	<u>581</u>	<u>14500</u>	628	13400							
459.GemsFDTD	1020	1984	5460	2010	5380	<u>2008</u>	<u>5390</u>							
465.tonto	1020	1620	6200	<u>1595</u>	<u>6290</u>	1348	7450							
470.lbm	1020	<u>1305</u>	<u>10700</u>	1325	10600	1295	10800							
481.wrf	1020	953	12000	980	11600	<u>966</u>	<u>11800</u>							
482.sphinx3	1020	1179	16900	<u>1142</u>	<u>17400</u>	1093	18200							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

```
Processes were bound to CPUs using dplace.
limit stacksize unlimited
echo 0 > /dev/cpuset/memory_spread_slab
echo 0 > /dev/cpuset/memory_spread_page
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix 4700 Density System (Itanium Processor 9140M 1.66GHz/18M)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 10600

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jan-2009

Hardware Availability: Nov-2007

Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_LINUX64_IPF
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -fp-relaxed -opt-prefetch-next-iteration -ansi-alias

C++ benchmarks:

-fast -fp-relaxed -opt-prefetch-next-iteration -ansi-alias

Fortran benchmarks:

-fast -fp-relaxed -opt-prefetch-next-iteration

Benchmarks using both Fortran and C:

-fast -fp-relaxed -opt-prefetch-next-iteration -ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix 4700 Density System (Itanium Processor 9140M 1.66GHz/18M)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 10600

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jan-2009

Hardware Availability: Nov-2007

Software Availability: Nov-2008

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-ipf.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-ipf.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:12:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 February 2009.