



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]2006 = 20.3

IBM System x3755 (AMD Opteron 8378)

SPECfp_base2006 = 19.1

CPU2006 license: 11


Test date: Feb-2009

Test sponsor: IBM Corporation

Hardware Availability: Mar-2009

Tested by: Advanced Micro Devices

Software Availability: May-2008

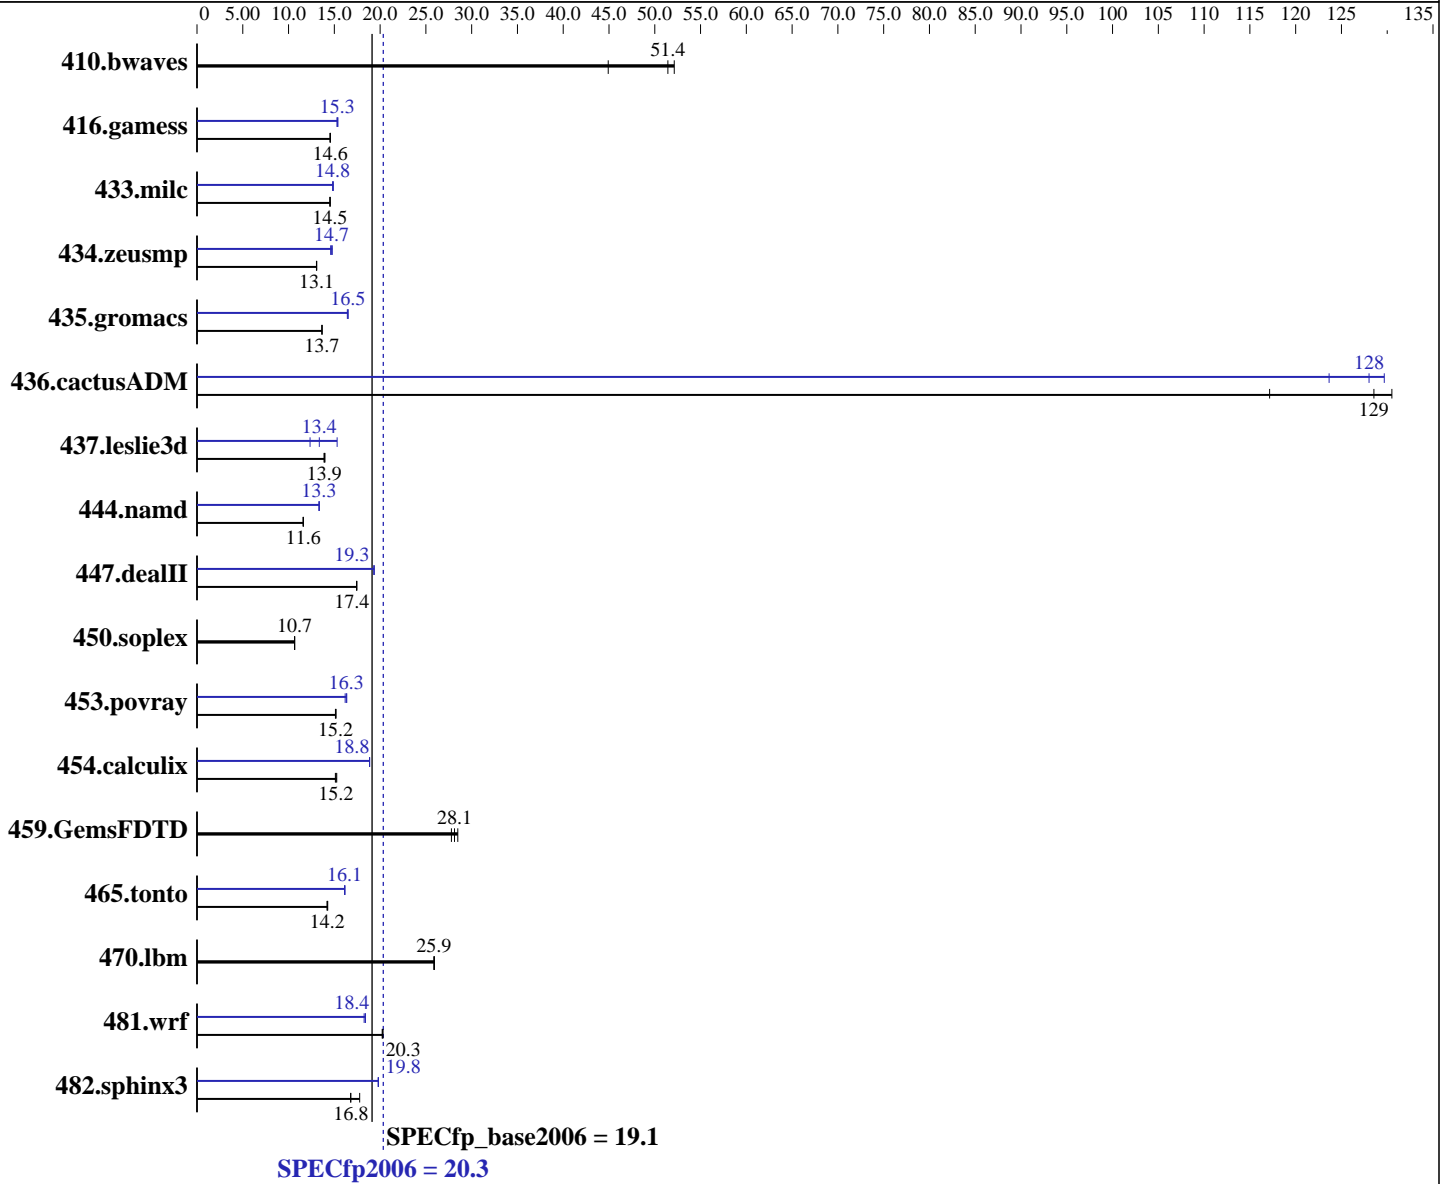

Hardware

CPU Name: AMD Opteron 8378
 CPU Characteristics:
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 64-bit
 Other Software: binutils 2.18.50

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 20.3

IBM System x3755 (AMD Opteron 8378)

SPECfp_base2006 = 19.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: Advanced Micro Devices

Test date: Feb-2009
Hardware Availability: Mar-2009
Software Availability: May-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16 x 4 GB, DDR2-667 CL5 Reg Dual Rank)
Disk Subsystem: 1 x 73.4 GB SAS, 15000 RPM
Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	303	44.9	<u>264</u>	<u>51.4</u>	261	52.1	303	44.9	<u>264</u>	<u>51.4</u>	261	52.1
416.gamess	1348	14.5	<u>1344</u>	<u>14.6</u>	1344	14.6	1272	15.4	<u>1277</u>	<u>15.3</u>	1281	15.3
433.milc	631	14.6	633	14.5	<u>631</u>	<u>14.5</u>	617	14.9	619	14.8	<u>619</u>	<u>14.8</u>
434.zeusmp	696	13.1	697	13.0	<u>697</u>	<u>13.1</u>	624	14.6	616	14.8	<u>619</u>	<u>14.7</u>
435.gromacs	523	13.7	523	13.7	<u>523</u>	<u>13.7</u>	<u>433</u>	<u>16.5</u>	433	16.5	435	16.4
436.cactusADM	102	117	91.6	131	<u>93.0</u>	<u>129</u>	96.6	124	92.2	130	<u>93.3</u>	<u>128</u>
437.leslie3d	672	14.0	677	13.9	<u>675</u>	<u>13.9</u>	<u>704</u>	<u>13.4</u>	761	12.3	614	15.3
444.namd	<u>690</u>	<u>11.6</u>	690	11.6	692	11.6	601	13.3	<u>601</u>	<u>13.3</u>	601	13.3
447.dealII	<u>656</u>	<u>17.4</u>	656	17.4	656	17.4	592	19.3	591	19.4	<u>592</u>	<u>19.3</u>
450.soplex	783	10.6	781	10.7	<u>782</u>	<u>10.7</u>	783	10.6	781	10.7	<u>782</u>	<u>10.7</u>
453.povray	350	15.2	352	15.1	<u>351</u>	<u>15.2</u>	325	16.4	329	16.2	<u>326</u>	<u>16.3</u>
454.calculix	546	15.1	541	15.3	<u>543</u>	<u>15.2</u>	<u>438</u>	<u>18.8</u>	438	18.8	437	18.9
459.GemsFDTD	382	27.8	372	28.5	<u>377</u>	<u>28.1</u>	382	27.8	372	28.5	<u>377</u>	<u>28.1</u>
465.tonto	<u>692</u>	<u>14.2</u>	692	14.2	689	14.3	609	16.2	<u>610</u>	<u>16.1</u>	610	16.1
470.lbm	530	25.9	531	25.9	<u>531</u>	<u>25.9</u>	530	25.9	531	25.9	<u>531</u>	<u>25.9</u>
481.wrf	<u>550</u>	<u>20.3</u>	550	20.3	552	20.2	607	18.4	<u>607</u>	<u>18.4</u>	612	18.3
482.sphinx3	<u>1160</u>	<u>16.8</u>	1097	17.8	1162	16.8	983	19.8	<u>984</u>	<u>19.8</u>	985	19.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.

Operating System Notes

Environment stack size set to 'unlimited'.
The powersaved was disabled, set the CPU frequency to its maximum.
Total number of huge pages available is 14336.
'ulimit -l 2097152' was used to set environment locked pages in memory quantity.
Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 20.3

IBM System x3755 (AMD Opteron 8378)

SPECfp_base2006 = 19.1

CPU2006 license: 11

Test date: Feb-2009

Test sponsor: IBM Corporation

Hardware Availability: Mar-2009

Tested by: Advanced Micro Devices

Software Availability: May-2008

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/work/cpu2006v1.1/pgi72/linux_lib64:/root/work/cpu2006v1.1/pgi72/linux_lib32"

NCPUS = "16"

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mconcur
-Mfprelaxed -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 20.3

IBM System x3755 (AMD Opteron 8378)

SPECfp_base2006 = 19.1

CPU2006 license: 11

Test date: Feb-2009

Test sponsor: IBM Corporation

Hardware Availability: Mar-2009

Tested by: Advanced Micro Devices

Software Availability: May-2008

Base Optimization Flags (Continued)

C++ benchmarks:

```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mconcur --zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64  
-Bstatic_pgi
```

Fortran benchmarks:

```
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge  
-Mconcur -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mconcur  
-Mfprelaxed -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-Mipa=jobs:8
```

C++ benchmarks:

```
-Mipa=jobs:8
```

Fortran benchmarks:

```
-Mipa=jobs:8
```

Benchmarks using both Fortran and C:

```
-Mipa=jobs:8
```

Peak Compiler Invocation

C benchmarks:

```
pgcc
```

C++ benchmarks:

```
pgcpp
```

Fortran benchmarks:

```
pgf95
```

Benchmarks using both Fortran and C:

```
pgcc pgf95
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 20.3

IBM System x3755 (AMD Opteron 8378)

SPECfp_base2006 = 19.1

CPU2006 license: 11

Test date: Feb-2009

Test sponsor: IBM Corporation

Hardware Availability: Mar-2009

Tested by: Advanced Micro Devices

Software Availability: May-2008

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Msafeptr -Mconcur -Mfprelaxed -Mipa=inline -Mipa=arg
-Mipa=const -Mipa=ptr -Mipa=shape -tp barcelona-64
-Bstatic_pgi

470.lbm: basepeak = yes

482.sphinx3: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Mfprelaxed -Msmartalloc -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

447.dealII: -Mvect=cachesize:6291456 -fastsse -alias=ansi
-Msmartalloc=huge -Mprefetch=t0 -Mnovect -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-32
-Bstatic_pgi

450.soplex: basepeak = yes

453.povray: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inlinenopfo:3(pass 2)
-Mipa=staticfunc(pass 2) -Mvect=cachesize:6291456 -fastsse

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 20.3

IBM System x3755 (AMD Opteron 8378)

SPECfp_base2006 = 19.1

CPU2006 license: 11

Test date: Feb-2009

Test sponsor: IBM Corporation

Hardware Availability: Mar-2009

Tested by: Advanced Micro Devices

Software Availability: May-2008

Peak Optimization Flags (Continued)

453.povray (continued):

-Msmartalloc=huge -Mprefetch=t0 -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Msmartalloc=huge -Mvect=noaltcode -Mprefetch=t0
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Mconcur
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mconcur=noaltcode(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: basepeak = yes

465.tonto: -Mvect=cachesize:6291456 -fastsse -O4 -Mvect=noaltcode
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfprelaxed -Mipa=fast -Mipa=inline -tp barcelona-64
-Bstatic_pgi

Benchmarks using both Fortran and C:

435.gromacs: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mfprelaxed -Mconcur -Mfpapprox=rsqrt -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mfprelaxed -Mconcur -Mdse -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mloop32 -Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

481.wrf: -Mvect=cachesize:6291456 -fastsse -Mvect=noaltcode
-Msmartalloc=huge -Mprefetch=distance:8 -Mconcur=noaltcode
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 20.3

IBM System x3755 (AMD Opteron 8378)

SPECfp_base2006 = 19.1

CPU2006 license: 11

Test date: Feb-2009

Test sponsor: IBM Corporation

Hardware Availability: Mar-2009

Tested by: Advanced Micro Devices

Software Availability: May-2008

Peak Other Flags

C benchmarks:

-Mipa=jobs:8(pass 2)

C++ benchmarks:

-Mipa=jobs:8(pass 2)

Fortran benchmarks:

-Mipa=jobs:8

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:8(pass 2)

481.wrf: No flags used

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 22:31:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 March 2009.