



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/iR110a-1H
(Intel Core 2 Duo T9400)

SPECint[®]2006 = **22.0**

SPECint_base2006 = **19.7**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2009

Hardware Availability: Jan-2009

Software Availability: Nov-2008

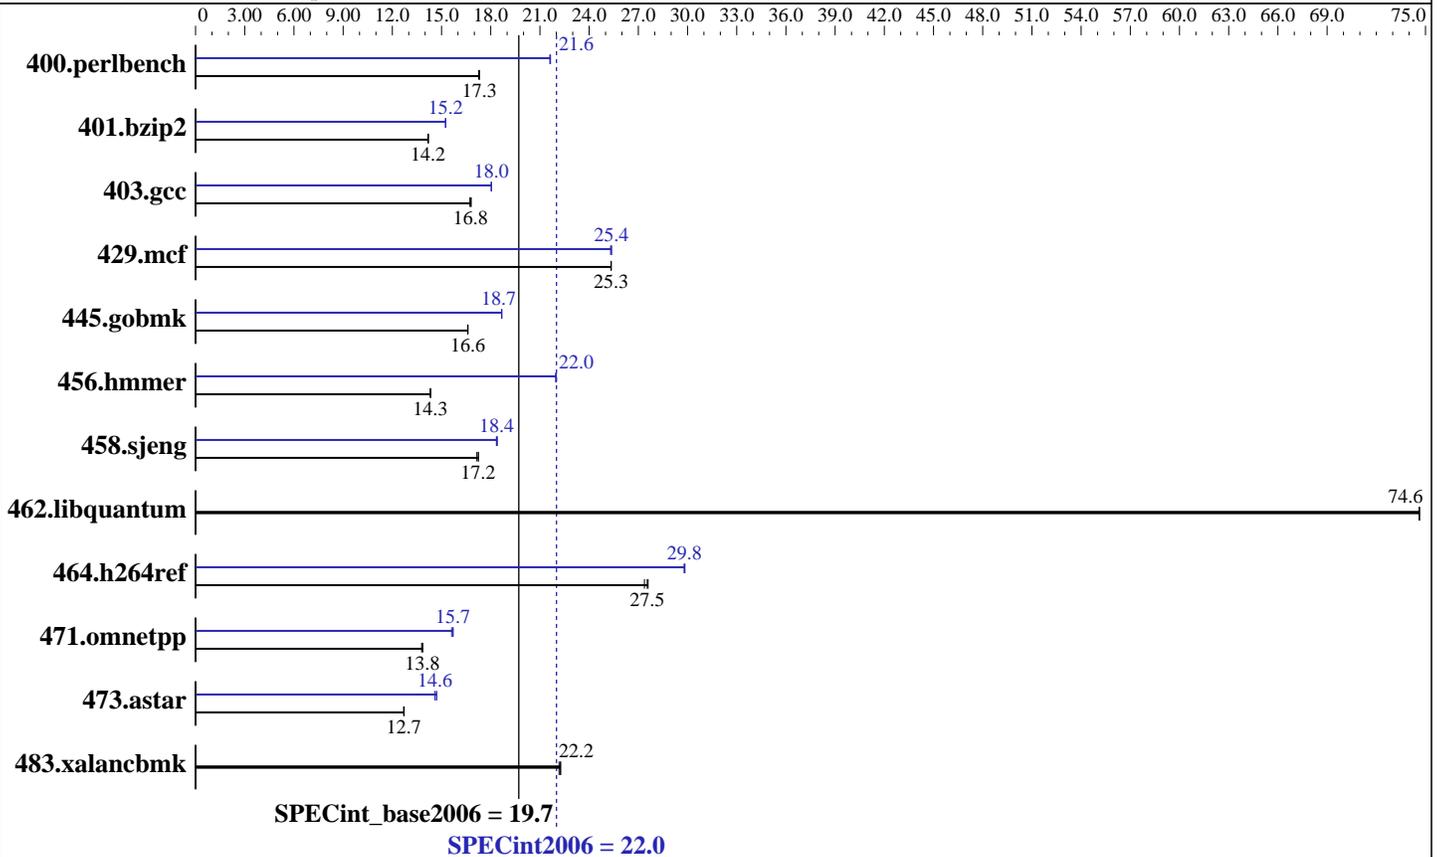

Hardware

CPU Name: Intel Core 2 Duo T9400
 CPU Characteristics: 1066 MHz system bus
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4x2 GB PC2-5300P, 1 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x160 GB SATAII, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/iR110a-1H
(Intel Core 2 Duo T9400)

SPECint2006 = **22.0**

SPECint_base2006 = **19.7**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2009

Hardware Availability: Jan-2009

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	564	17.3	566	17.3	<u>565</u>	<u>17.3</u>	<u>452</u>	<u>21.6</u>	451	21.6	452	21.6
401.bzip2	<u>680</u>	<u>14.2</u>	680	14.2	681	14.2	632	15.3	<u>633</u>	<u>15.2</u>	633	15.2
403.gcc	481	16.7	<u>480</u>	<u>16.8</u>	479	16.8	447	18.0	446	18.0	<u>446</u>	<u>18.0</u>
429.mcf	360	25.3	360	25.3	<u>360</u>	<u>25.3</u>	360	25.3	360	25.4	<u>360</u>	<u>25.4</u>
445.gobmk	632	16.6	632	16.6	<u>632</u>	<u>16.6</u>	562	18.7	562	18.7	<u>562</u>	<u>18.7</u>
456.hammer	<u>651</u>	<u>14.3</u>	651	14.3	651	14.3	<u>424</u>	<u>22.0</u>	425	22.0	424	22.0
458.sjeng	702	17.2	705	17.2	<u>702</u>	<u>17.2</u>	657	18.4	660	18.3	<u>659</u>	<u>18.4</u>
462.libquantum	<u>278</u>	<u>74.6</u>	278	74.6	278	74.6	<u>278</u>	<u>74.6</u>	278	74.6	278	74.6
464.h264ref	808	27.4	<u>804</u>	<u>27.5</u>	802	27.6	742	29.8	743	29.8	<u>742</u>	<u>29.8</u>
471.omnetpp	451	13.9	453	13.8	<u>452</u>	<u>13.8</u>	400	15.6	<u>398</u>	<u>15.7</u>	398	15.7
473.astar	553	12.7	552	12.7	<u>553</u>	<u>12.7</u>	481	14.6	477	14.7	<u>480</u>	<u>14.6</u>
483.xalancbmk	<u>310</u>	<u>22.2</u>	310	22.3	311	22.2	<u>310</u>	<u>22.2</u>	310	22.3	311	22.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"

Platform Notes

Bios settings:
Hardware Prefetcher: Enabled
Adjacent Cache Line Prefetch: Enabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 22.0

Express5800/iR110a-1H
(Intel Core 2 Duo T9400)

SPECint_base2006 = 19.7

CPU2006 license: 9006

Test date: Feb-2009

Test sponsor: NEC Corporation

Hardware Availability: Jan-2009

Tested by: NEC Corporation

Software Availability: Nov-2008

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/iR110a-1H
(Intel Core 2 Duo T9400)

SPECint2006 = 22.0

SPECint_base2006 = 19.7

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2009

Hardware Availability: Jan-2009

Software Availability: Nov-2008

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/iR110a-1H
(Intel Core 2 Duo T9400)

SPECint2006 = 22.0

SPECint_base2006 = 19.7

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2009

Hardware Availability: Jan-2009

Software Availability: Nov-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:30:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 March 2009.