



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp®_rate2006 = 102

ASUS P6T6 WS REVOLUTION workstation motherboard (Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 98.8

CPU2006 license: 9016


Test date: Feb-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

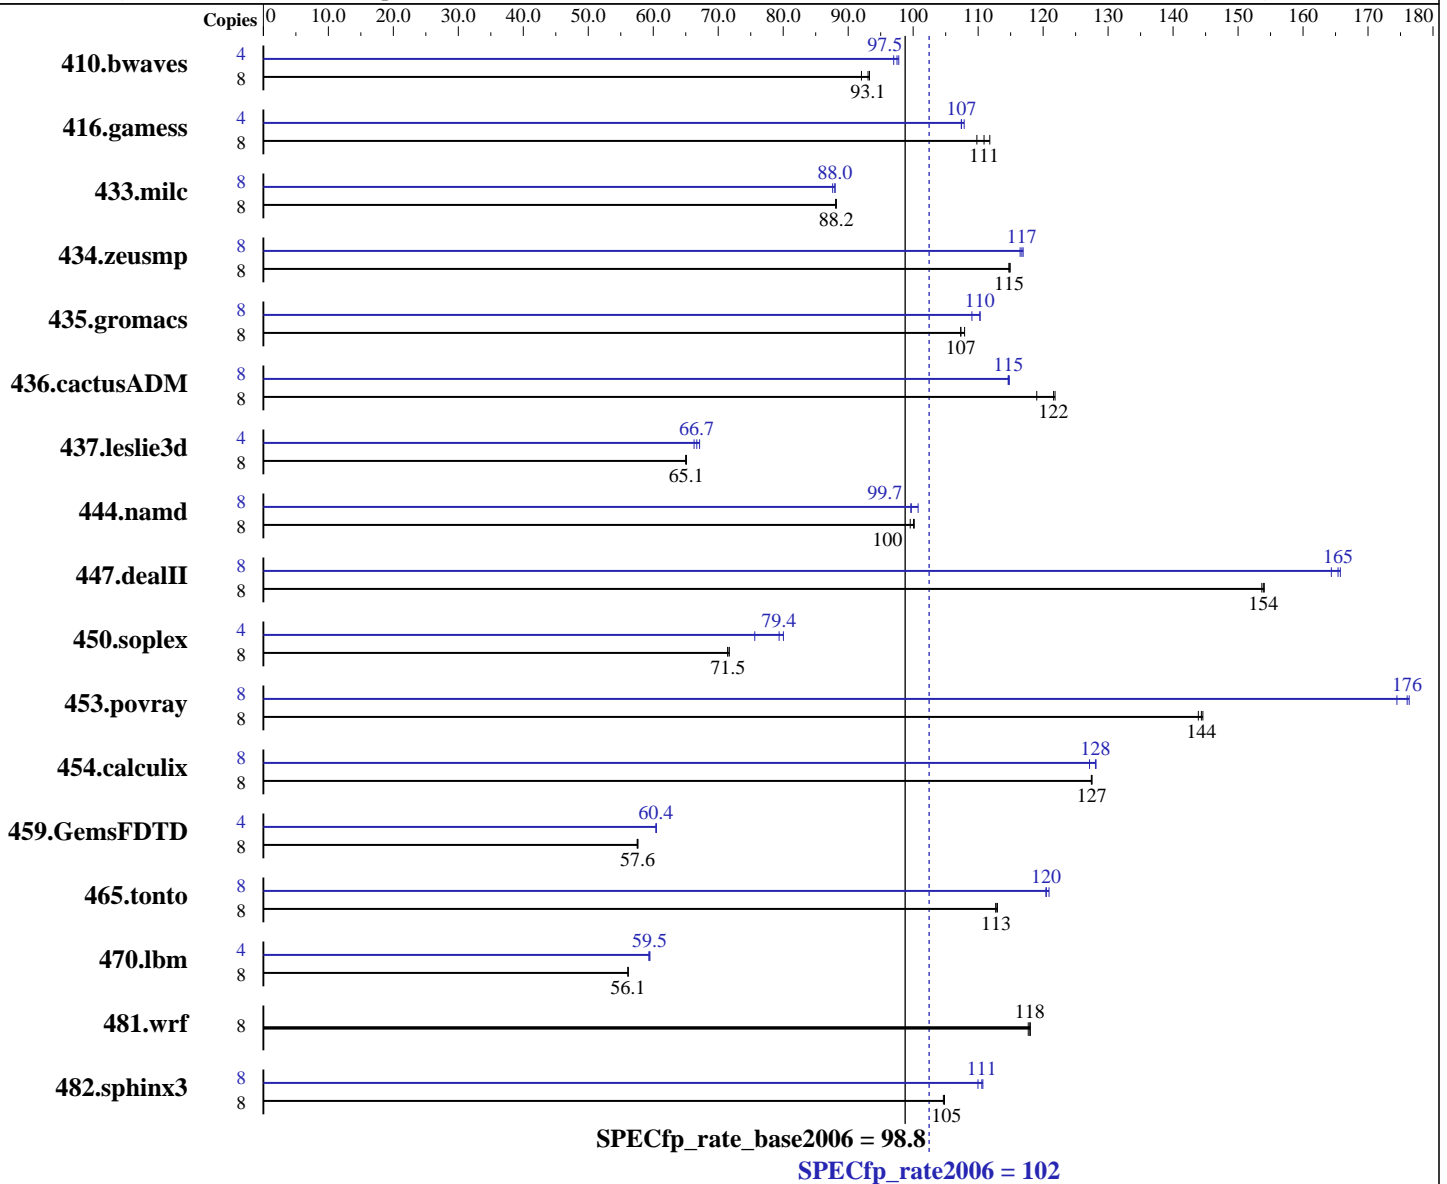

Hardware

CPU Name: Intel Core i7-965 Extreme Edition
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 SP2
 Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux
 Build 20090131 Package ID: L_cproc_p_11.0.080,
 L_prof_p_11.0.080
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 102

ASUS P6T6 WS REVOLUTION workstation motherboard
(Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 98.8

CPU2006 license: 9016

Test date: Feb-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 12 GB (6 x 2 GB PC3-10600E, CL=9)
Disk Subsystem: HITACHI HDT725050VLA360 500GB SATAII, 7200RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1181	92.0	1166	93.3	1168	93.1	4	557	97.5	556	97.8	560	97.0
416.gamess	8	1412	111	1401	112	1427	110	4	726	108	729	107	729	107
433.milc	8	833	88.2	834	88.1	833	88.2	8	835	88.0	838	87.6	835	88.0
434.zeusmp	8	633	115	634	115	635	115	8	625	116	624	117	623	117
435.gromacs	8	532	107	532	107	529	108	8	518	110	524	109	518	110
436.cactusADM	8	803	119	786	122	785	122	8	833	115	834	115	834	115
437.leslie3d	8	1155	65.1	1155	65.1	1157	65.0	4	564	66.7	567	66.3	560	67.1
444.namd	8	641	100	641	100	645	99.5	8	637	101	644	99.6	643	99.7
447.dealII	8	595	154	596	154	594	154	8	552	166	557	164	553	165
450.soplex	8	933	71.5	930	71.7	934	71.5	4	441	75.6	420	79.4	417	80.0
453.povray	8	294	145	296	144	295	144	8	242	176	244	174	241	176
454.calculix	8	518	127	518	127	518	128	8	515	128	515	128	519	127
459.GemsFDTD	8	1476	57.5	1474	57.6	1473	57.6	4	702	60.4	702	60.5	702	60.4
465.tonto	8	698	113	698	113	697	113	8	654	120	653	120	651	121
470.lbm	8	1958	56.1	1958	56.1	1959	56.1	4	927	59.3	924	59.5	924	59.5
481.wrf	8	757	118	758	118	759	118	8	757	118	758	118	759	118
482.sphinx3	8	1490	105	1488	105	1487	105	8	1418	110	1408	111	1410	111

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS setting:
Hardware Prefetcher: Enabled
Adjacent Cache Line Prefetch: Enabled
Tested system case compliance with Intel ATX spec

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 102

ASUS P6T6 WS REVOLUTION workstation motherboard
(Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 98.8

CPU2006 license: 9016

Test date: Feb-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

Platform Notes (Continued)

600W or higher ATX Power Supply
System was configured with ATi RV530LE discrete graphics card

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 102

ASUS P6T6 WS REVOLUTION workstation motherboard
(Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 98.8

CPU2006 license: 9016

Test date: Feb-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc`

`482.sphinx3: icc -m32`

C++ benchmarks (except as noted below):

`icpc`

`450.soplex: icpc -m32`

Fortran benchmarks (except as noted below):

`ifort`

`437.leslie3d: ifort -m32`

Benchmarks using both Fortran and C:

`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
 416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
 434.zeusmp: `-DSPEC_CPU_LP64`
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
 444.namd: `-DSPEC_CPU_LP64`
 447.dealII: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
 459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`
 470.lbm: `-DSPEC_CPU_LP64`
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 102

ASUS P6T6 WS REVOLUTION workstation motherboard
(Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 98.8

CPU2006 license: 9016

Test date: Feb-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 102

ASUS P6T6 WS REVOLUTION workstation motherboard
(Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 98.8

CPU2006 license: 9016

Test date: Feb-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:29:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 March 2009.