



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro SuperServer 6026T-NTR+ (Intel Xeon E5520, 2.26 GHz)

SPECfp®2006 = 32.0

SPECfp_base2006 = 30.1

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Mar-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

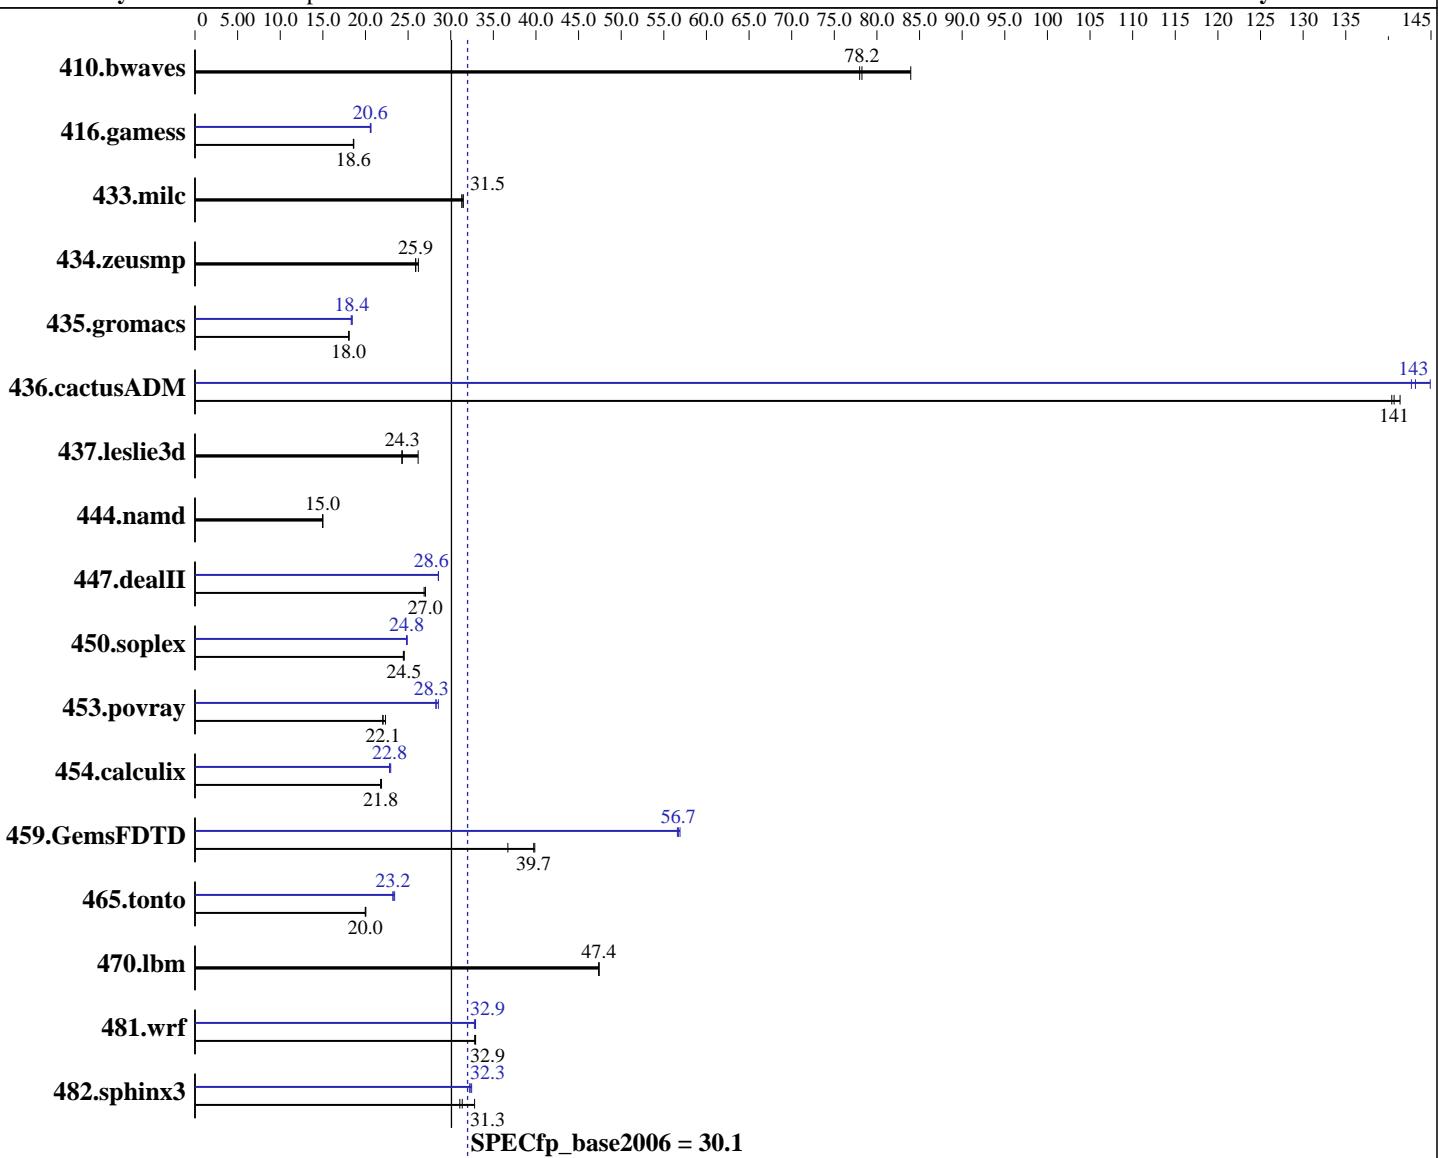

Hardware

CPU Name: Intel Xeon E5520
CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz: 2267
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SuSe Linux SLES10 SP2, Kernel 2.6.16.60-0.34-smp for x86_64
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel: Yes
File System: ReiserFS
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro SuperServer 6026T-NTR+ (Intel Xeon E5520, 2.26 GHz)

SPECfp2006 = 32.0

SPECfp_base2006 = 30.1

CPU2006 license: 13

Test date: Mar-2009

Test sponsor: Intel Corporation

Hardware Availability: Mar-2009

Tested by: Intel Corporation

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (12 x 2GB DDR3-1066, CL7)
 Disk Subsystem: 1 x 150 GB SATA, 10000RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	162	84.0	174	78.0	<u>174</u>	<u>78.2</u>	162	84.0	174	78.0	<u>174</u>	<u>78.2</u>
416.gamess	<u>1053</u>	<u>18.6</u>	1054	18.6	1051	18.6	<u>952</u>	<u>20.6</u>	948	20.6	<u>951</u>	<u>20.6</u>
433.milc	293	31.3	292	31.5	<u>292</u>	<u>31.5</u>	293	31.3	292	31.5	<u>292</u>	<u>31.5</u>
434.zeusmp	347	26.2	<u>352</u>	<u>25.9</u>	352	25.9	<u>347</u>	<u>26.2</u>	<u>352</u>	<u>25.9</u>	352	25.9
435.gromacs	<u>396</u>	<u>18.0</u>	396	18.0	395	18.1	390	18.3	387	18.4	<u>388</u>	<u>18.4</u>
436.cactusADM	85.1	140	84.5	141	<u>84.9</u>	<u>141</u>	82.5	145	83.7	143	<u>83.5</u>	<u>143</u>
437.leslie3d	359	26.2	<u>386</u>	<u>24.3</u>	387	24.3	359	26.2	<u>386</u>	<u>24.3</u>	387	24.3
444.namd	<u>535</u>	<u>15.0</u>	535	15.0	535	15.0	<u>535</u>	<u>15.0</u>	535	15.0	<u>535</u>	15.0
447.dealII	<u>423</u>	<u>27.0</u>	426	26.9	423	27.0	401	28.6	401	28.6	<u>401</u>	<u>28.6</u>
450.soplex	341	24.4	<u>340</u>	<u>24.5</u>	340	24.5	<u>336</u>	<u>24.8</u>	335	24.9	<u>336</u>	<u>24.8</u>
453.povray	242	22.0	238	22.3	<u>241</u>	<u>22.1</u>	186	28.6	188	28.3	<u>188</u>	<u>28.3</u>
454.calculix	377	21.9	<u>378</u>	<u>21.8</u>	379	21.8	361	22.8	<u>361</u>	<u>22.8</u>	359	23.0
459.GemsFDTD	<u>267</u>	<u>39.7</u>	289	36.7	266	39.9	186	56.9	187	56.6	<u>187</u>	<u>56.7</u>
465.tonto	491	20.0	<u>492</u>	<u>20.0</u>	493	20.0	420	23.4	<u>423</u>	<u>23.2</u>	424	23.2
470.lbm	290	47.4	<u>290</u>	<u>47.4</u>	290	47.4	290	47.4	<u>290</u>	<u>47.4</u>	290	47.4
481.wrf	339	32.9	340	32.8	<u>340</u>	<u>32.9</u>	341	32.8	339	32.9	<u>340</u>	<u>32.9</u>
482.sphinx3	594	32.8	<u>622</u>	<u>31.3</u>	627	31.1	<u>604</u>	<u>32.3</u>	605	32.2	601	32.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro SuperServer 6026T-NTR+ (Intel Xeon E5520, 2.26 GHz)

SPECfp2006 = 32.0

SPECfp_base2006 = 30.1

CPU2006 license: 13

Test date: Mar-2009

Test sponsor: Intel Corporation

Hardware Availability: Mar-2009

Tested by: Intel Corporation

Software Availability: Feb-2009

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro SuperServer 6026T-NTR+ (Intel Xeon E5520, 2.26 GHz)

SPECfp2006 = 32.0

SPECfp_base2006 = 30.1

CPU2006 license: 13

Test date: Mar-2009

Test sponsor: Intel Corporation

Hardware Availability: Mar-2009

Tested by: Intel Corporation

Software Availability: Feb-2009

Peak Compiler Invocation (Continued)

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
 434.zeusmp: `-DSPEC_CPU_LP64`
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
 444.namd: `-DSPEC_CPU_LP64`
 447.dealII: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`
 470.lbm: `-DSPEC_CPU_LP64`
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `-xsse4.2 -ipo -O3 -no-prec-div -static -unroll2`

C++ benchmarks:

444.namd: `basepeak = yes`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro SuperServer 6026T-NTR+ (Intel Xeon E5520, 2.26 GHz)

SPECfp2006 = 32.0

SPECfp_base2006 = 30.1

CPU2006 license: 13

Test date: Mar-2009

Test sponsor: Intel Corporation

Hardware Availability: Mar-2009

Tested by: Intel Corporation

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

447.dealII: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep -opt-prefetch

450.soplex: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsse4 .2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xsse4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro SuperServer 6026T-NTR+ (Intel Xeon E5520, 2.26 GHz)

SPECfp2006 = 32.0

SPECfp_base2006 = 30.1

CPU2006 license: 13

Test date: Mar-2009

Test sponsor: Intel Corporation

Hardware Availability: Mar-2009

Tested by: Intel Corporation

Software Availability: Feb-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:28:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 March 2009.